OLD FILE NAME: 094169/A2

PREPARED BY: MAJ	SANDIA NATIONAL LABORATORIES FACILITIES ENGINEERING	DETAIL NO.: AE3024
CHECKED BY: WJC		SCALE: 3" = 1'-0"
DATE: 6-15-01 / REV:	TEMPORARY TIE-IN B.U.R.	ARCHITECTURAL STDROF.DGN

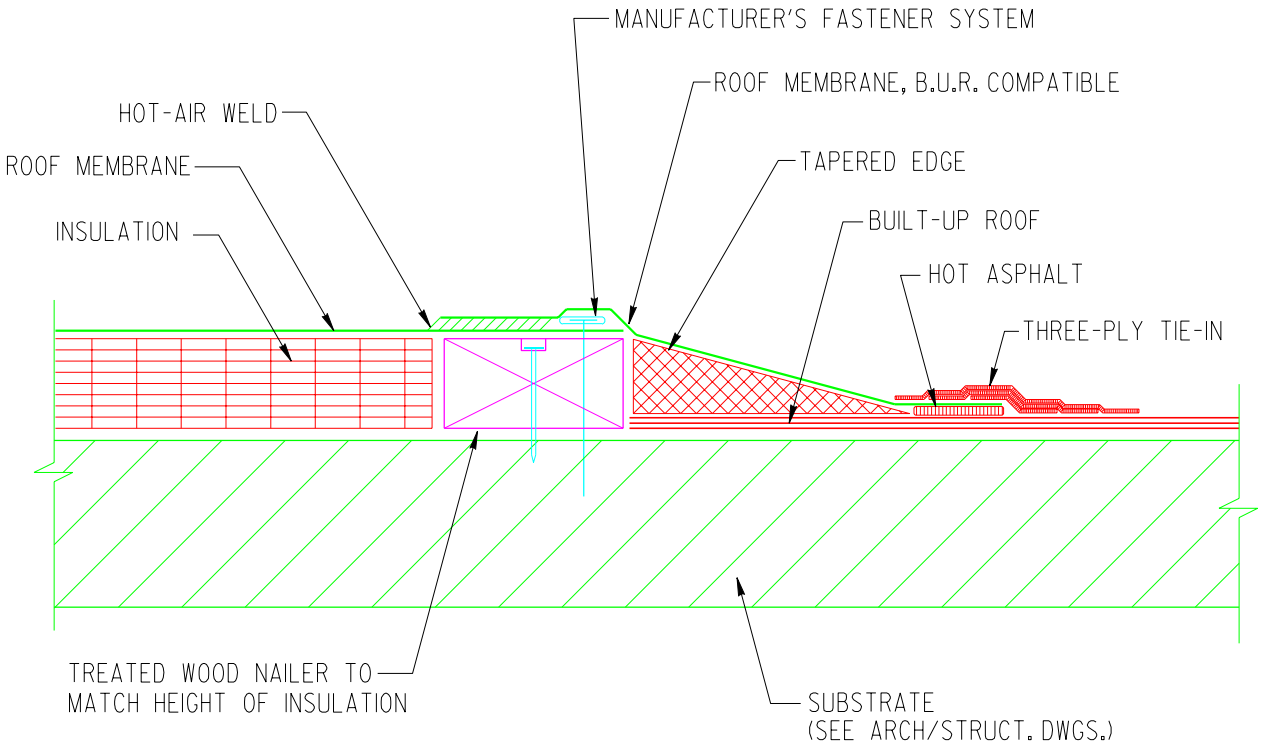

NOTE:

1. NAILERS SHALL BE SECURELY ANCHORED TO THE DECK TO RESIST A FORCE OF 300 POUNDS PER LINEAL FOOT IN ANY DIRECTION.
2. REMOVE ALL GRAVEL AT TIE-IN AREA.
3. CUT BACK AND REMOVE ASPHALT CONTAMINATED MEMBRANE PRIOR TO CONTINUATION OF ROOFING WORK.

"Property of Sandia National Laboratories Facilities Management and Operation Center (FMOC).
No duplication or alteration allowed without the expressed permission and authorization of FMOC."