SAND2001-1840P

12th APS Topical Conference, June 24-29
2001
Atlanta, Georgia
Shock Compression of Condensed Matter

Analysis of Radiation-Driven Jetting Experiments on NOVA and Z

R. J. Lawrence
T. A. Mehlhorn, T. A. Haill, K. G. Budge, T. G. Trucano
K. R. Cochrane,[a] J. J. MacFarlane[b]

Sandia National Laboratories, Albuquerque, NM
[a]Ktech Corporation, Albuquerque, NM
[b]Prism Computational Sciences, Inc., Madison, WI

Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy under contract DE-AC04-94AL85000.

ALEGRA has unique capabilities for addressing SBSS program issues as well as HEDP problems.

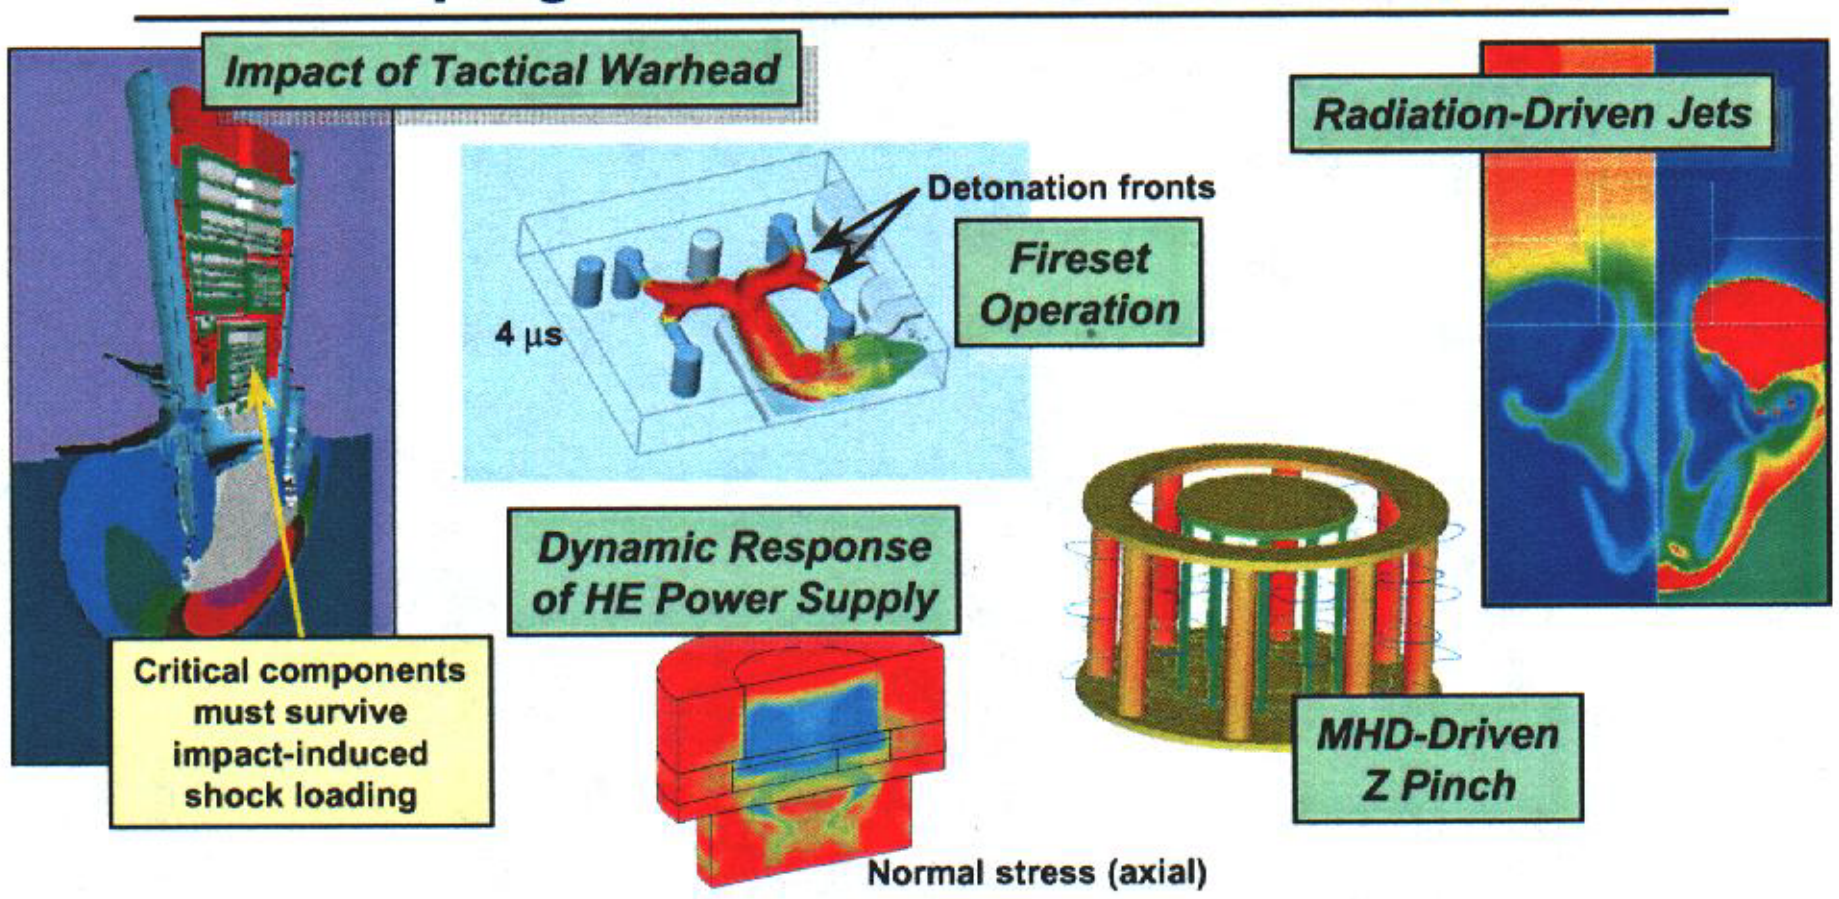

. . . the code combines solid dynamics, fracture, HE, etc., with high-energy features such as MHD and radiation transport.

Sandia National Laboratories

Radiation-Driven Jetting Experiments on NOVA and Z

R. J. Lawrence,
T. A. Mehlhorn, T. A. Haill,
K. G. Budge, T. G. Trucano,
K. R. Cochrane, J. J. MacFarlane



Models have been validated by comparison with experimental results from NOVA.

Similar targets scaled up by an order of magnitude can be studied on Z.

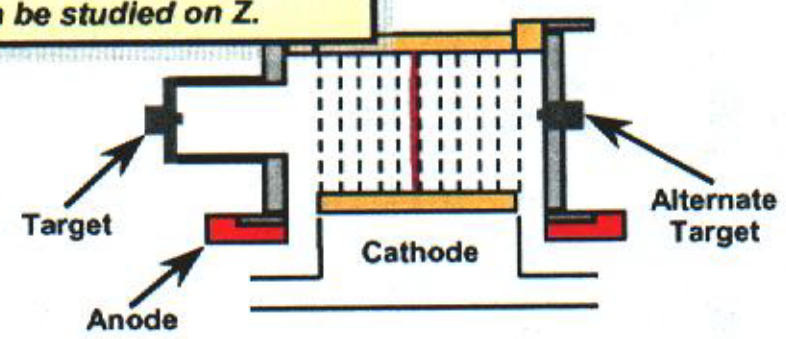

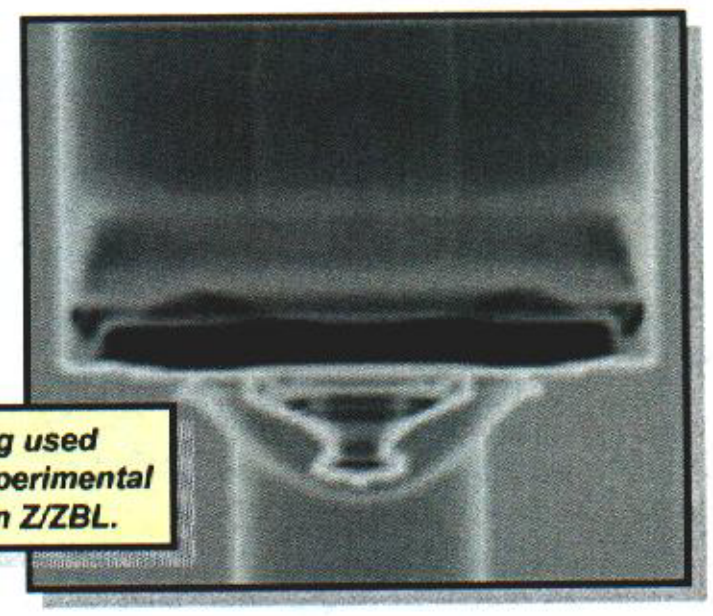

ALEGRA and SPECT3D are being used to calculate and visualize the experimental results of RadJet experiments on Z/ZBL.

The NOVA experiments used radiation from a short-pulse, high-power, laser-driven hohlraum.



The radiation drive was a blackbody temperature history peaking at ~190 eV with a FWHM pulse width of ~5 ns.



The experiment used a laser-driven NOVA hohlraum to expose the sample to a short high-intensity radiation load. The sample response was observed with an x-ray backlighter.



The target configuration consisted of a 150-μm-long aluminum "pin" in a 50-μm-thick gold "washer," which was backed with a 380-μm-diameter polystyrene block.

Sandia National Laboratories

The configuration used for ALEGRA calculations employed an Al "pin" mounted in an Au "washer."

- *For the NOVA problem, the thickness of the aluminum "pin" was 150 μm, the gold washer thickness was 50 μm, and the polystyrene backing had a diameter of 380 μm.*
- *We used a 2-D cylindrical Eulerian mesh with: 1) 4,500 elements (10-μm resolution); and 2) 18,000 elements (5-μm resolution).*
- *The radiation, incident from the top, was treated with single-group, SN_1 radiation transport, with radiation pressure disabled.*

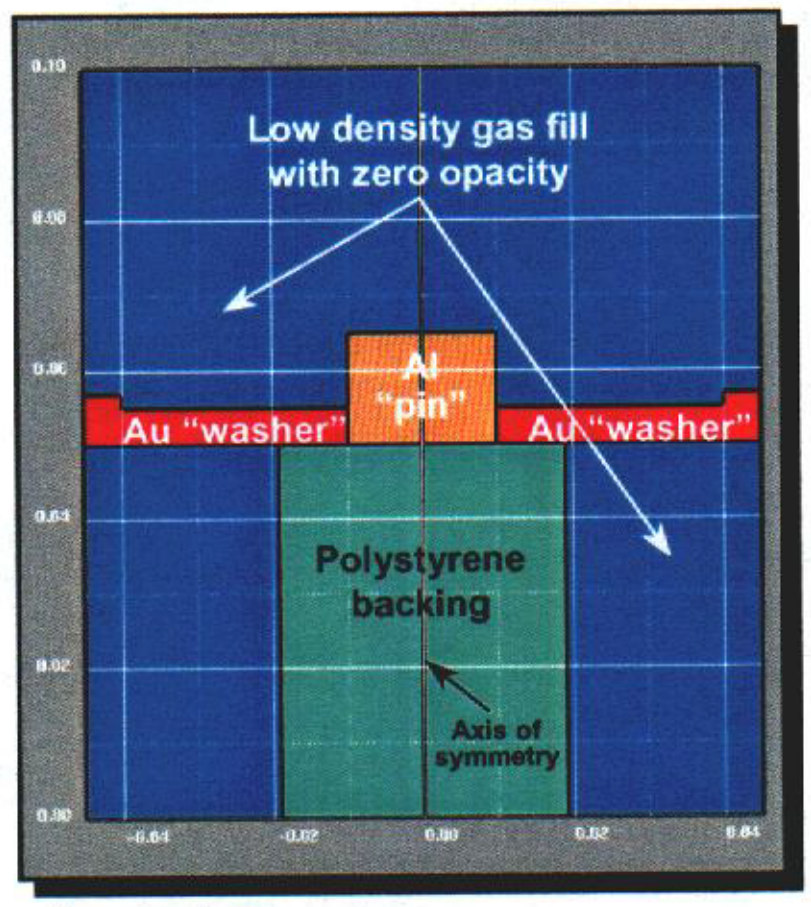

Dimensions in cm

Sandia National Laboratories

For NOVA, fine resolution calculations show more detail and slightly faster on-axis jet motion.

Coarse resolution calculation →

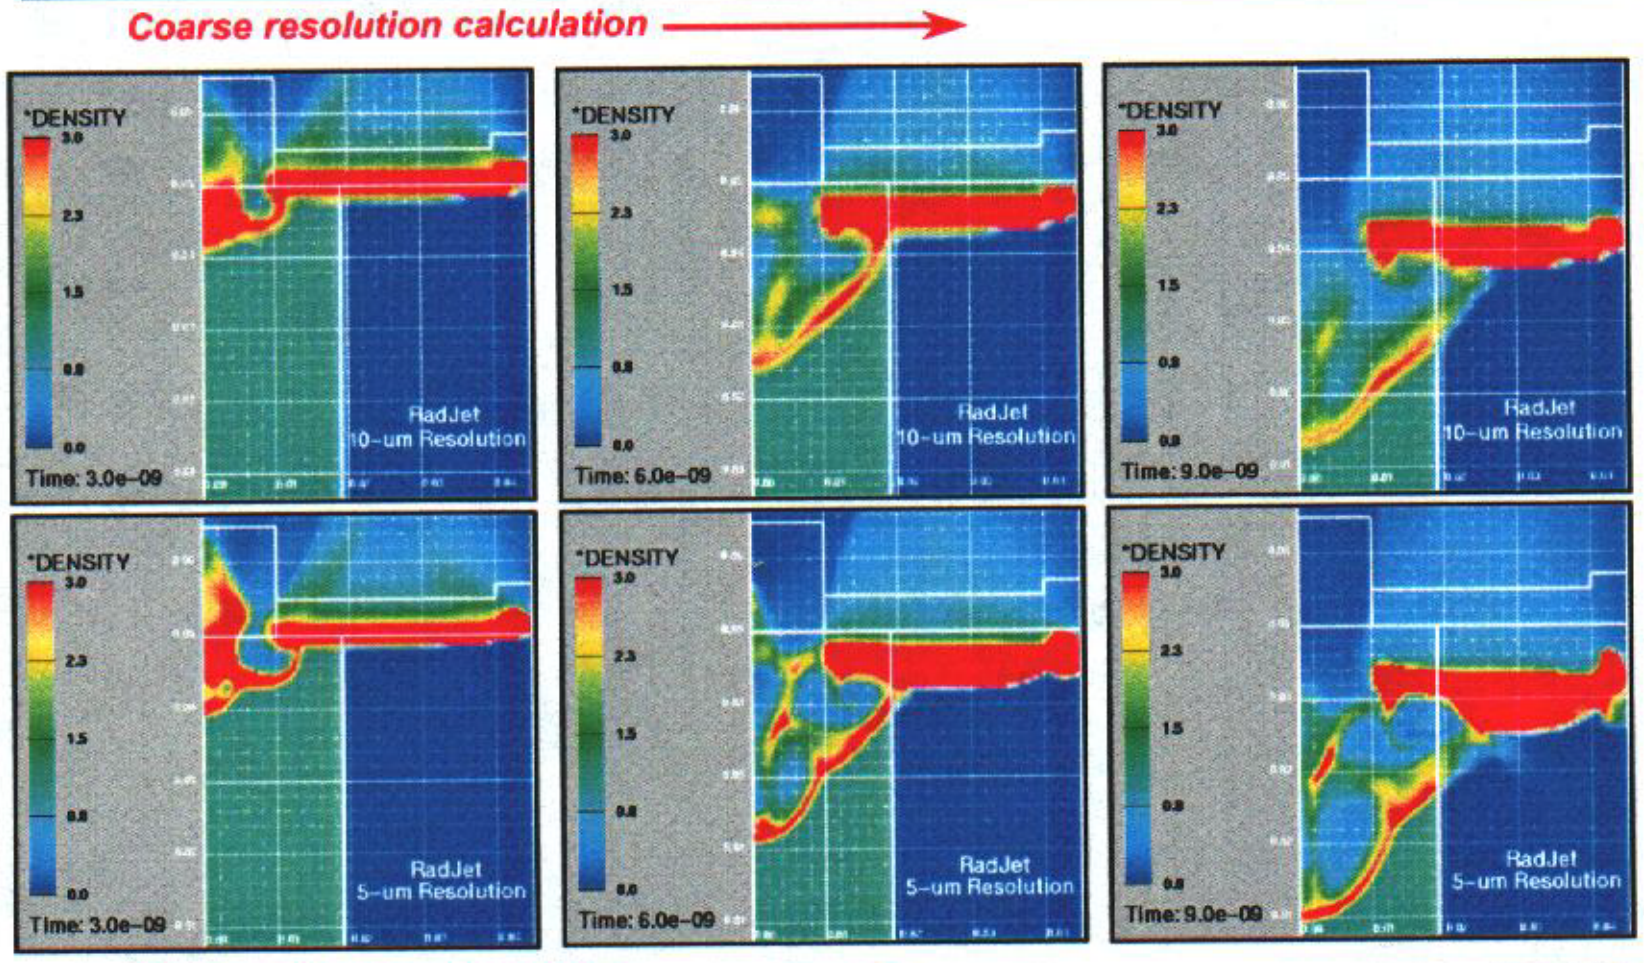

Fine resolution calculation →

Sandia National Laboratories

SPECT3D produces simulated radiographs from ALEGRA rad/hydro output.

Coarse resolution calculation →

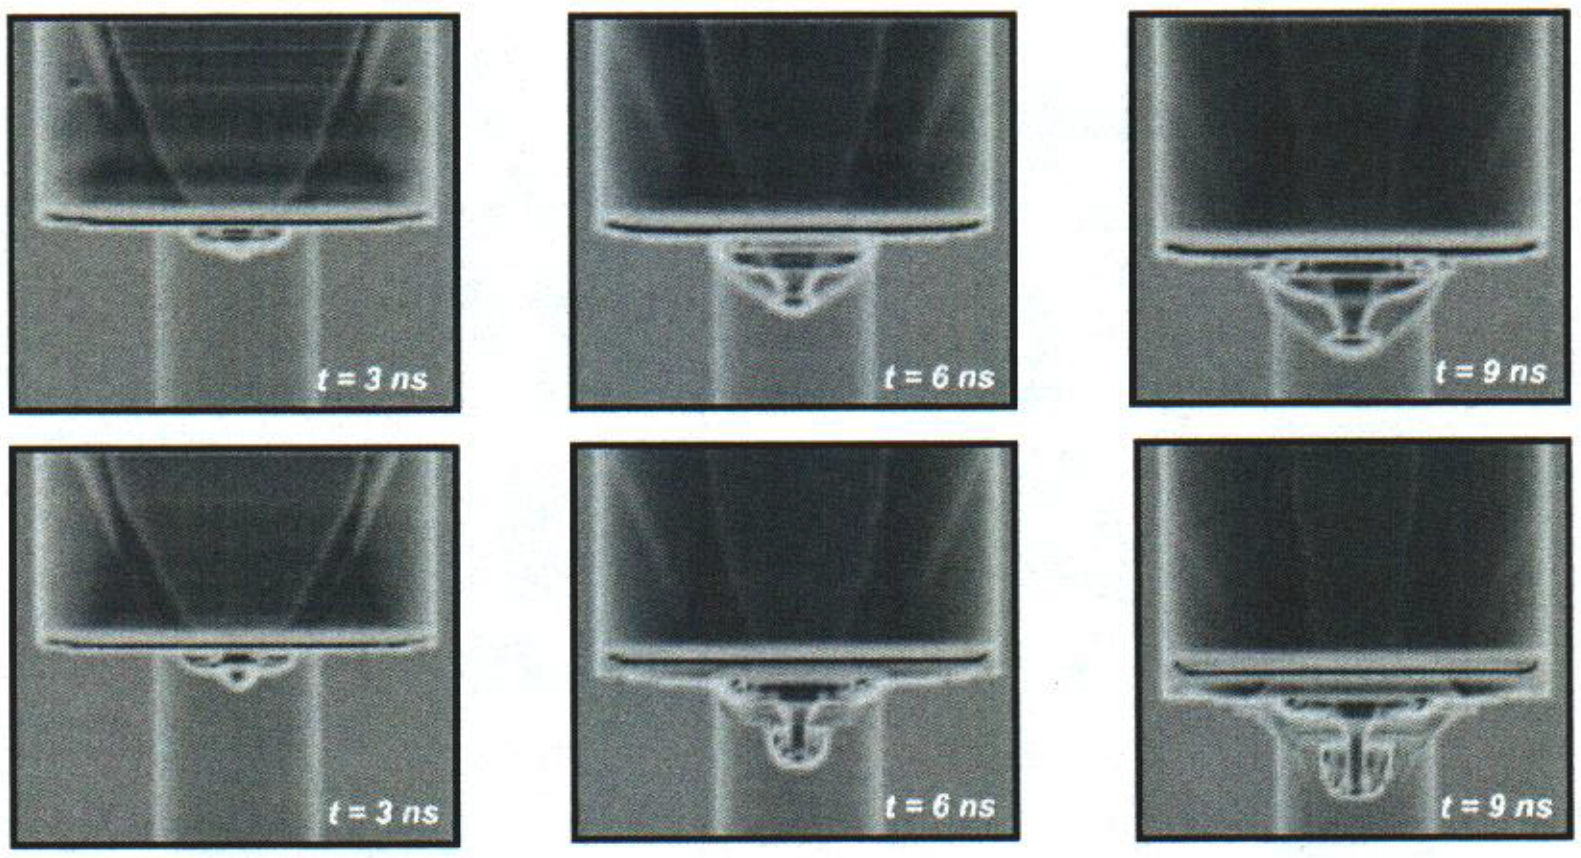

Fine resolution calculation →

Sandia National Laboratories

For this configuration the ALEGRA results are consistent with other codes and the experiment.

Spatial characterization of aluminum jet
(Revised configuration – coarse mesh):

[Axial position of leading edge (μm)]

Code	ALEGRA *(Eulerian)*	PETRA *(Eulerian)*	CALE *(ALE)*	RAGE *(AMR)*	Experiment *(Estimated)*
Time = 6 ns	265	245	300	280	~260
Time = 9 ns	380	345	405	380	300+
Time = 12 ns	460	–	–	–	–

- *At a computational time of 6 ns, ALEGRA predicts the on-axis jet location within about 2% of the estimated experimental result; this result is also consistent with the other computational efforts.*
- *At a time of 9 ns the predicted axial location of the jet is somewhat over 20% greater than the estimated experimental measurement; but as with the earlier time, it agrees very closely with the average of the other code results.*

Sandia National Laboratories

We are now studying the scaling of these RadJet experiments from NOVA to Z.

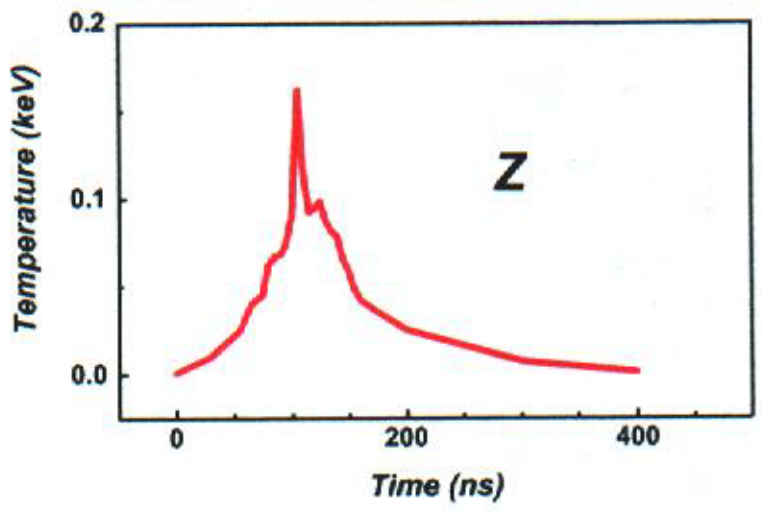

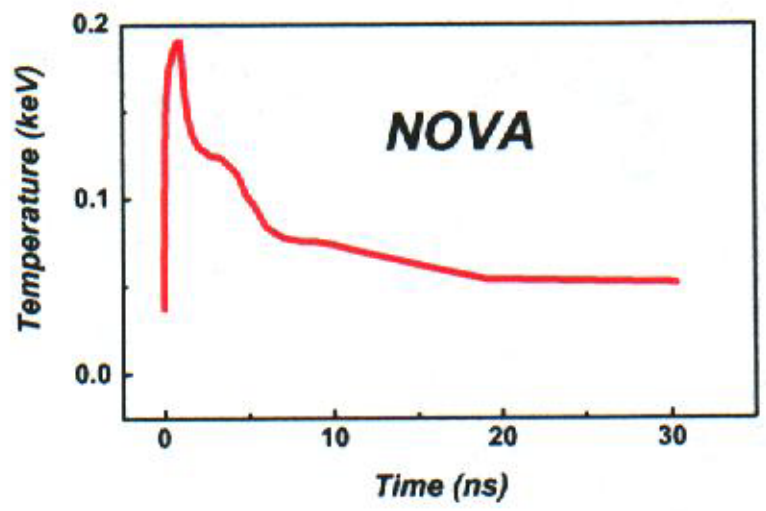

Typical Source Characteristics

Peak temperature:

NOVA	~190 eV
Z	~162 eV

FWHM pulse width:

NOVA	~5 ns
Z	~50 ns

Peak power:

$P_{MAX}(Z)/P_{MAX}(NOVA) \approx 1/2$

Total energy fluence:

$\Phi_{TOT}(Z)/\Phi_{TOT}(NOVA) \approx 3$

- ***Similar mechanical behavior should be obtained by scaling the physical dimensions by about a factor of ten.***
- ***However, the radiation transport will not scale in a similar fashion.***
- ***Source for Z can be modified.***

Sandia National Laboratories

Integrating the temperature curves allows the energy fluences to be compared.

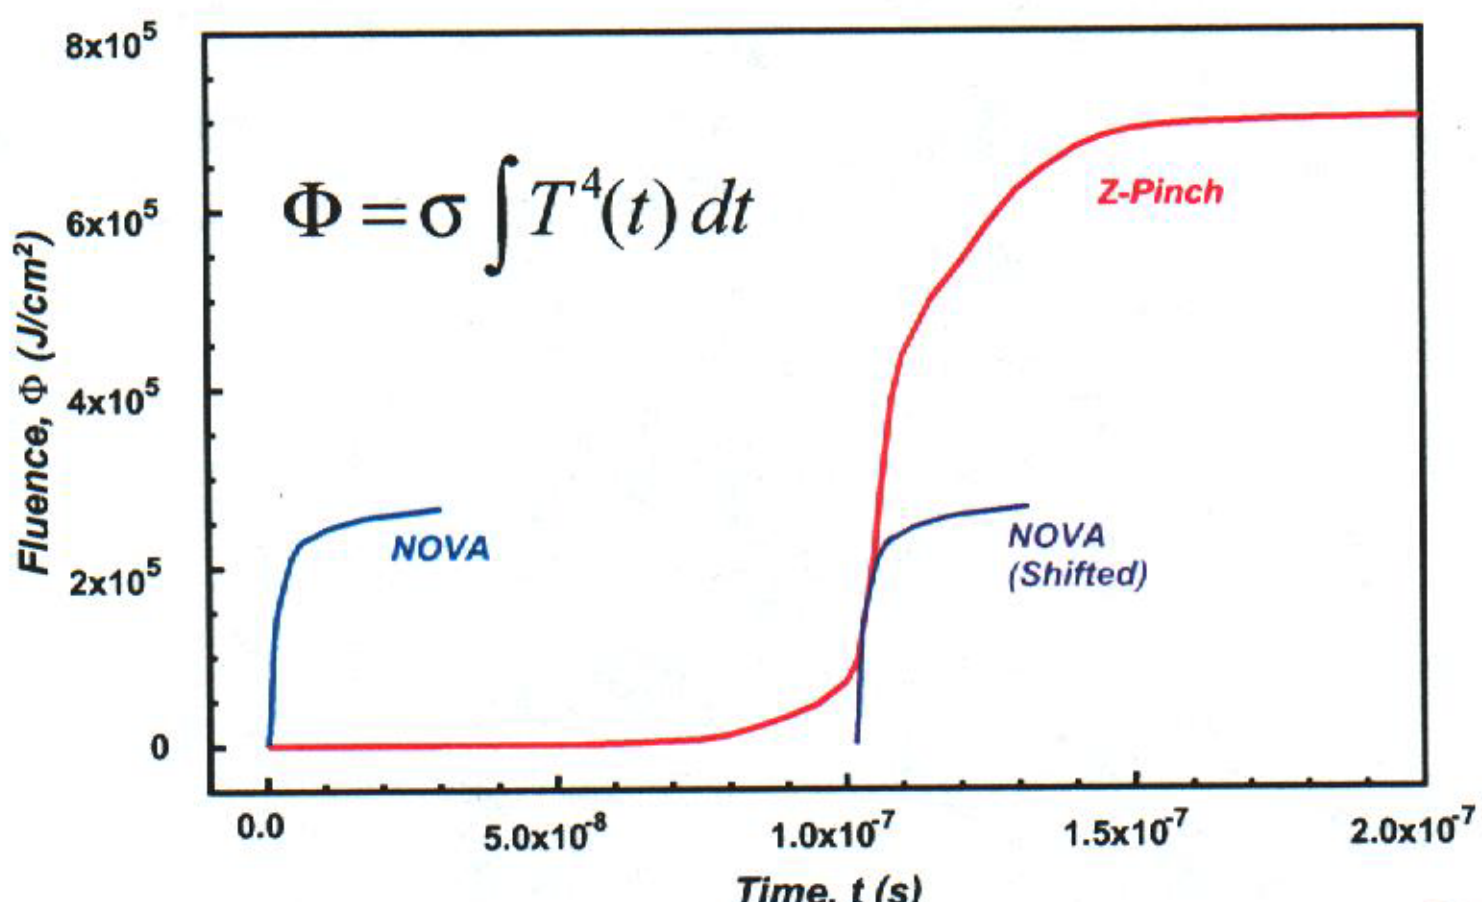

Sandia National Laboratories

The Z experiments would use a longer pulse, but a higher energy Z-pinch-driven hohlraum.

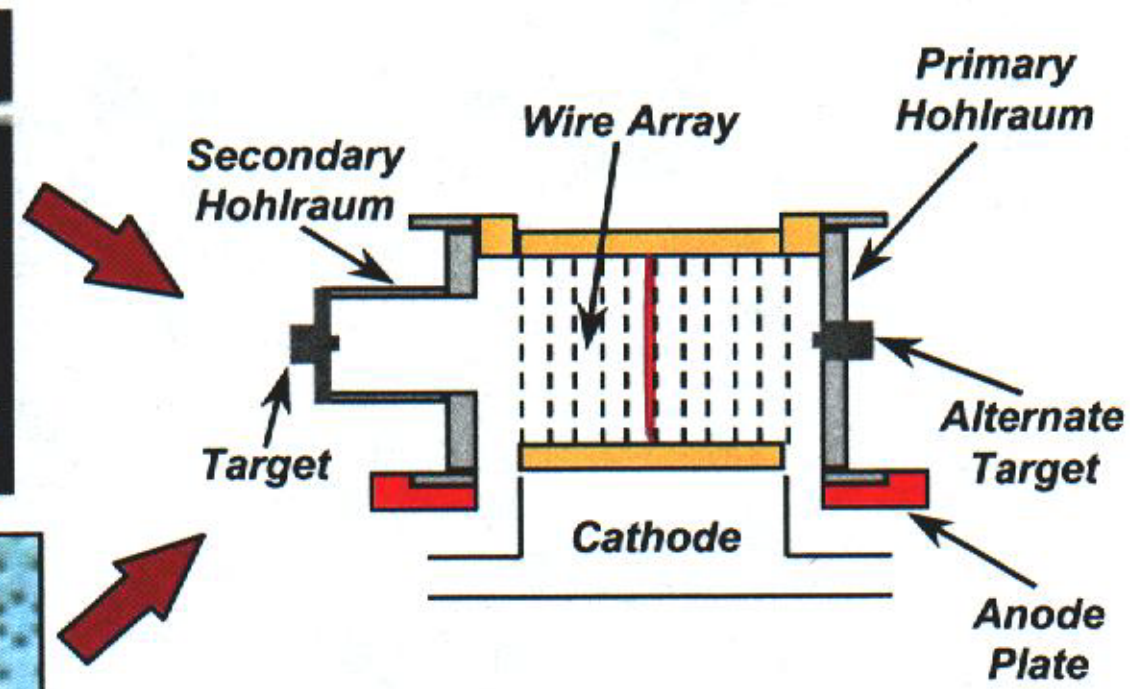

- *The target could be placed in either the primary or a secondary hohlraum.*
- *Principal diagnostics would involve the Z-Beamlet Backlighter that is presently under construction.*

Sandia National Laboratories

There are several points that should be noted with regard to the calculations.

- **The quoted half-max pulse widths are only approximate, but lead to about a factor of ten difference in characteristic response times.**
- **In these calculations the physical dimensions are scaled by exactly a factor of ten for the two cases.**
- **Because the radiation transport phenomena (*e.g.,* opacities) do not scale in the same manner as the hydrodynamic behavior, the total response will not be directly homologous.**
- **The calculations were run with ALEGRA, using 10-μm resolution for the NOVA case and 100-μm resolution for the Z configuration.**
- **Because of the initial slow rise for the radiation drive from Z, the times cannot be shifted in a directly proportional fashion; the comparison plots were chosen for similar stages in the evolution of the response.**

Sandia National Laboratories

The RadJet problem at very early times, with the shock part way through the "pin" . . .

RadJet / NOVA:

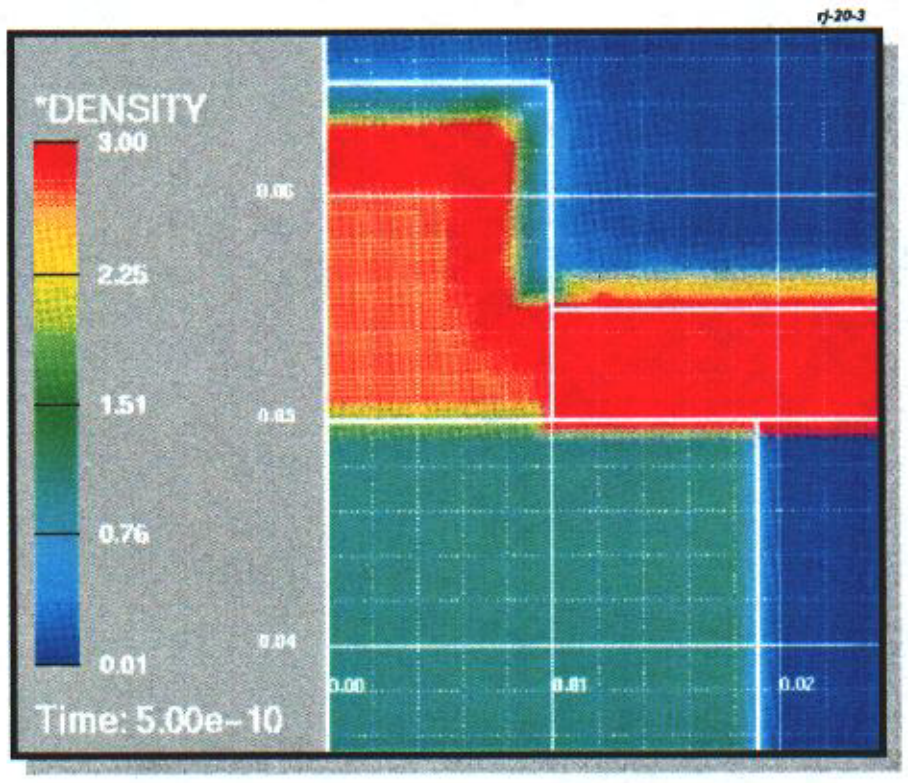

RadJet / Z:

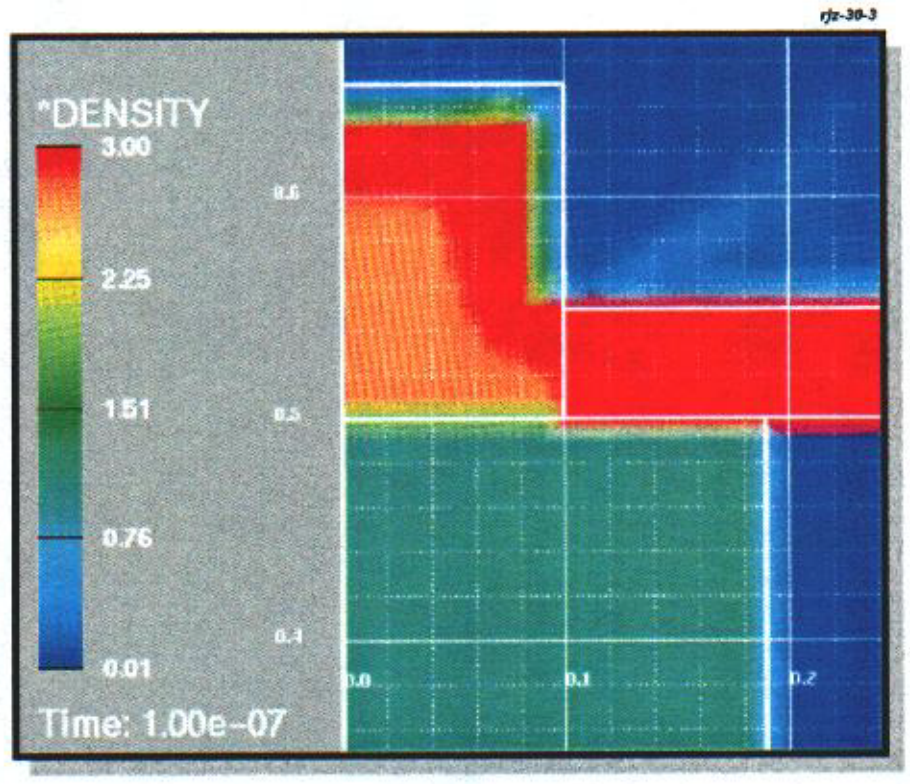

Dimensions in cm

Sandia National Laboratories

The RadJet problem at early times, at about the time of shock breakout . . .

RadJet / NOVA:

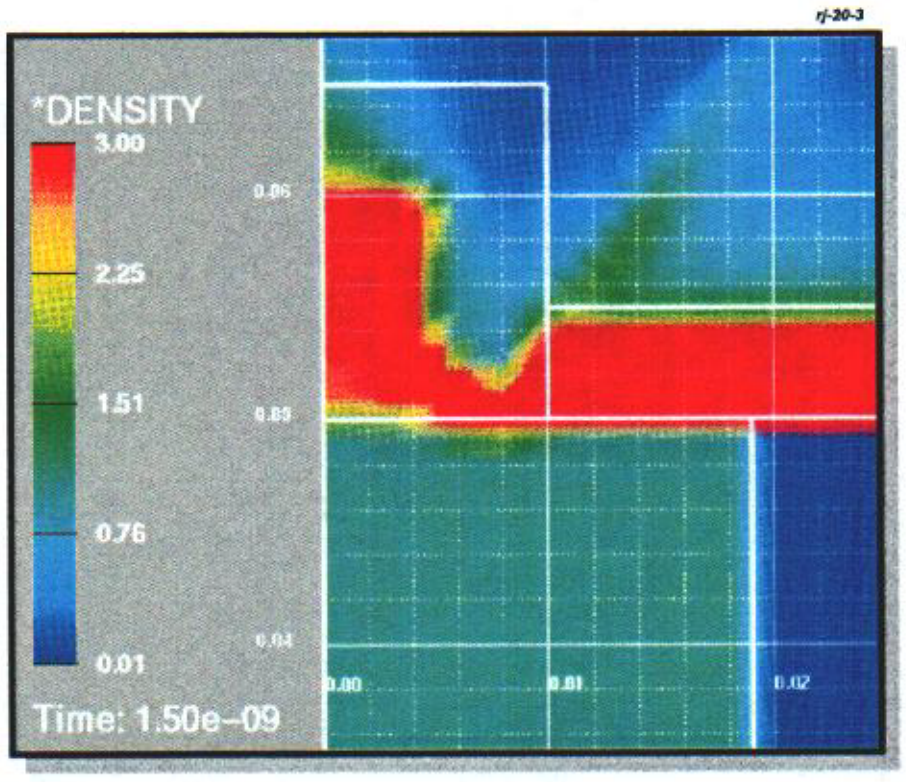

RadJet / Z:

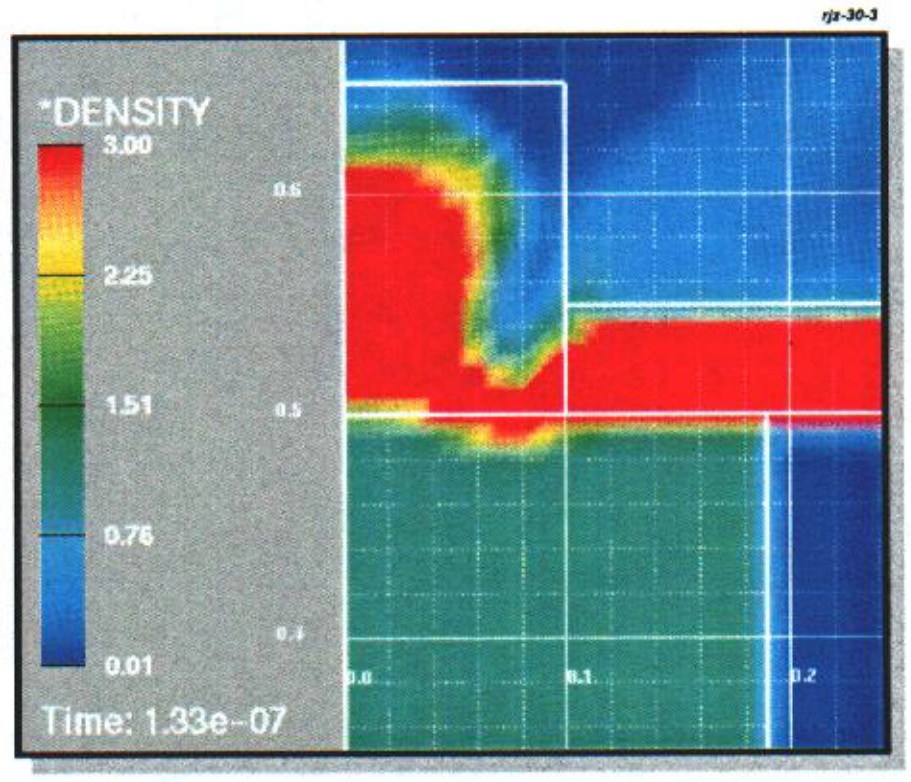

Dimensions in cm

Sandia National Laboratories

The RadJet problem at medium time, after the "jet" is relatively well formed . . .

RadJet / NOVA:

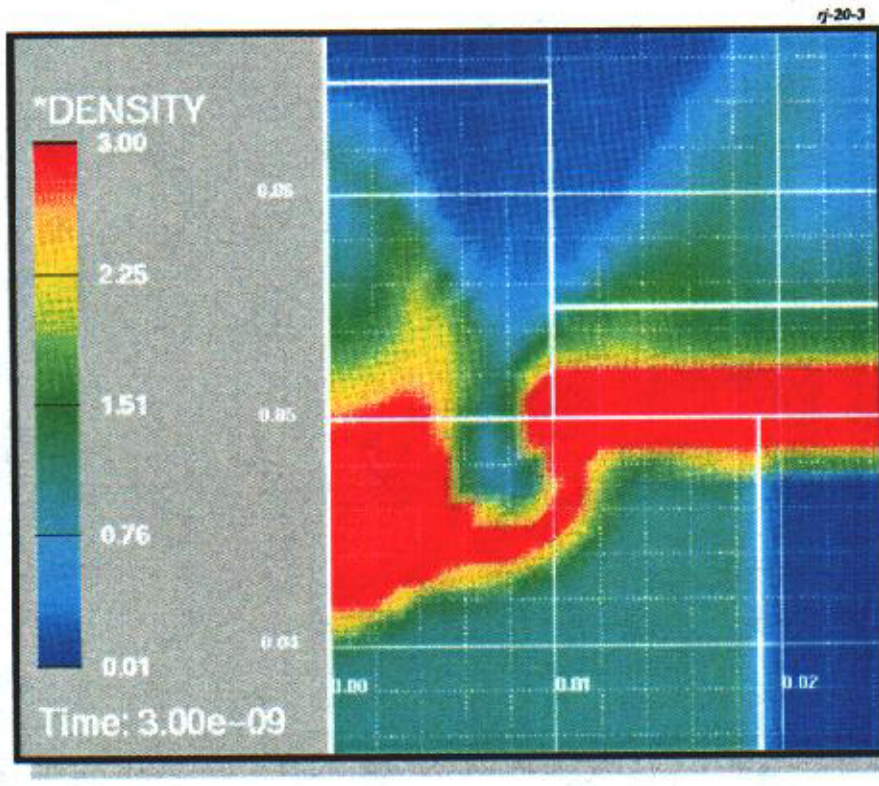

RadJet / Z:

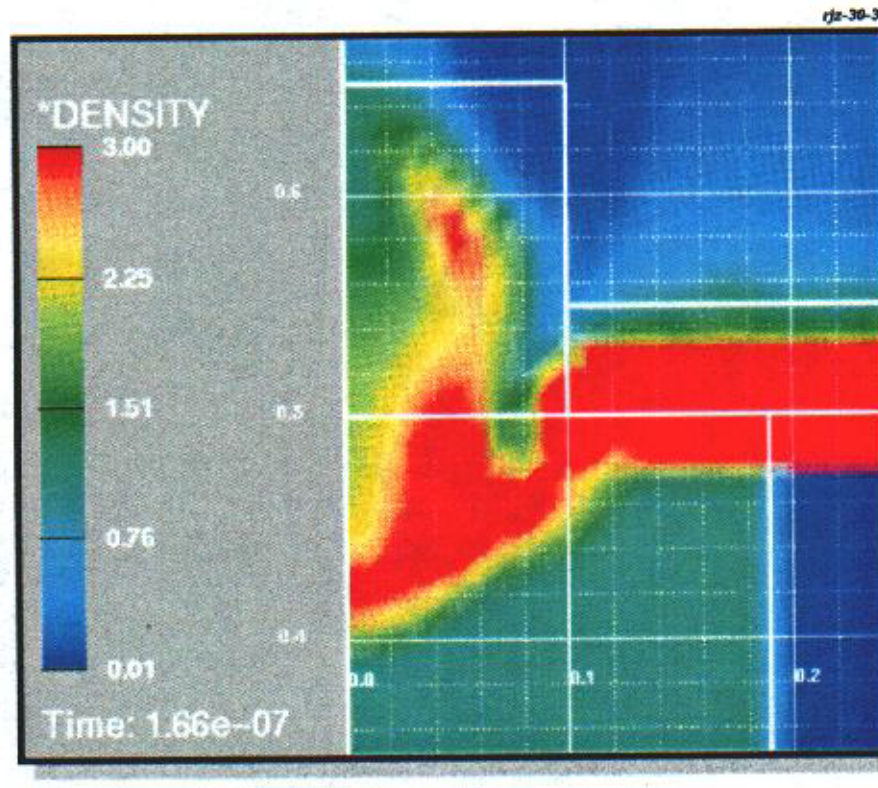

Dimensions in cm

Sandia National Laboratories

At later times the problems are still similar, and the jet is well into the polystyrene backing.

RadJet / NOVA:

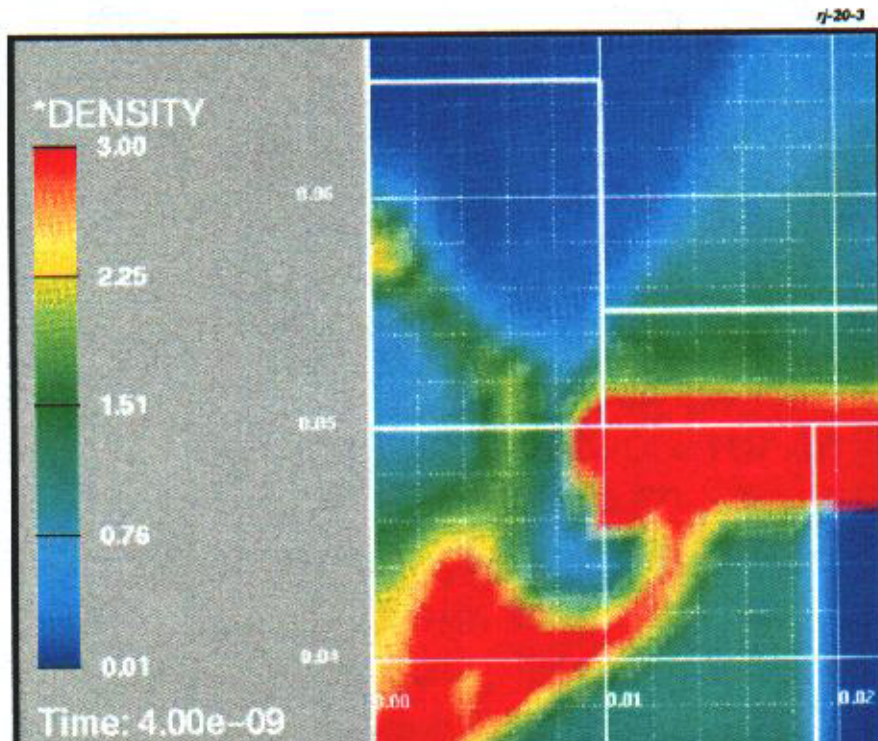

RadJet / Z:

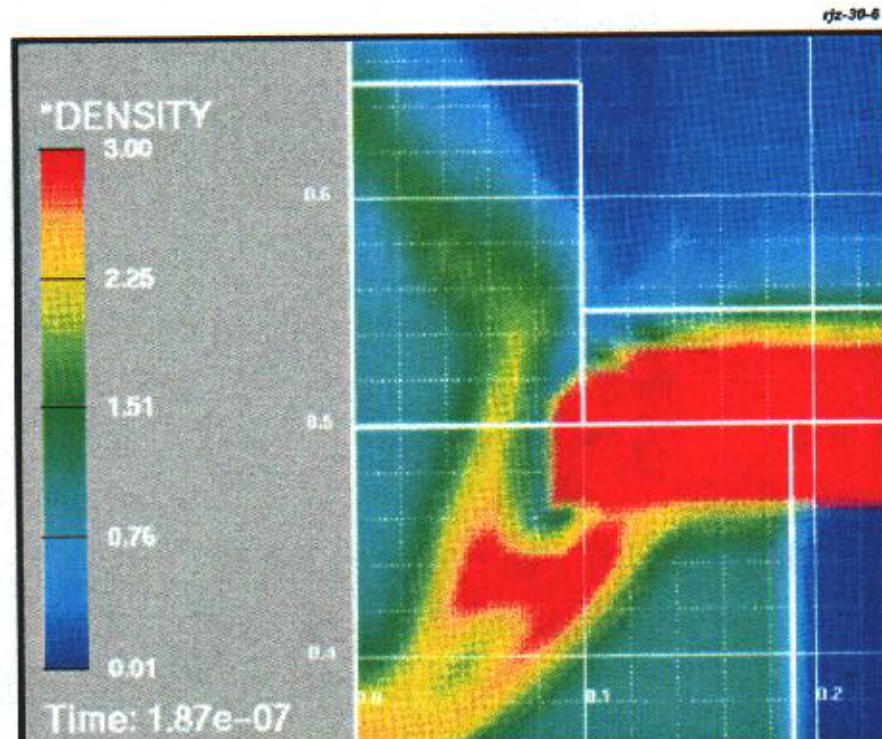

Dimensions in cm

Sandia National Laboratories

By late times, the differences due to lack of radiation "scaling" are considerably more evident.

RadJet / NOVA:

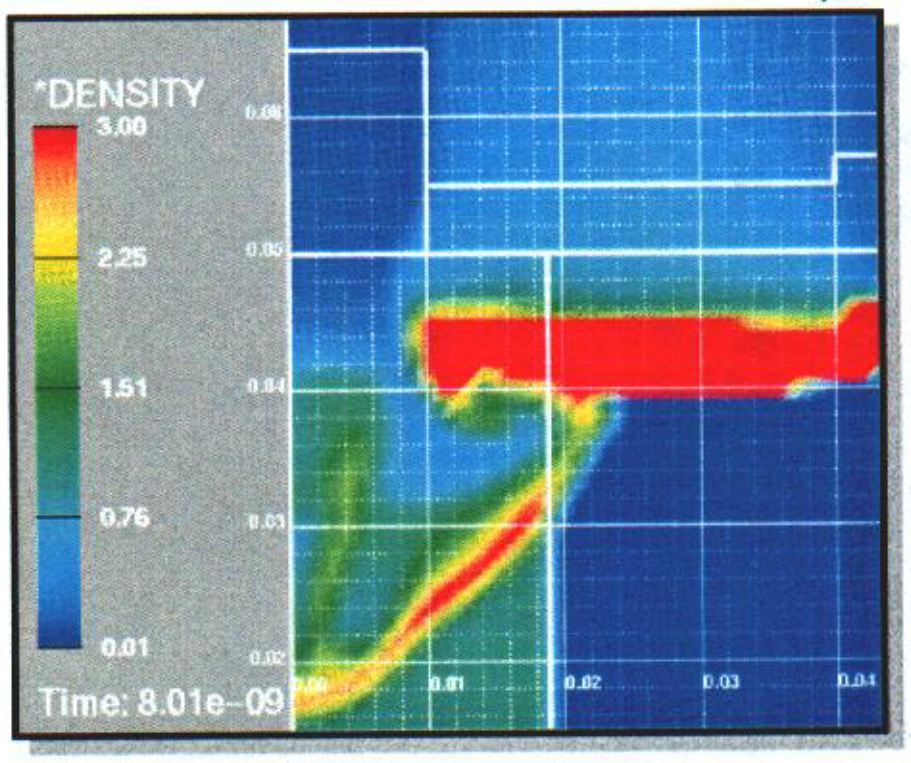

RadJet / Z:

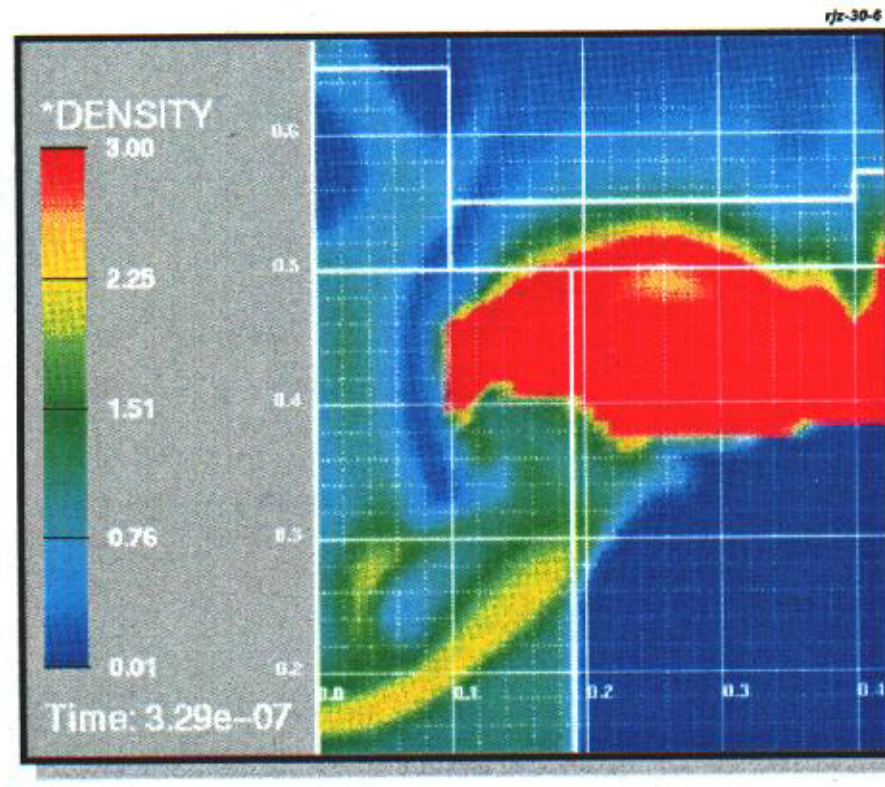

Dimensions in cm

Sandia National Laboratories

Temperatures and pressures show much larger differences than the densities.

RadJet / NOVA:

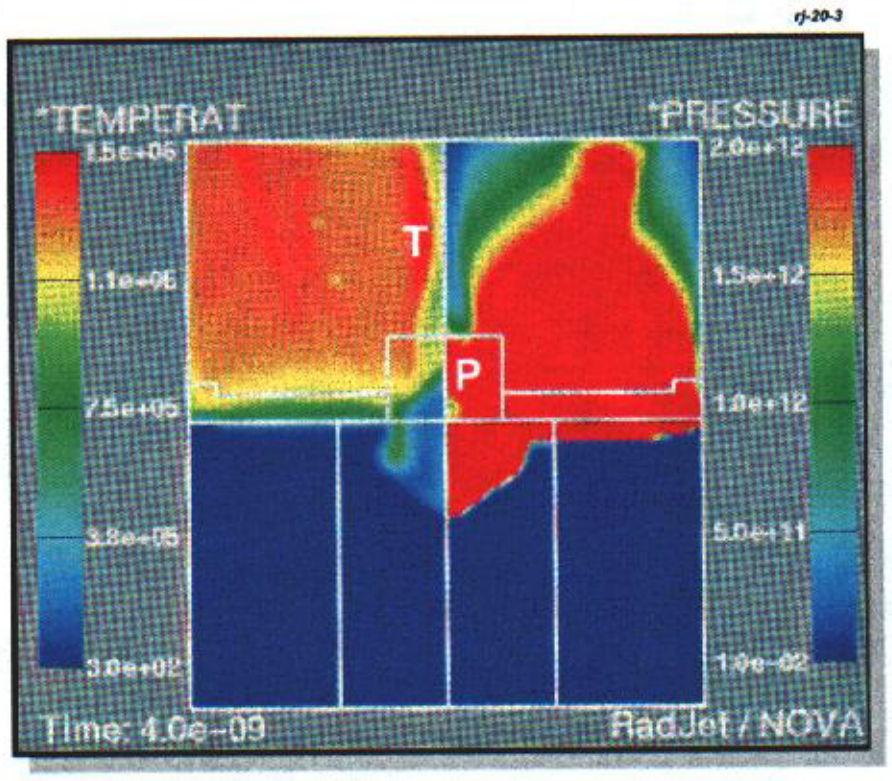

'T' -- $T_{max} \cong 130$ eV
'P' -- $P_{max} \cong 30$ Mb

RadJet / Z:

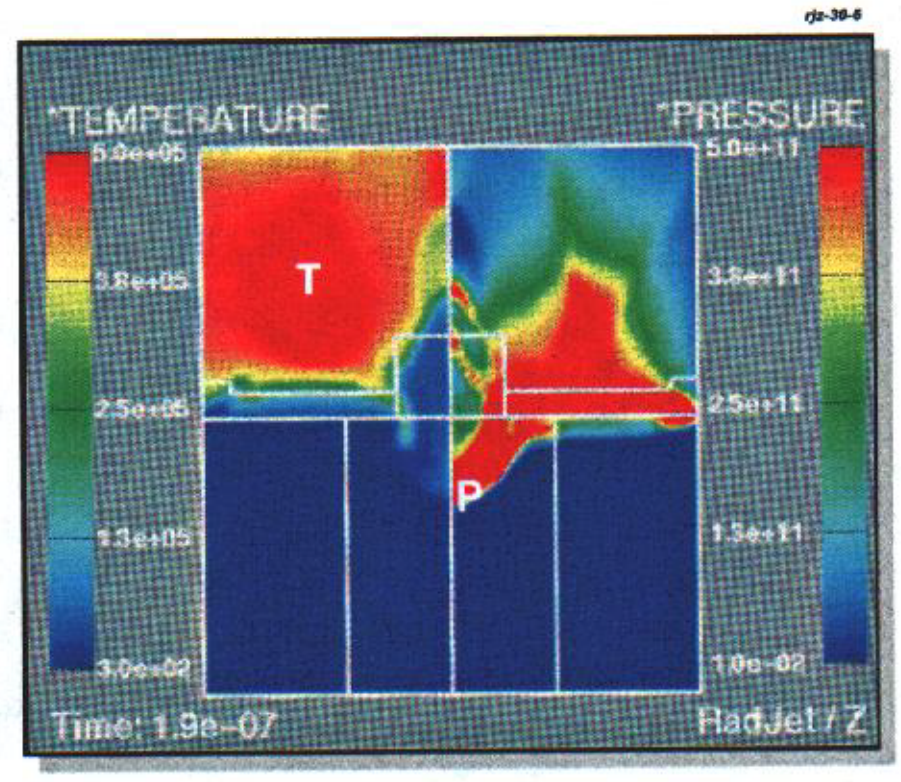

'T' -- $T_{max} \cong 50$ eV
'P' -- $P_{max} \cong 3$ Mb

Sandia National Laboratories

At much later times there are significant differences, but many qualitative features are similar.

RadJet / NOVA:

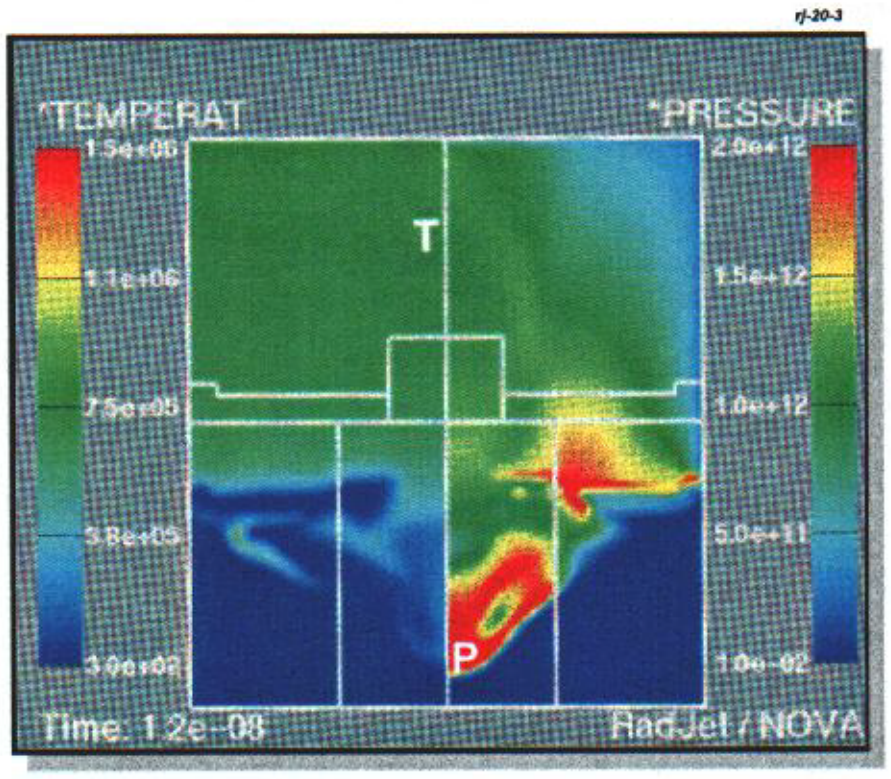

'T' -- $T_{max} \cong 70$ eV
'P' -- $P_{max} \cong 4$ Mb

RadJet / Z:

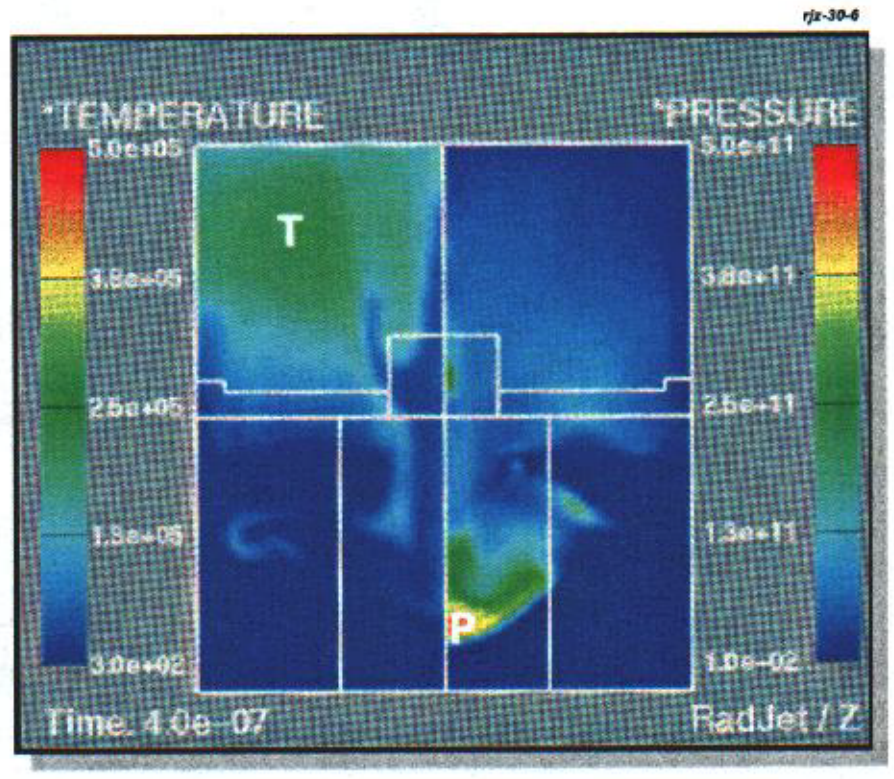

'T' -- $T_{max} \cong 20$ eV
'P' -- $P_{max} \cong 0.5$ Mb

Sandia National Laboratories

The Z-Beamlet Backlighter (ZBL) is scheduled to begin operation on Z in mid 2001.

- *Renovation of ZBL building began in March 1999, completed in early 2000.*
- *Front end activation was completed in February 2000.*
- *ZBL project completion anticipated in mid 2001.*

March 1999

March 2000

February 2001

Sandia National Laboratories

The ZBL will be an important new diagnostic tool for high-energy physics experiments on Z.

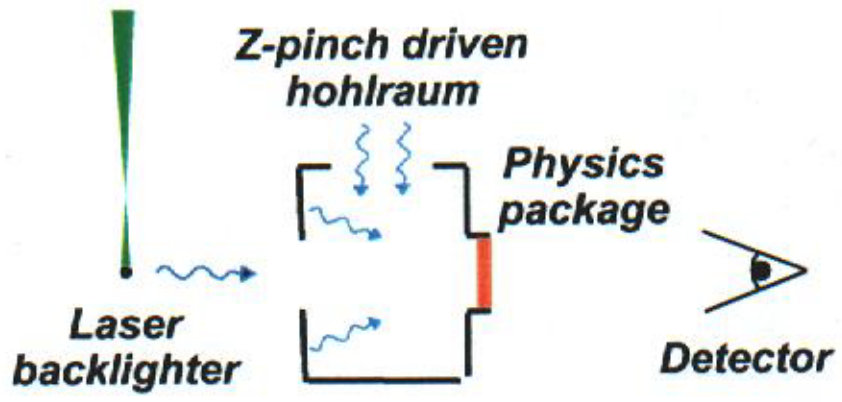

2 TW laser backlighter on Z --

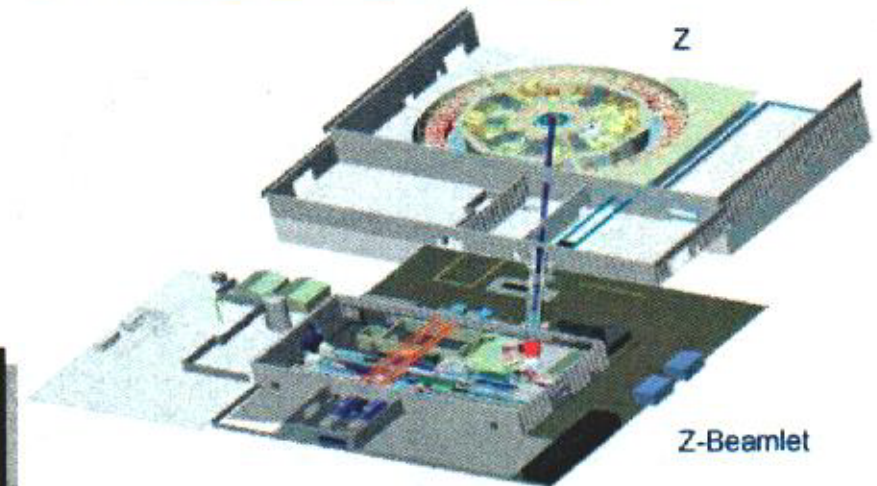

Measurements possible with a backlighter:

- Material T_e and n_e
- Magnetic Rayleigh-Taylor growth rate
- Absorption spectrum
- Capsule implosion symmetry
- Material interface motion
- Particle velocity and shock density
- Instability mix region

- Capabilities include both point projection and area backlighting.
- We will have spatial resolution of 25 µm at 9 keV x-ray probe energy.

Sandia National Laboratories

We are using SPECT3D to visualize data for the Z-Beamlet Backlighter (ZBL) on these experiments.

- *The amplitude of each cell represents the optical depth through the jet as a function of axial position (Y) and offset from the axis (X).*
- *Overall, ZBL performance depends on photon energy, conversion efficiency, and other issues.*
- *This plot is taken from the 100-µm resolution RadJet / Z calculation at a time of 330 ns.*
- *For this example the backlighter energy was chosen as 3 keV, but the jet is probably too thick to "see" through.*

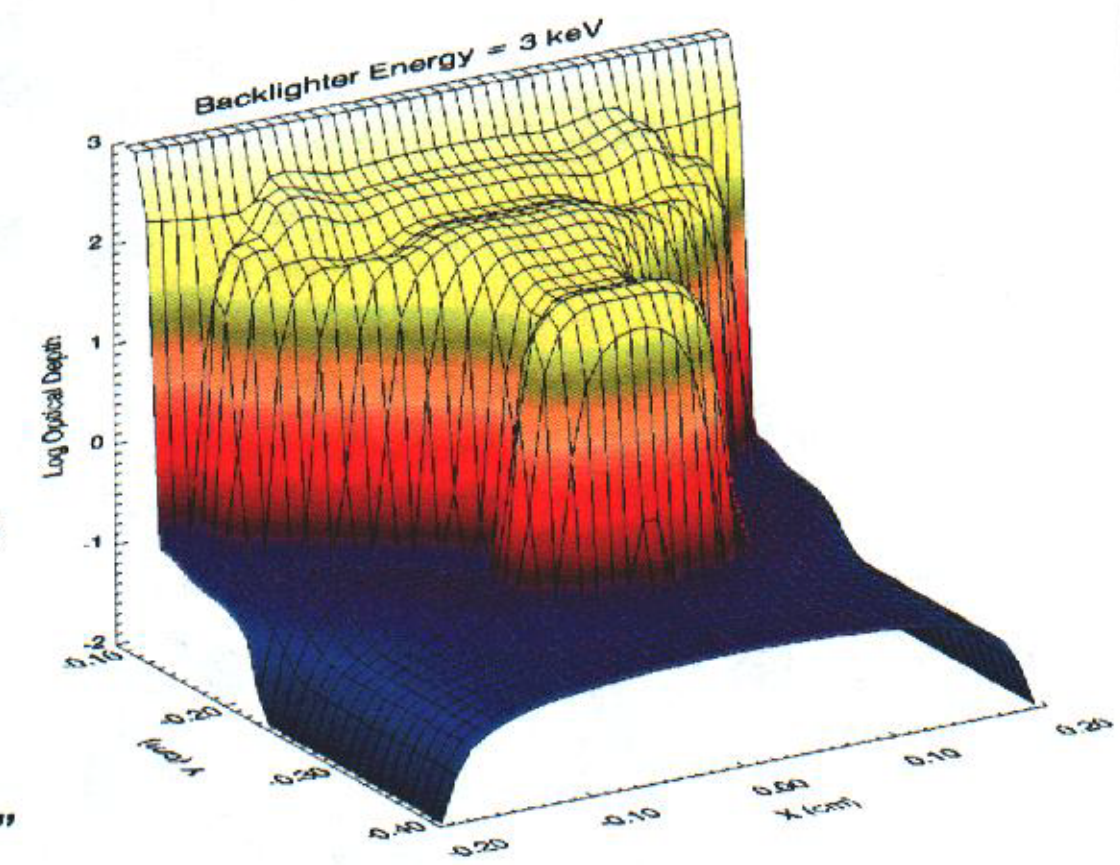

Sandia National Laboratories

At late times and 10 keV, we get optical depths of order unity, which implies experiment is feasible.

Backlighter photon energy:
hν = 10 keV

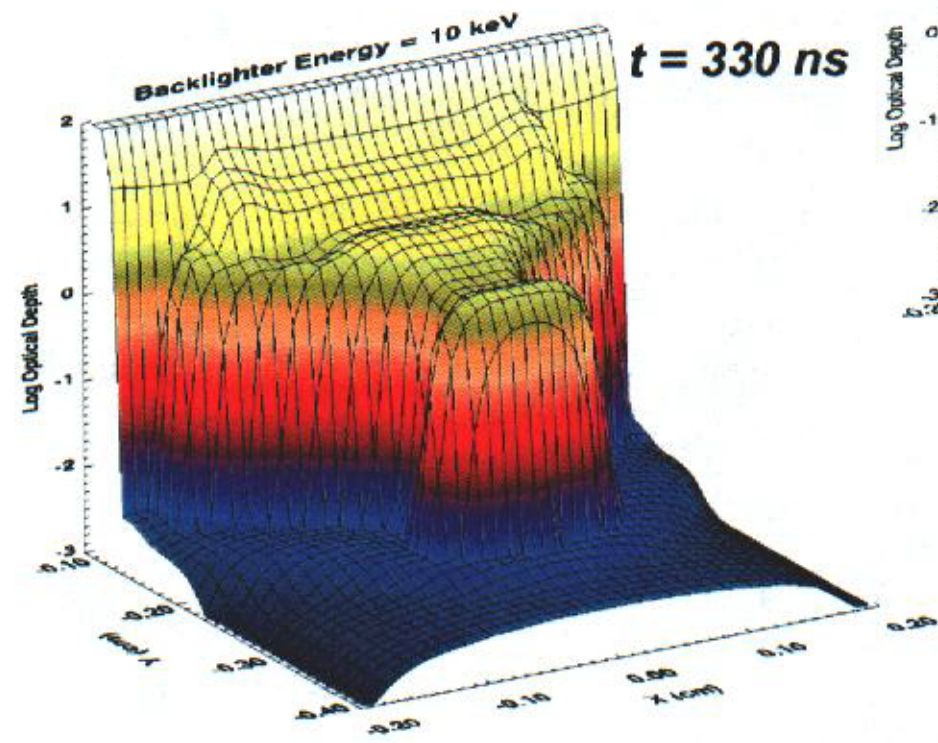

t = 330 ns

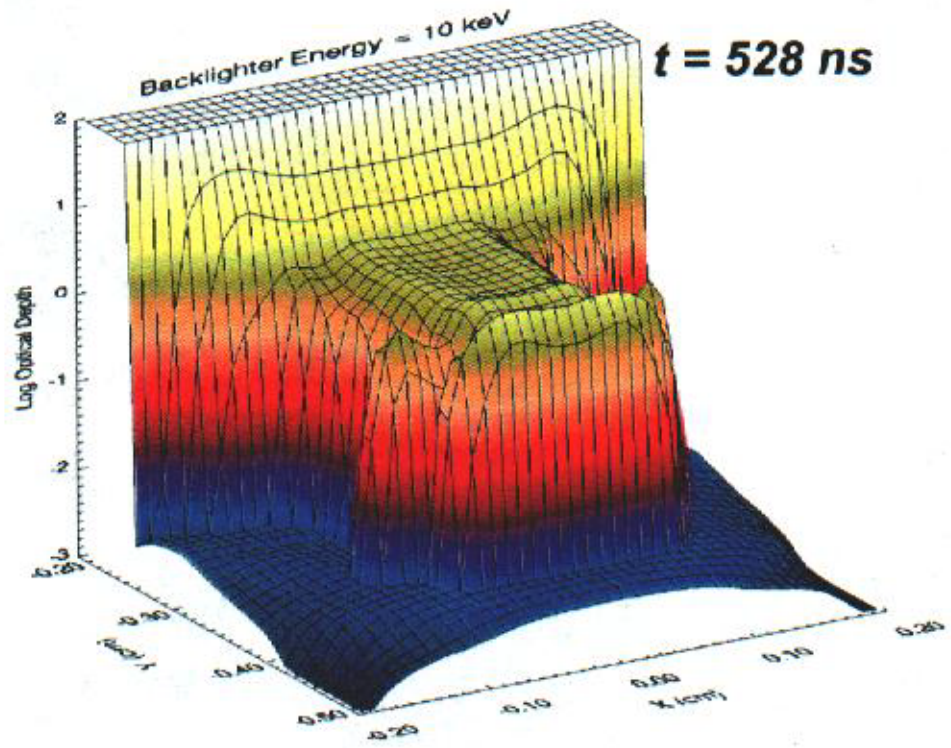

t = 528 ns

Sandia National Laboratories

Simulations of detector output from the scaled-up Z runs show all major features.

- ***These images were generated with hν = 10 keV.***
- ***Features evident in the radiographs include the polystyrene backing block, the shock wave in the polystyrene, and details of the aluminum jet in the plastic.***
- ***Details of the blowoff moving back into the hohlraum are also evident, but would not be recorded in the experimental radiograph.***



t = 330 ns

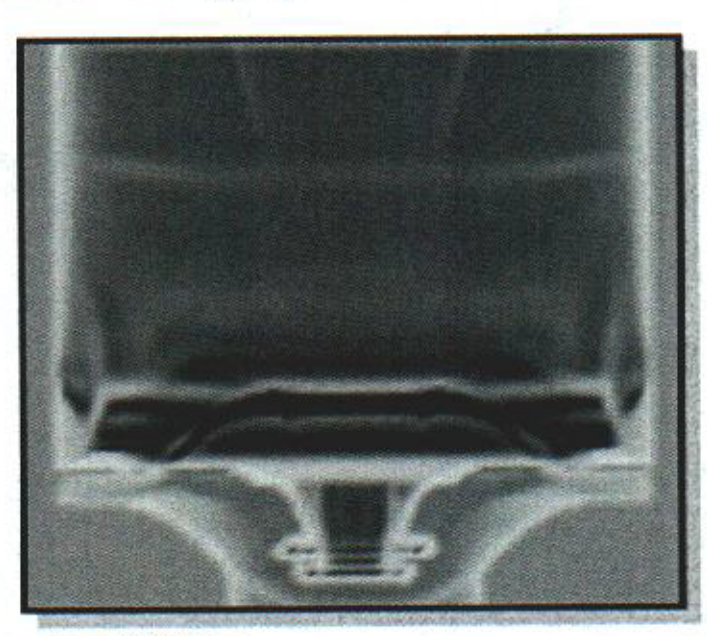

t = 528 ns

Sandia National Laboratories

We have studied the generation and evolution of radiation-driven jets on both NOVA and Z.

- The NOVA experiments, in conjunction with the other calculations, have provided validation for the ALEGRA modeling and analyses.
- In comparison with the results from NOVA, physical scaling-up of the configuration and using the Z-pinch machine produces similar, although not identical, phenomenology.
- Using the ZBL backlighter for diagnostic measurements appears to be feasible for the scaled-up configuration.
  - > At late times and for high photon energies, optical depths of order unity can be achieved.
- Next steps and other possibilities:
  - > Use finer zoning for ALEGRA calculations;
  - > Use more realistic and representative ZBL spectra;
  - > Modify Z source to obtain different conditions (*e.g.*, higher temperatures via dynamic hohlraum, multiple and/or colliding jets);
  - > Examine different configurations of interest, or other degrees of physical scale-up.

Sandia National Laboratories