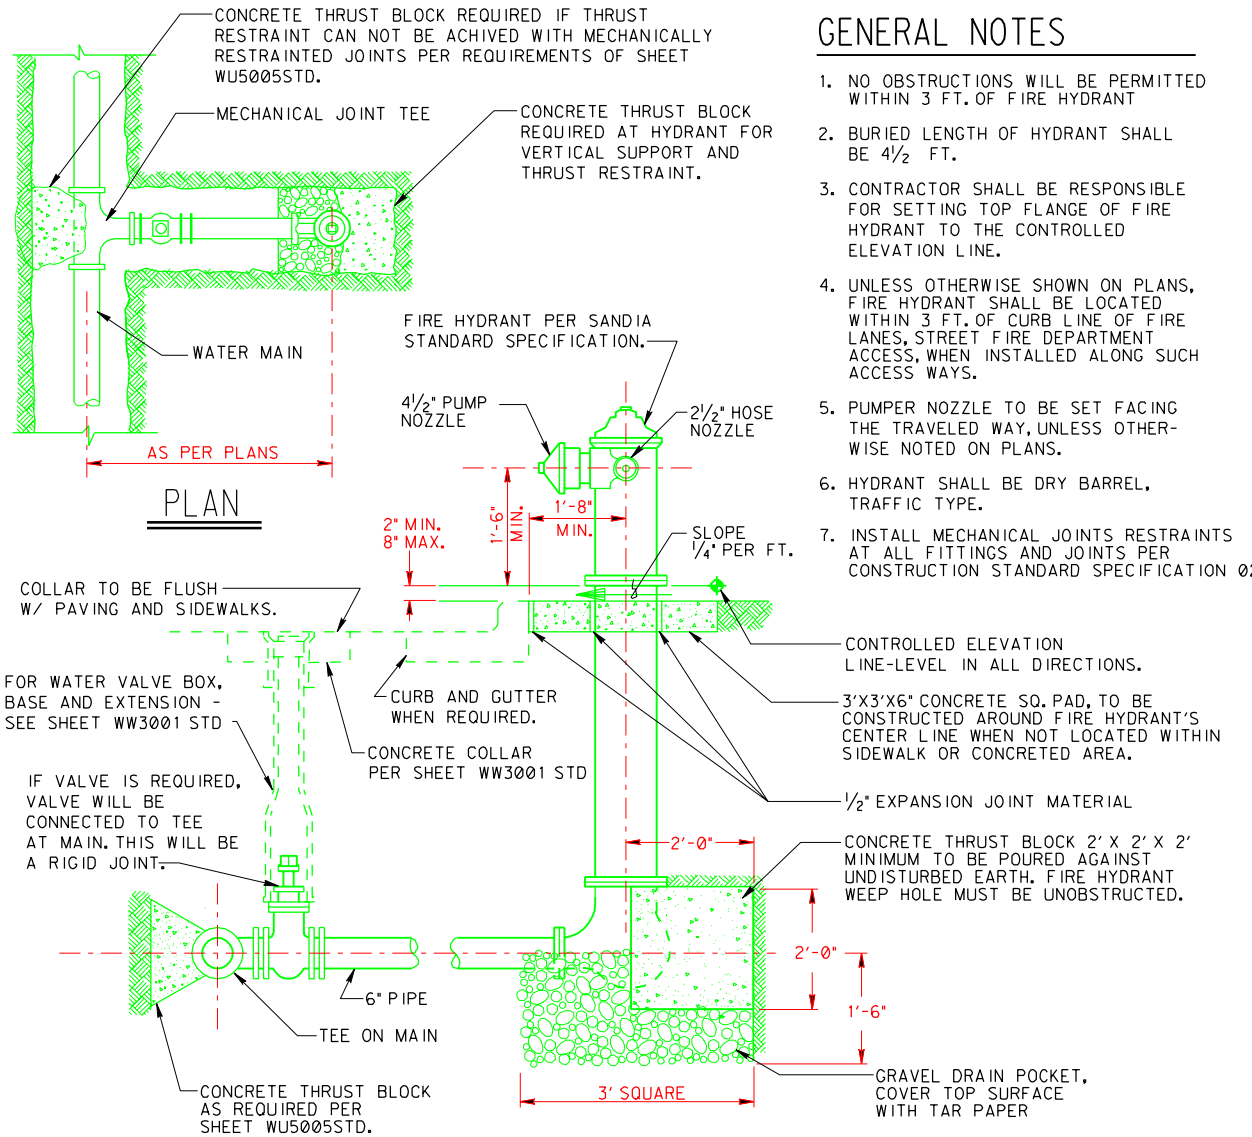

GENERAL NOTES

1. NO OBSTRUCTIONS WILL BE PERMITTED WITHIN 3 FT. OF FIRE HYDRANT
2. BURIED LENGTH OF HYDRANT SHALL BE 4½ FT.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR SETTING TOP FLANGE OF FIRE HYDRANT TO THE CONTROLLED ELEVATION LINE.
4. UNLESS OTHERWISE SHOWN ON PLANS, FIRE HYDRANT SHALL BE LOCATED WITHIN 3 FT. OF CURB LINE OF FIRE LANES, STREET FIRE DEPARTMENT ACCESS, WHEN INSTALLED ALONG SUCH ACCESS WAYS.
5. PUMPER NOZZLE TO BE SET FACING THE TRAVELED WAY, UNLESS OTHERWISE NOTED ON PLANS.
6. HYDRANT SHALL BE DRY BARREL, TRAFFIC TYPE.
7. INSTALL MECHANICAL JOINTS RESTRAINTS AT ALL FITTINGS AND JOINTS PER CONSTRUCTION STANDARD SPECIFICATION 02665.

DETAIL OF FIRE HYDRANT SETTING WITH BLOCKING

SCALE: NONE

PREPARED BY: E.S.M.
CHECKED BY: J.J.M.
DATE: 2-02-04
REV: C

SANDIA NATIONAL LABORATORIES
FACILITIES ENGINEERING

FIRE HYDRANT ASSEMBLY

DETAIL NO.: WW5001
SCALE: NONE

CIVIL
STDSIT.DGN

"Property of Sandia National Laboratories Facilities Management and Operation Center (FMOC).
No duplication or alteration allowed without the expressed permission and authorization of FMOC."