STRATEGIES FOR LIQUID ANODE ALKALI BATTERIES OF HIGH ENERGY DENSITY OPERATING AT 0 to 100ºC.

OFFICE OF ELECTRICITY DELIVERY & ENERGY RELIABILITY

C. Austen Angell* and Steve W. Martin#
*Dept. of Chemistry-Biochemistry, Arizona State University, Tempe, AZ 85287
Dept. of Materials Science, Iowa State University, Ames, IA 50011

ASU IOWA STATE

Purpose

- To develop a lower temperature, thermally cycle-able, Zebra cell (chosen by big corporations like GE, etc) for stationary large energy storage installations

•Strategies:

- **Anode**: Use Na-K alloy anode,
- **Separator**: Na-K alloy anode demands use of joint Na+/K+ conducting separator: **use β"-Al_2O_3.**
- **•Cathode contact electrolyte**: $NaAlCl_4$ freezes at 185ºC. Need low-melting non-volatile additives to produce ***"ionic oils"***. Best choices are ionic liquids like EMIM-$AlCl_4$.
- **•Cathode: $NiCl_2$ on Ni foam** (or a "red oil" Br_2, or sulfur)

Impact on DOE OE Energy Storage Mission

- **Enhanced operating flexibility enabled by non-solidifying cell chemistry, allowing battery shutdown**
- •Zebra cell ($Na/NiCl_2$) and Na/S cells with planar technology are robust.
- but.. Zebra cell and Na/S cell both are constrained to run at T>250ºC.
- Shut-down in each case is tedious, and dangerous to cell integrity.

- **Lower temp operation improves system efficiency**
- Systems running at low temperatures, such as the Zebra cell and Na/S cells we proposed, will have higher voltages and may include alkali halide types not yet evaluated,
- e.g. **Na-K**/$NaAlCl_4$-Na,K(XYZ)/**Br_2**"red oil"

Recent Results

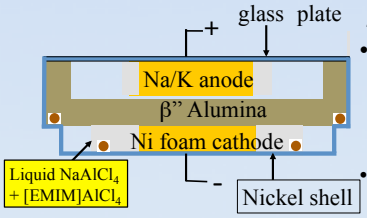

At ISU, we are commissioning a

- **New density-stable flat panel cell** with exchangeable electrolyte and solid state separator parts for testing the battery components,
- **Liquid alkali anode** contained inside β"-alumina/composite cup.

- **•Ionic liquid electrolyte** is contained in the bottom immersing nickel (uncharged state) cathode, liquid (sulfur complex or bromine red oil) cathode or $NiCl_2$ (Zebra version).
- **•Single ion conducting separator** β" Al_2O_3 (or novel Na boro-epoxide glasses or complex inorganic Na^+-conducting plastic crystal)
- •Powdered β" Al_2O_3, as base conductor, incorporated in Na^+ conducting $Na_2S + P_2S_5$ glasses at ISU, then heat treated at 380 ºC and 480 ºC

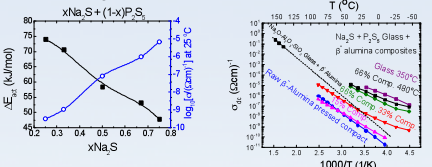

Figure 2. Na^+ ion conductivities of pure $Na_2S + P_2S_5$ glasses (left) and composites with Na β" Al_2O_3 consolidated at the indicated T (right) and compared to oxide glass - Na β" Al_2O_3 composites of much lower conductivity

Cathode electrolyte: Low-melting eutectics (at ASU)

1. Cells 2. Data **Fig. 3**

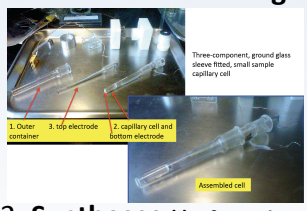

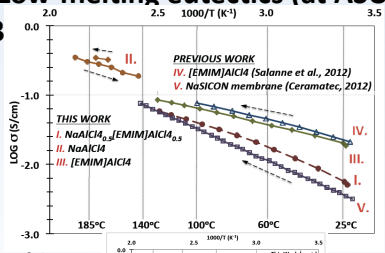

3. **Syntheses** **(i) of new low-melting *inorganic* salts: unsuccessful**

(ii) of novel inorganic Na^+-conducting plastic crystals, ***successful***



Figure 4

Research Plan

At ASU:

1. **Determine liquidus surfaces for systems of ionic liquids with (Na,K)$AlCl_4$** using DTA system for (preliminary studies) **(b)** and DSC for key cases.
2. **Determine viscosities** to compare with measured conductivities, and then use Walden plots to evaluate conductivity losses by alkali cation self-trapping suggested by results Figure 3.
3. **Develop all-inorganic plastic crystal alkali ion conductors** of Figure 4 as alternative (higher-conducting) electrolytes for **sodium-potassium-ambient-air storage** systems.

At ISU:

1. **Using commercial β" Al_2O_3 separators, homemade composite, and plastic crystal separators,** test the adjacent cell design with ambient liquid Na-K anode (see phase diagram), and liquid cathode (bromine for alkali-halide cell), or gas cathode (for Na/air cell).
2. **Develop liquid halogen and liquid sulfur**-type formulations for cathodes.
3. **Produce prototype energy storage cell,** using best combination of above cell components.

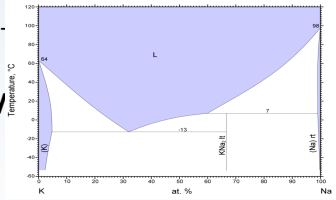

Na-K phase diagram showing ambient liquids, 13 to 72at.% sodium, (from ASM 90146).

Sandia National Laboratories

The authors gratefully acknowledge the support of the Department of Energy/Office of Electricity's Energy Storage Program. and the leadership of Imre Gyuk