




Accelerating modeling and simulation workflows via the Schwarz alternating method for multiscale coupling and contact









Irina Tezaur

Sandia National Laboratories, Livermore, CA, USA





Team & Acknowledgements (Over Almost 11 Years!)







J. Barnett



C. Wentland



C. Alleman



G. Phlipot



W. Snyder



T. Shelton



D. Koliesnikova



I. Moore



E. Parish



A. Gruber



B. Phung



C. Rodriguez



J. Hoy



M. Merewether



G. Sambataro











About Sandia National Laboratories

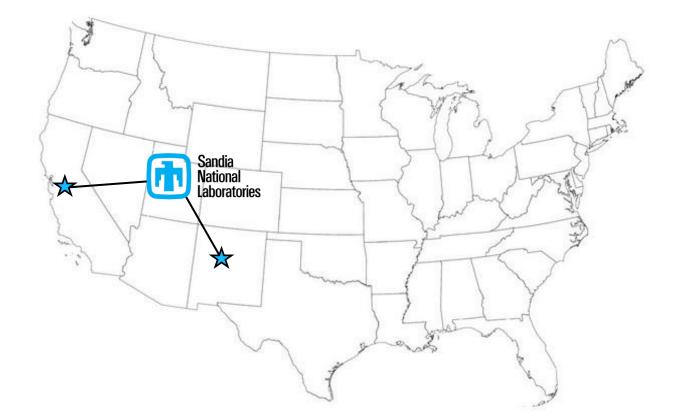





- Sandia is a multi-mission national lab aimed at advancing U.S. national security
- 1 of 3 U.S. Department of Energy's (DOE's) National Nuclear Security Administration (NNSA) R&D labs (along with Lawrence Livermore and Los Alamos)
- Two main sites (Albuquerque, NM and Livermore, CA), 17,000 staff scientists


- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



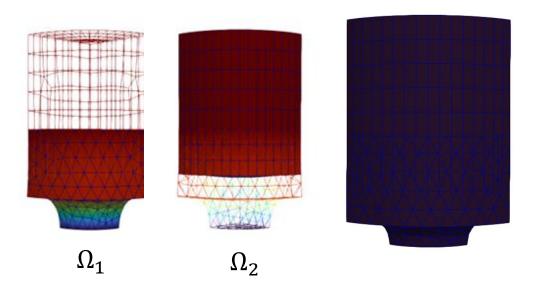


Contact boundaries Γ^1 and Γ^2






- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



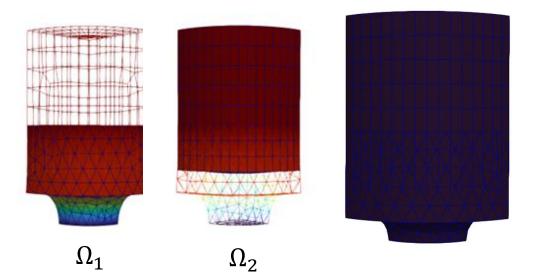







- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



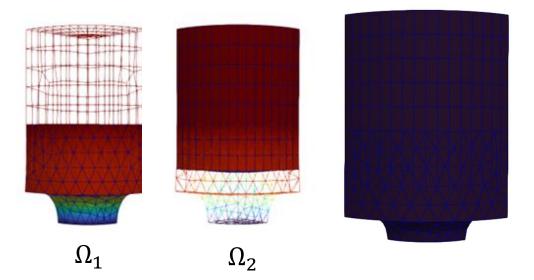





Motivation for Coupling in Solid Mechanics

Concurrent multiscale coupling for predicting failure

- Large scale structural failure frequently originates from small scale phenomena such as defects, microcracks, inhomogeneities and more, which grow quickly in unstable manner
- Failure occurs due to *tightly coupled interaction* between small scale (stress concentrations, material instabilities, cracks, etc.) and large scale (vibration, impact, high loads and other perturbations)
- Concurrent multiscale methods are essential for understanding and prediction of behavior of engineering systems when a small scale failure determines the performance of the entire system


Simplification of mesh generation

• Creating a *high-quality mesh* for a *single component* can take *weeks*, making it "the single biggest bottleneck in [mod/sim] analyses" [Sandia Lab News, 2020]!

<u>Goal</u>: develop a concurrent multiscale coupling method that is minimally-intrusive to implement into large HPC codes and can simplify the task of meshing complex geometries.




Roof failure of Boeing 737 aircraft due to fatigue cracks. From *imechanica.org*.

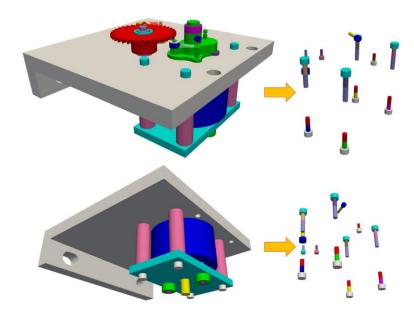

Schematic of difficult-to-mesh ratcheting mechanism with multiple threaded fasteners. From Parish *et al.*, 2024.


Requirements for Multiscale Coupling Method

- Coupling is concurrent (two-way)
- "Plug-and-play" framework: simplifies task of meshing complex geometries
 - ➤ Ability to couple regions with different non-conformal meshes, different element types and different levels of refinement
 - > Ability to use *different solvers/time-integrators* in different regions
- Ease of implementation into existing massively-parallel HPC codes
- Scalable, fast, robust (we target real engineering problems, e.g., analyses involving failure of bolted components!)
- Coupling does not introduce nonphysical artifacts
- *Theoretical* convergence properties/ guarantees

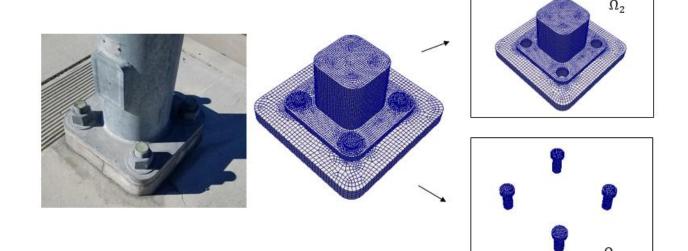

- ç
- Coupling is concurrent (two-way)

- A great method theoretically*
 may not make it if it is too
 difficult to implement in
 production codes.
- "Plug-and-play" framework: simplifies task of meshing complex geometries
 - > Ability to couple regions with different non-conformal meshes, different element types and different levels of refinement
 - > Ability to use *different solvers/time-integrators* in different regions
- Ease of implementation into existing massively-parallel HPC codes
- **Scalable, fast, robust** (we target **real** engineering problems, e.g., analyses involving failure of bolted components!)
- Coupling does not introduce nonphysical artifacts
- *Theoretical* convergence properties/ guarantees

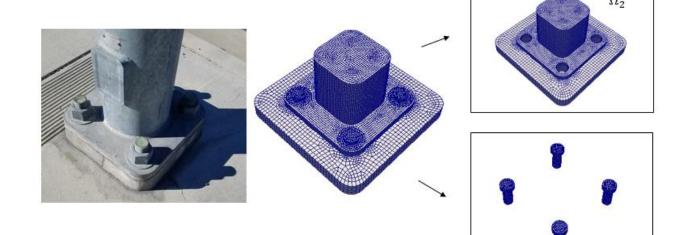

^{*} W. Sun, A. Mota. "A multiscale overlapped coupling formulation for large-deformation strain localization", Comp. Mech. 2014.


Requirements for Multiscale Coupling Method





Our customers are most excited about the Schwarz method's potential to simplify meshing.

- Coupling is concurrent (two-way)
- "Plug-and-play" framework: simplifies task of meshing complex geometries
 - > Ability to couple regions with different non-conformal meshes, different element types and different levels of refinement
 - > Ability to use *different solvers/time-integrators* in different regions
- Ease of implementation into existing massively-parallel HPC codes
- Scalable, fast, robust (we target real engineering problems, e.g., analyses involving failure of bolted components!)
- Coupling does not introduce nonphysical artifacts
- Theoretical convergence properties/ guarantees










11


Outline

- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



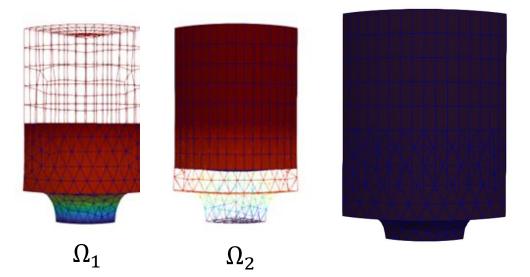








Schwarz Alternating Method for Domain Decomposition (DD)

Proposed in 1870 by H. Schwarz for solving Laplace PDE on irregular domains.

Crux of Method: if the solution is known in regularly shaped domains, use those as pieces to iteratively build a solution for the more complex domain.



H. Schwarz (1843-1921)


Basic Schwarz Algorithm

Initialize:

• Solve PDE by any method on Ω_1 w/ initial guess for transmission boundary conditions (BCs) on Γ_1 .

Iterate until convergence:

- Solve PDE by any method in Ω_2 w/ BCs on Γ_2 from just-obtained Ω_1 solution.
- Solve PDE by any method in Ω_1 w/ BCs on Γ_1 from just-obtained Ω_2 solution.
- Schwarz alternating method most commonly used as a *preconditioner* for Krylov iterative methods to solve linear algebraic equations.



<u>Idea behind this work:</u> using the Schwarz alternating method as a *discretization* method for solving multiscale or multiphysics partial differential equations (PDEs).

Quasistatic Solid Mechanics Formulation

Laser weld

Energy functional defining weak form of the governing PDEs


$$\Phi[\boldsymbol{\varphi}] \coloneqq \int_{\Omega} A(\boldsymbol{F}, \boldsymbol{Z}) dV - \int_{\Omega} \rho \boldsymbol{B} \cdot \boldsymbol{\varphi} dV$$



 $ightharpoonup F:=\nabla \varphi$: deformation gradient

> Z: collection of internal variables (for plastic materials)


 $\triangleright \rho$: density, **B**: body force, $P = \partial A/\partial F$: Piola-Kirchhoff stress




• Quasistatics solves sequence of problems in which loading (body force) B is incremented quasistatically w.r.t. pseudo time t_i :


For
$$i=1,...,n$$

Solve Div $P+\rho B(t_i)=\mathbf{0}$ with appropriate boundary conditions (BCs)
Increment pseudo time t_i to obtain t_{i+1}





Pressure vessel




Spatial Coupling via (Multiplicative) Alternating Schwarz

冊

Overlapping Domain Decomposition

$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{1}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} \text{, in } \Omega_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{1} \backslash \Gamma_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\varphi}_{2}^{(n)} & \text{on } \Gamma_{2} \end{cases}$$
$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{2}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} \text{, in } \Omega_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{2} \backslash \Gamma_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\varphi}_{1}^{(n+1)} & \text{on } \Gamma_{2} \end{cases}$$

Easier implementation and faster convergence



Model PDE:

$$\begin{cases} \operatorname{Div} \boldsymbol{P} + \rho \boldsymbol{B} = \boldsymbol{0} \text{ , in } \Omega \\ \boldsymbol{\varphi} = \boldsymbol{\chi}, & \text{on } \partial \Omega \end{cases}$$

 Dirichlet-Dirichlet transmission BCs [Schwarz, 1870; Lions, 1988]


Non-overlapping Domain Decomposition

$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{1}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} , & \operatorname{in} \Omega_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\chi}, & \operatorname{on} \partial \Omega_{1} \backslash \Gamma \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\lambda}_{n+1} & \operatorname{on} \Gamma \end{cases}$$

$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{2}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} , & \operatorname{in} \Omega_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\chi}, & \operatorname{on} \partial \Omega_{2} \backslash \Gamma \\ \boldsymbol{P}_{2}^{(n+1)} \boldsymbol{n} = \boldsymbol{P}_{1}^{(n+1)} \boldsymbol{n}, & \operatorname{on} \Gamma \end{cases}$$

$$\boldsymbol{\lambda}_{n+1} = \theta \boldsymbol{\varphi}_{2}^{(n)} + (1 - \theta) \boldsymbol{\lambda}_{n}, & \operatorname{on} \Gamma, & \operatorname{for} n \geq 1 \end{cases}$$

More flexible but slower to converge



Dirichlet-Neumann
variant preferred since
BCs are readily
available in SM codes

- Relevant for multi-material and multi-physics coupling
- Alternating Dirichlet-Neumann transmission BCs [Zanolli et al., 1987]
- Robin-Robin transmission BCs also lead to convergence [Lions, 1990]
- $\theta \in [0,1]$: relaxation parameter (can help convergence)

Additional Parallelism via Additive Schwarz



This talk

Multiplicative Overlapping Schwarz

$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{1}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} , \text{ in } \Omega_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{1} \backslash \Gamma_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\varphi}_{2}^{(n)} & \text{on } \Gamma_{2} \end{cases}$$
$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{2}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} , \text{ in } \Omega_{2} \end{cases}$$


$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{2}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} , & \operatorname{in} \Omega_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\chi}, & \operatorname{on} \partial \Omega_{2} \backslash \Gamma_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\varphi}_{1}^{(n+1)} & \operatorname{on} \Gamma_{2} \end{cases}$$

Additive Overlapping Schwarz

$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{1}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} \text{ , in } \Omega_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{1} \backslash \Gamma_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\varphi}_{2}^{(n)} & \text{on } \Gamma_{2} \end{cases}$$
$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{2}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} \text{ , in } \Omega_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{2} \backslash \Gamma_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\varphi}_{1}^{(n)} & \text{on } \Gamma_{2} \end{cases}$$


Model PDE:

$$\begin{cases} \operatorname{Div} \boldsymbol{P} + \rho \boldsymbol{B} = \boldsymbol{0} \text{ , in } \Omega \\ \boldsymbol{\varphi} = \boldsymbol{\chi}, & \text{on } \partial \Omega \end{cases}$$



- Multiplicative Schwarz: solves subdomain problems sequentially (in serial)
- **Additive Schwarz:** advance subdomains in **parallel**, communicate boundary condition data later
 - > Typically requires a few more **Schwarz iterations**, but does not degrade **accuracy**
 - > Parallelism helps balance additional cost due to Schwarz iterations
 - > Applicable to both **overlapping** and **non-overlapping** Schwarz

Overlapping Schwarz Coupling in Quasistatics

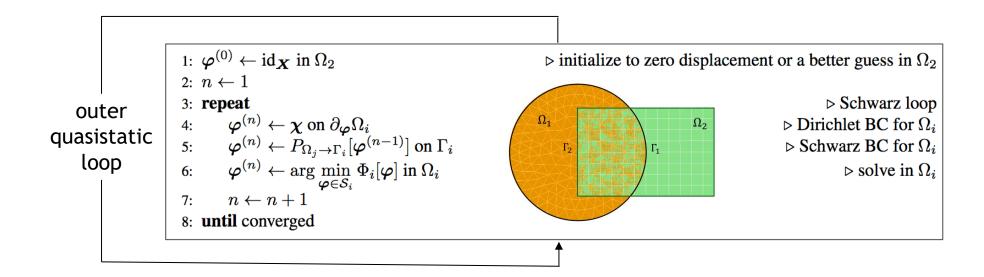

Advantages:

- Conceptually very simple.
- Allows the coupling of regions with different non-conforming meshes, different element types, and different levels of refinement.
- Information is exchanged among two or more regions, making coupling concurrent.
- Different solvers can be used for the different regions.
- Different material models can be coupled if they are compatible in the overlap region.
- Simplifies the task of meshing complex geometries for the different scales.

Solid Dynamics Formulation

$$T(\dot{\boldsymbol{\varphi}}) \coloneqq \frac{1}{2} \int_{\Omega} \rho \dot{\boldsymbol{\varphi}} \cdot \dot{\boldsymbol{\varphi}} \ dV$$

$$V(\boldsymbol{\varphi}) \coloneqq \int_{\Omega} A(\boldsymbol{F}, \boldsymbol{Z}) dV - \int_{\Omega} \rho \boldsymbol{B} \cdot \boldsymbol{\varphi} dV$$

$$L(\boldsymbol{\varphi}, \dot{\boldsymbol{\varphi}}) \coloneqq T(\dot{\boldsymbol{\varphi}}) - V(\boldsymbol{\varphi})$$

$$S[\boldsymbol{\varphi}] \coloneqq \int_{I} L(\boldsymbol{\varphi}, \dot{\boldsymbol{\varphi}}) dt$$

Euler-Lagrange equations:


$$\begin{cases} \operatorname{Div} \mathbf{P} + \rho \mathbf{B} = \rho \ddot{\boldsymbol{\varphi}}, & \operatorname{in} \Omega \times I \\ \boldsymbol{\varphi}(\mathbf{X}, t_0) = \boldsymbol{x}_0, & \operatorname{in} \Omega \\ \dot{\boldsymbol{\varphi}}(\mathbf{X}, t_0) = \boldsymbol{v}_0, & \operatorname{in} \Omega \\ \boldsymbol{\varphi}(\mathbf{X}, t) = \boldsymbol{\chi}, & \operatorname{on} \partial \Omega \times I \end{cases}$$

Semi-discrete problem following FEM discretization in space:


$$M\ddot{u} + f_{\text{int}}(u) = f_{\text{ext}}$$

Large-deformation vibration of a soft rubber ball



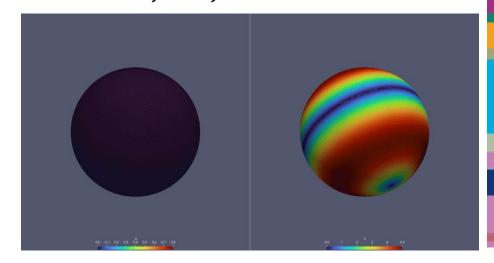

Flexible bracket




How to Apply Schwarz to Dynamics?

• In the literature the Schwarz method is applied to dynamics by using *space-time discretizations*.


Pro : Can use *non-matching* meshes and time-steps (see right figure).

Con ②: *Unfeasible* given the design of our current codes and size of simulations.

Ease of implementation is a very important requirement!

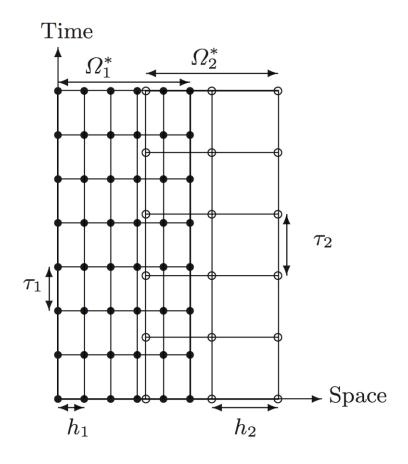

Overlapping non-matching meshes and time steps in dynamics.

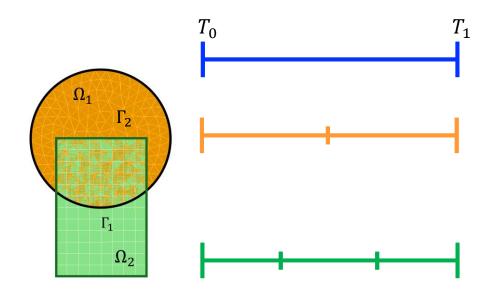

Step 0: Initialize i = 0 (controller time index).


Controller time stepper

Time integrator in Ω_1

Time integrator in Ω_2

Model PDE:
$$\begin{cases} M\ddot{u} + f_{int}(u, \dot{u}) = f_{ext} \\ u(x, 0) = u_0 \end{cases}$$



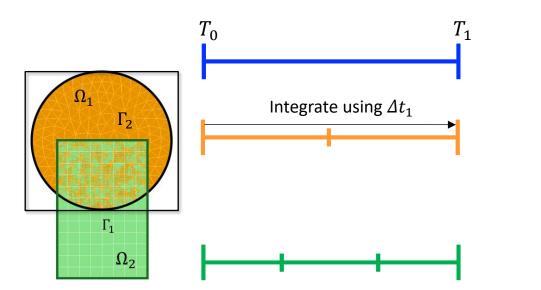

Controller time stepper

Time integrator in Ω_1


Time integrator in Ω_2

Step 0: Initialize i = 0 (controller time index).

<u>Step 1</u>: Advance Ω_1 solution from time T_i to time T_{i+1} using time-stepper in Ω_1 with time-step Δt_1 , using solution in Ω_2 interpolated to Γ_1 at times $T_i + n\Delta t_1$.

Model PDE:
$$\begin{cases} M\ddot{u} + f_{\text{int}}(u, \dot{u}) = f_{\text{ext}} \\ u(x, 0) = u_0 \end{cases}$$



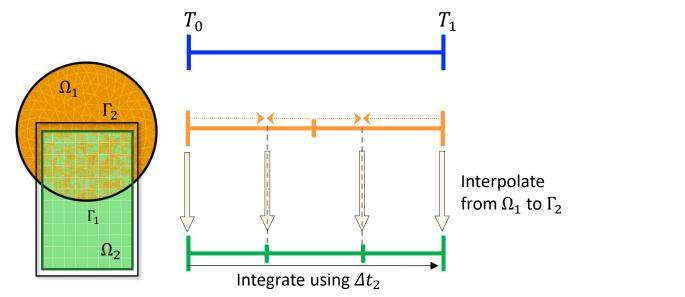

Controller time stepper

Time integrator in Ω_1

Time integrator in Ω_2


Step 0: Initialize i = 0 (controller time index).

<u>Step 1</u>: Advance Ω_1 solution from time T_i to time T_{i+1} using time-stepper in Ω_1 with time-step Δt_1 , using solution in Ω_2 interpolated to Γ_1 at times $T_i + n\Delta t_1$.

Step 2: Advance Ω_2 solution from time T_i to time T_{i+1} using time-stepper in Ω_2 with time-step Δt_2 , using solution in Ω_1 interpolated to Γ_2 at times $T_i + n\Delta t_2$.

.

Model PDE:
$$\begin{cases} M\ddot{u} + f_{\text{int}}(u, \dot{u}) = f_{\text{ext}} \\ u(x, 0) = u_0 \end{cases}$$

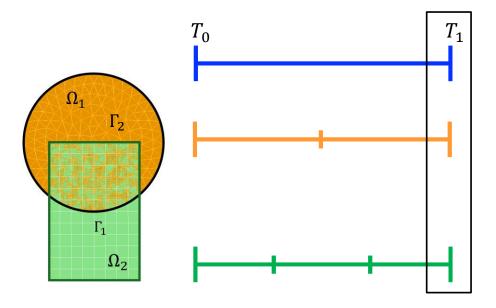

Controller time stepper

Time integrator in Ω_1

Time integrator in Ω_2

Step 0: Initialize i = 0 (controller time index).


Step 1: Advance Ω_1 solution from time T_i to time T_{i+1} using time-stepper in Ω_1 with time-step Δt_1 , using solution in Ω_2 interpolated to Γ_1 at times $T_i + n\Delta t_1$.

Step 2: Advance Ω_2 solution from time T_i to time T_{i+1} using time-stepper in Ω_2 with time-step Δt_2 , using solution in Ω_1 interpolated to Γ_2 at times $T_i + n\Delta t_2$.

Step 3: Check for convergence at time T_{i+1} .

Model PDE:
$$\begin{cases} M\ddot{u} + f_{int}(u, \dot{u}) = f_{ext} \\ u(x, 0) = u_0 \end{cases}$$



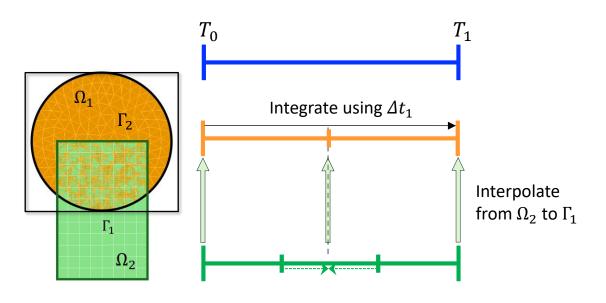

Controller time stepper

Time integrator in Ω_1

Time integrator in Ω_2

Step 0: Initialize i = 0 (controller time index).

<u>Step 1</u>: Advance Ω_1 solution from time T_i to time T_{i+1} using time-stepper in Ω_1 with time-step Δt_1 , using solution in Ω_2 interpolated to Γ_1 at times $T_i + n\Delta t_1$.


<u>Step 2</u>: Advance Ω_2 solution from time T_i to time T_{i+1} using time-stepper in Ω_2 with time-step Δt_2 , using solution in Ω_1 interpolated to Γ_2 at times $T_i + n\Delta t_2$.


Step 3: Check for convergence at time T_{i+1} .

• If unconverged, return to Step 1.

Model PDE:
$$\begin{cases} M\ddot{u} + f_{int}(u, \dot{u}) = f_{ext} \\ u(x, 0) = u_0 \end{cases}$$





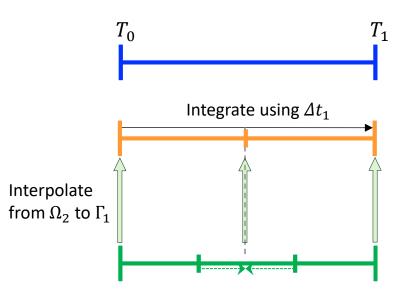

Controller time stepper

Time integrator in Ω_1

Time integrator in Ω_2

Can use different integrators with different time steps within each domain!

Time-stepping procedure is *equivalent* to doing Schwarz on *space-time domain* [Mota, IT, *et al.* 2022].

Step 0: Initialize i = 0 (controller time index).

<u>Step 1</u>: Advance Ω_1 solution from time T_i to time T_{i+1} using time-stepper in Ω_1 with time-step Δt_1 , using solution in Ω_2 interpolated to Γ_1 at times $T_i + n\Delta t_1$.

<u>Step 2</u>: Advance Ω_2 solution from time T_i to time T_{i+1} using time-stepper in Ω_2 with time-step Δt_2 , using solution in Ω_1 interpolated to Γ_2 at times $T_i + n\Delta t_2$.

Step 3: Check for convergence at time T_{i+1} .


- If unconverged, return to Step 1.
- If converged, set i = i + 1 and return to Step 1.


Model PDE: $\begin{cases} M\ddot{u} + f_{\text{int}}(u, \dot{u}) = f_{\text{ext}} \\ u(x, 0) = u_0 \end{cases}$

1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics

- Motivation & Background
- Formulation
- Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



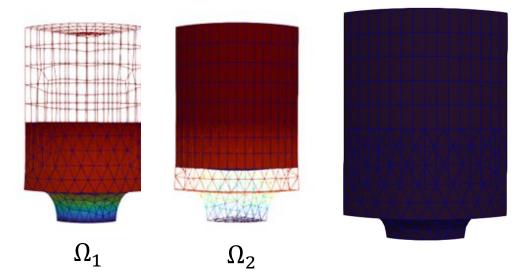






From Prototyping to Production: Our Software Implementations of SAM







Norma.jl is a Julia-based prototype for rapidly testing algorithms and ideas for domain coupling and contact in solid mechanics.



https://github.com/sandialabs/Norma.jl



Albany-LCM (Laboratory for Computational Mechanics) is a research-grade, finite element code that targets multiphysics simulations on unstructured grids.



https://github.com/sandialabs/LCM



HPC development




HPC production

SIERRA/Solid Mechanics (SM) is a 3D Lagrangian finite element code for static and dynamic analysis of solids and structures. It supports implicit and explicit time integration.

https://compsim.sandia.gov/adagio/index.html


From Prototyping to Production: Using the Schwarz Method






Rubik's Cube


J. Foulk, D. Littlewood, C. Battaile, H. Lim




Tuna Can

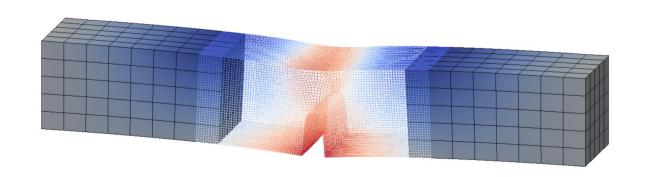


Laser Weld

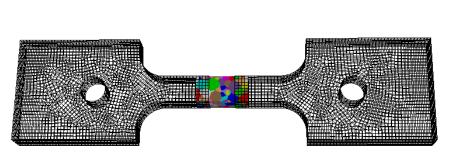

Tensile Bar C. Alleman, J. Foulk, D. Littlewood, H. Lim, G. Bergel




Bolted Joint

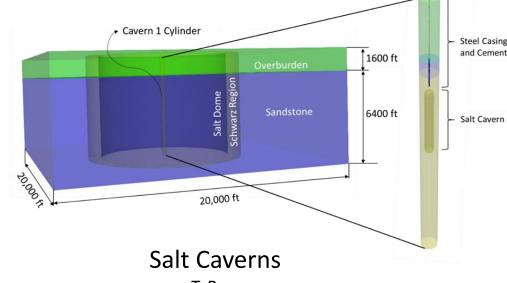

T. Ross

Tension Specimen (Overlapping & Non-Overlapping SAM)

- Uniaxial aluminum cylindrical tensile specimen with Sandia-internal plasticity *model*, *pulled* from both ends
- Domain decomposition into two subdomains (right): Ω_1 = ends, Ω_2 = gauge.
- HEX8-HEX8 coupling via overlapping and non-overlapping Schwarz
- *Implicit* Newmark time-integration with adaptive time-stepping algorithm employed in both subdomains.
- Slight imperfection introduced at center of gauge to force *necking* upon pulling in vertical direction.

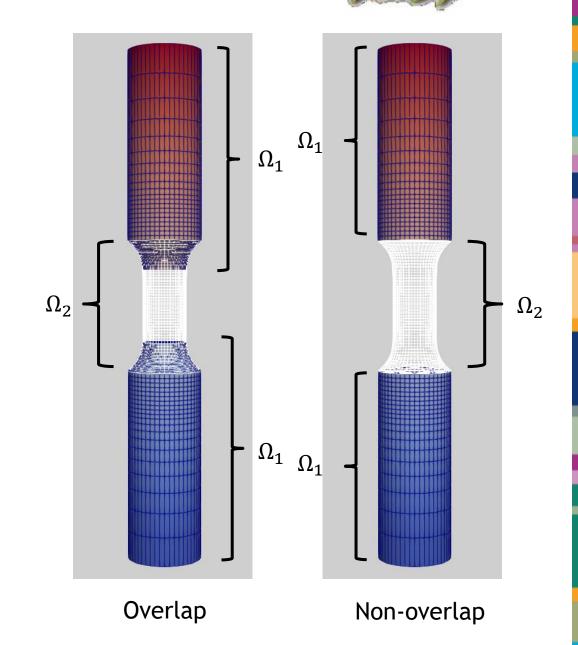

Tension Specimen: Equivalent Plastic Strain (EQPS)

Single-Domain






Non-Overlapping



	Overlap	Non-overlap
Max rel error in Ω_1	1.3e-7	2.7e-7
Max rel error in Ω_2	1.9e-3	1.8e-3

Monolithic single Ω run struggled and required Δt -cutting but SAM cases did not

Why? Problem is easier to converge with SAM: single difficult multiscale problem in Ω replaced with two easier monoscale problems in Ω_1 and Ω_2

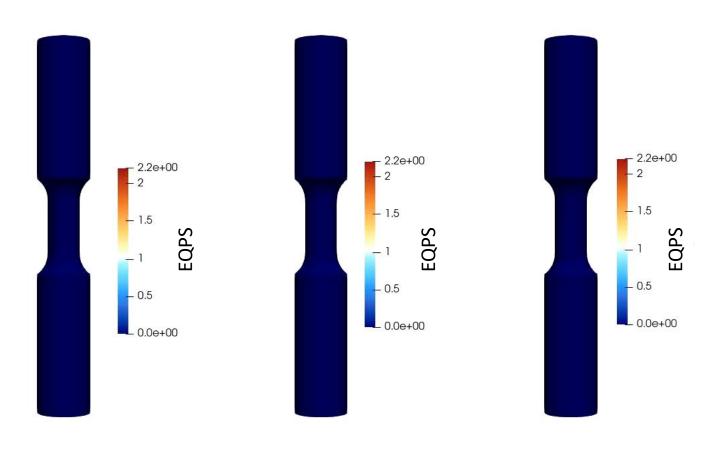


Overlapping

Bolted Joint (Overlapping SAM)


- Problem of practical scale
- Schwarz solution compared to single-domain solution on composite TET10 mesh.








- Inelastic J₂ material model in both subdomains.
 - $\triangleright \Omega_1$: steel
 - $\triangleright \Omega_2$: steel component, aluminum (bottom) plate





- BC: x-displacement = 0.02 at T = 1.0e-3 on top of parts.
- Run until T = 5.0e-4 w/ $\Delta t = 1e-5$ + implicit Newmark with analytic mass matrix for composite tet 10s.




Bolted Joint Problem: Displacement




Max relative error in Ω_1 (bolts): 0.25% Max relative error

in Ω_2 (parts): 3.6%

Errors dominated by geometric error

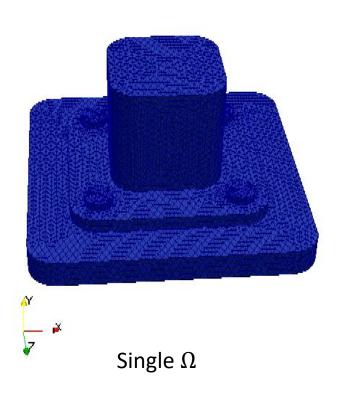


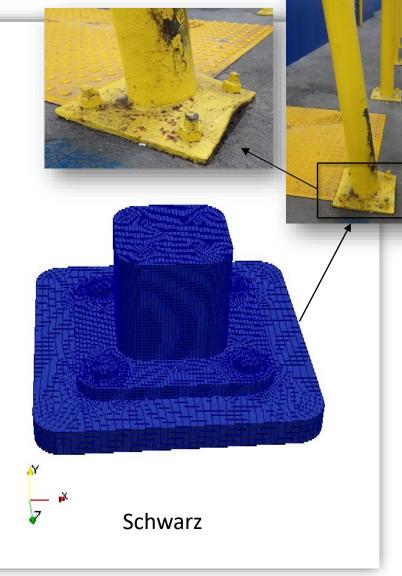

Bolted Joint Problem: Equivalent Plastic Strain (EQPS)





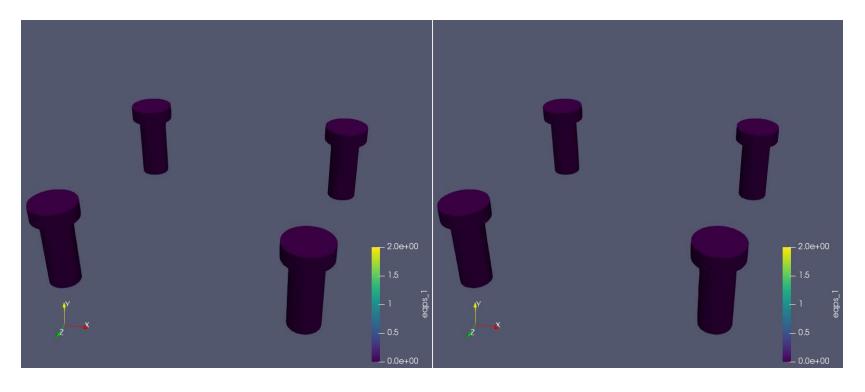

Single Ω Schwarz



	CPU times (64 procs*)	Avg # Schwarz iters	Max # Schwarz iters
Single Domain	3h 34m	_	_
Schwarz	2h 42m	3.22	4
Single Domain (finer)	17h 00m	_	_
Schwarz (finer mesh of bolts)	29h 29m	3.28	4

^{*} On SNL ascicgpu15, 16, 17 machines (Intel Skylake CPU processor), Schwarz tol = 1e-6.



	CPU times (64 procs*)	Avg # Schwarz iters	Max # Schwarz iters
Single Domain	3h 34m	_	_
Schwarz	2h 42m	3.22	4
Single Domain (finer)	17h 00m	_	_
Schwarz (finer mesh of bolts)	29h 29m	3.28	4

Schwarz 36% faster than single domain

Despite its iterative nature, (even multiplicative) Schwarz can actually be *faster* than single domain run for discretizations having comparable # of elements in the bolts!




	CPU times (64 procs*)	Avg # Schwarz iters	Max # Schwarz iters
Single Domain	3h 34m	_	
Schwarz	2h 42m	3.22	4
Single Domain (finer)	17h 00m	_	_
Schwarz (finer mesh of bolts)	29h 29m	3.28	4

Schwarz 36% faster than single domain

Despite its iterative nature, (even multiplicative) Schwarz can actually be *faster* than single domain run for discretizations having comparable # of elements in the bolts!

• (Multiplicative) Schwarz converges in just **2-4 Schwarz iterations** per time-step despite the **small overlap**.






	CPU times (64 procs*)	Avg # Schwarz iters	Max # Schwarz iters
Single Domain	3h 34m	_	_
Schwarz	2h 42m	3.22	4
Single Domain (finer)	17h 00m	_	_
Schwarz (finer mesh of bolts)	29h 29m	3.28	4

Schwarz 36% faster than single domain

Schwarz 73% slower than single domain

Despite its iterative nature, (even multiplicative) Schwarz can actually be *faster* than single domain run for discretizations having comparable # of elements in the bolts!



- (Multiplicative) Schwarz converges in just **2-4 Schwarz iterations** per time-step despite the **small overlap**
- Schwarz is not always faster (as expected).



While we would like comparable CPU times, analysts are OK with slowdowns of as much as 3-4× if meshing is simplified significantly.


^{*} On SNL ascicgpu15, 16, 17 machines (Intel Skylake CPU processor), Schwarz tol = 1e-6.


Laser Weld (Overlapping & Non-Overlapping SAM)

1

- Problem of practical scale
- Geometry is pulled dynamically from both ends
- Two variants of this problem to demonstrate:
 - 1. Improving performance via mesh/DD design
 - > Two subdomains (below): holder, gauge
 - Overlapping SAM + plastic
 - 2. Overlapping & non-overlapping coupling of >2 subdomains
 - Three subdomains (right): two holders (yellow + blue) + gauge (white)
 - Overlapping & non-overlapping SAM + hyperelastic
- Goal: model stress/strain localization in the weld subject to tension.

NORMA.JL






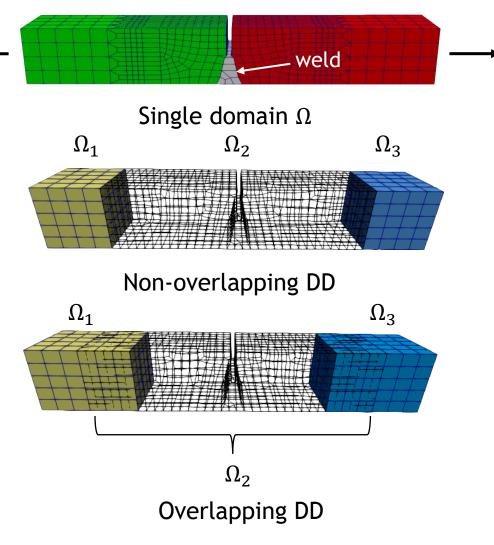


Illustration of geometry and DDs for simple variant (above) and more complex (left) variant of the laser weld problem.

Laser Weld: Improving Performance via Mesh/DD Design

 Production laser weld problem in SIERRA/SM with plasticity

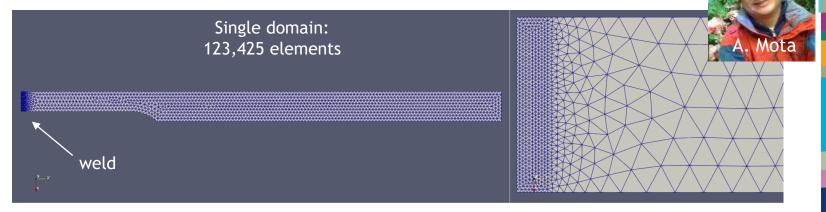


Simulation Type	Wall Time 64 procs
Single domain	3 hr 17 min



Laser Weld: Improving Performance via Mesh/DD Design

- Production laser weld problem in SIERRA/SM with plasticity
- Overlapping Schwarz with naïve DD/meshing takes $\sim 3 \times$ longer to run than single Ω solve

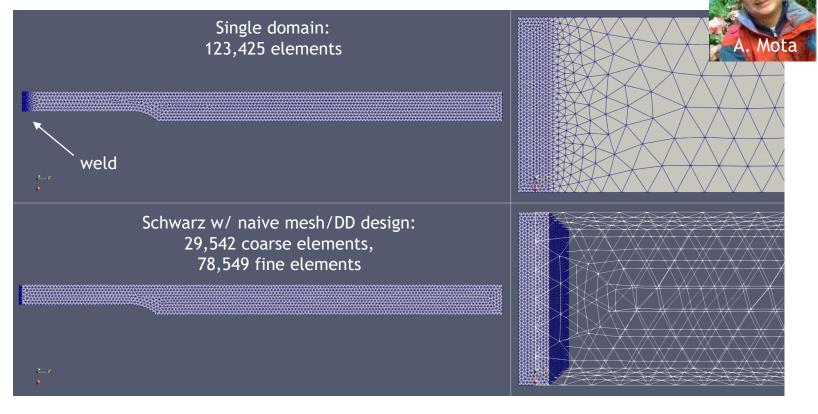





Simulation Type	Wall Time 64 procs
Single domain	3 hr 17 min
Overlapping SAM (16 iters, naïve DD and mesh design)	10 hr 14 min

 Production laser weld problem in SIERRA/SM with plasticity

• Overlapping Schwarz with naïve DD/meshing takes $\sim 3 \times$ longer to run than single Ω solve

Schwarz performance can be improved by ~3× while maintaining the same accuracy by optimizing the mesh design

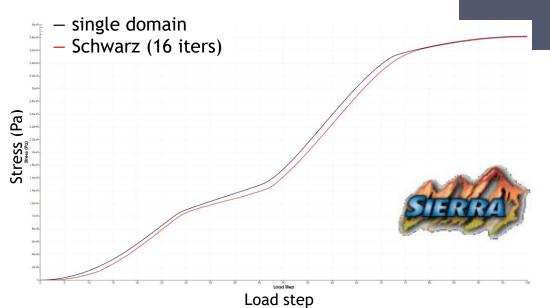

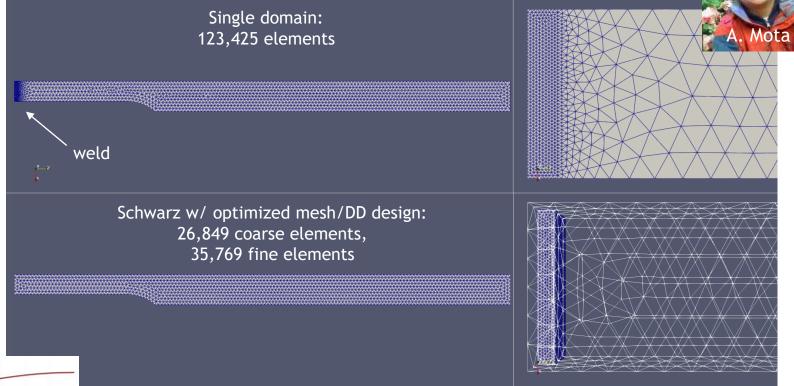

Simulation Type	Wall Time 64 procs
Single domain	3 hr 17 min
Overlapping SAM (16 iters, naïve DD and mesh design)	10 hr 14 min
Overlapping SAM (16 iters, optimized DD and mesh design)	3 hr 37 min

Work in Progress: Bayesian Optimization of SAM Parameters




• Risk: Manual SAM DD tuning is often expert-driven, trial-and-error, costly and tedious


C. Wentland

- Mitigation: multi-objective (MO) optimization
 - Minimize CPU time + stress recovery-based error indicator, two competing metrics
- **GPTune:** developed by Lawrence Berkeley Lab
 - Bayesian, gradient-free optimization of black box models (Norma.jl, Albany-LCM, SIERRA/SM)
 - Intelligently learns interpretable Gaussian process (GP) surrogate of model with baked-in UQ
 - > Reduces search time w.r.t. grid/random search
 - Balances total mesh size, SAM convergence speed and solution accuracy with minimal user input
- Optimization parameters: interface location, subdomain count, overlap size, relaxation parameter

GPTune auto-tuning of Schwarz interface location can **reduce CPU time** by >80% without sacrificing accuracy.

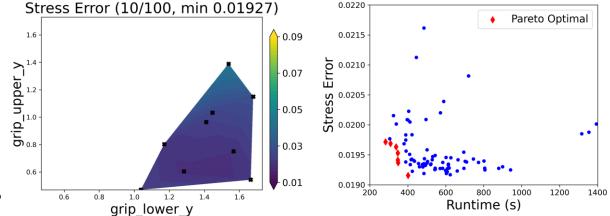


Naïve: 735 s

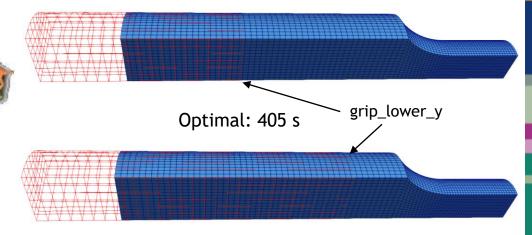

Movie top right: parameter sampling for lower and upper boundary of tension specimen w/ MO target. Plots bottom right: optimal interface placement (bottom) decreases cost by 25% over naïve interface placement (top).


Laser Weld: What about Coupling > 2 Subdomains?









Our DDs are physically motivated. We usually have 3-4 subdomains (5-10 max).











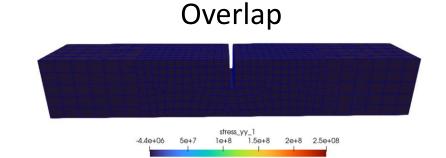

	Overlap	Non-overlap
Max rel error in gauge	6.2e-4	1.5e-4
Mean # Schwarz iters	11.1	36.7




Single Domain




Laser Weld: What about Coupling > 2 Subdomains?









Our DDs are physically motivated. We usually have 3-4 subdomains (5-10 max).










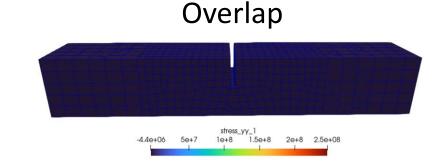


	Overlap	Non-overlap
Max rel error in gauge	6.2e-4	1.5e-4
Mean # Schwarz iters	11.1	36.7

Non-overlapping Schwarz takes
 ~ 3.3× more Schwarz iterations
 and is ~2.8× slower than
 overlapping Schwarz



Single Domain



We are exploring several mechanisms for accelerating non-overlapping Schwarz.

44

Work in Progress: Optimizing Non-Overlapping Schwarz via Transmission Condition Design

- C. Rodriguez

- Risk: non-overlapping Schwarz can be slow to converge w/ Dirichlet-Neumann TCs.
- Mitigation: explore optimized Robin-Robin transmission conditions and relaxation.

General non-overlapping Schwarz formulation

$$\begin{cases}
\mathbf{M}_1 \ddot{\mathbf{u}}_1^{(s+1)} + \mathbf{K}_1 \mathbf{u}_1^{(s+1)} &= \mathbf{F}_1^{(s+1)} & \text{in } \Omega_1 \\
\mathbf{u}_1^{(s+1)} &= \mathbf{u}_D & \text{on } \partial_{\Psi} \Omega_1 \backslash \Gamma \\
\alpha_{12} \mathbf{T}_1^{(s+1)} + \beta_{12} \mathbf{u}_1^{(s+1)} &= \mathbf{\lambda}_1^{(s+1)} & \text{on } \Gamma
\end{cases}$$

$$\begin{cases}
M_2 \ddot{\boldsymbol{u}}_2^{(s+1)} + \boldsymbol{K}_2 \boldsymbol{u}_2^{(s+1)} &= \boldsymbol{F}_2^{(s+1)} & \text{in } \Omega_2 \\
\boldsymbol{u}_2^{(s+1)} &= \boldsymbol{u}_D & \text{on } \partial_{\Psi} \Omega_2 \backslash \Gamma \\
\alpha_{21} \boldsymbol{T}_2^{(s+1)} + \beta_{21} \boldsymbol{u}_2^{(s+1)} &= \boldsymbol{\lambda}_2^{(s+1)} & \text{on } \Gamma
\end{cases}$$

$$\lambda_1^{(s+1)} = \theta_1 \left[\alpha_{12} T_2^{(s)} + \beta_{12} u_2^{(s)} \right] + (1 - \theta_1) \lambda_1^{(s)}$$
$$\lambda_2^{(s+1)} = \theta_2 \left[\alpha_{21} T_1^{(s+1)} + \beta_{21} u_1^{(s+1)} \right] + (1 - \theta_2) \lambda_2^{(s)}$$




Practical concern:
Robin BCs not readily
available in solid
mechanics codes

General transmission conditions which can be **Dirichlet-Neumann** or **Robin-Robin**

Relaxation
through
parameters θ_i



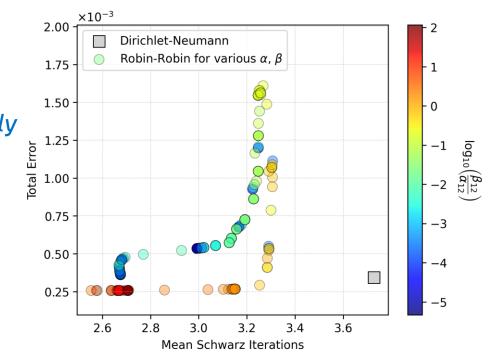

Optimized Robin-Robin TCs can give to faster convergence (29% less Schwarz iterations) and lower errors (by up to 25%) than Dirichlet-Neumann TCs.

Work in Progress: Accelerating Non-Overlapping Schwarz



G. Sambataro

• Risk: non-overlapping Schwarz can be slow to converge w/ Dirichlet-Neumann TCs.

• Mitigation: explore accelerating Dirichlet-Neumann Schwarz via Aitken and Anderson acceleration.

Non-overlapping Dirichlet-Neumann Schwarz

$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{1}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} \text{, in } \Omega_{1} \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{1} \backslash \Gamma \\ \boldsymbol{\varphi}_{1}^{(n+1)} = \boldsymbol{\lambda}_{n+1} & \text{on } \Gamma \end{cases}$$
$$\begin{cases} \operatorname{Div} \boldsymbol{P}_{2}^{(n+1)} + \rho \boldsymbol{B}(t_{i}) = \boldsymbol{0} \text{, in } \Omega_{2} \\ \boldsymbol{\varphi}_{2}^{(n+1)} = \boldsymbol{\chi}, & \text{on } \partial \Omega_{2} \backslash \Gamma \\ \boldsymbol{P}_{2}^{(n+1)} \boldsymbol{n} = \boldsymbol{P}_{2}^{(n+1)} \boldsymbol{n}, & \text{on } \Gamma \end{cases}$$

Aitken acceleration can **reduce** the # of Schwarz iterations by 3× and has virtually **no tuning knobs**.


Minimal tuning knobs improves usability.


Classical relaxation:
$$\lambda_{n+1} = \theta \varphi_2^{(n)} + (1-\theta)\lambda_n$$
, on Γ , for $n \ge 1$

Aitken acceleration:
$$\lambda_{n+1} = \boldsymbol{\varphi}_1^{(n)} + \theta^{(n-1)} \left(\boldsymbol{\varphi}_2^{(n-1)} - \boldsymbol{\varphi}_1^{(n-1)} \right)$$

$$\theta^{(n)} = -\frac{\left(\boldsymbol{\varphi}_2^{(n)} - \boldsymbol{\varphi}_1^{(n)} - \boldsymbol{\varphi}_2^{(n-1)} - \boldsymbol{\varphi}_1^{(n-1)} \right) \cdot \left(\boldsymbol{\varphi}_1^{(n)} - \boldsymbol{\varphi}_1^{(n-1)} \right)}{\left\| \boldsymbol{\varphi}_2^{(n)} - \boldsymbol{\varphi}_1^{(n)} - \boldsymbol{\varphi}_2^{(n-1)} - \boldsymbol{\varphi}_1^{(n-1)} \right\|^2}$$

Anderson acceleration:
$$\lambda_{n+1} = \sum_{j=0}^{m} \theta^{(n)} T(\lambda_{k-m+j})$$
, $\theta^{(n)}$ from optimization problem

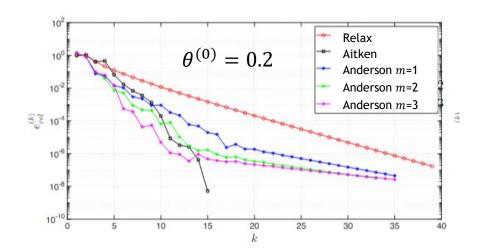

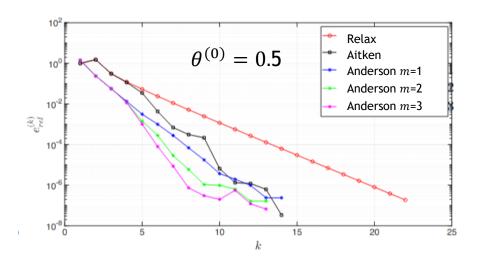

References on SAM for FOM-FOM Coupling in Solid Mechanics



Quasistatic Schwarz:

A. Mota, I. Tezaur, C. Alleman. "The Schwarz alternating method in solid mechanics", Comput. Meth. Appl. Mech. Engng. 319 19-51, 2017.

Dynamic Schwarz:

A. Mota, I. Tezaur, G. Phlipot. "The Schwarz alternating method for dynamic solid mechanics", Int. J. Numer. Meth. Engng. 123(21) 5036-5071, 2022.

Transmission Condition Design for Non-Overlapping Schwarz:

C. Rodriguez, I. Tezaur, A. Mota, A. Gruber, E. Parish, C. Wentland. "Transmission Conditions for the Non-Overlapping Schwarz Coupling of Full Order and Operator Inference Models", Computer Science Research Institute Summer Proceedings 2025, Sandia National Laboratories, 2025. https://arxiv.org/abs/2509.12228























I. Tezaur

A. Mota

C. Alleman

B. Phung


G. Phlipot


T. Shelton C. Rodriguez M. Merewether G. Sambataro


Outline

- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



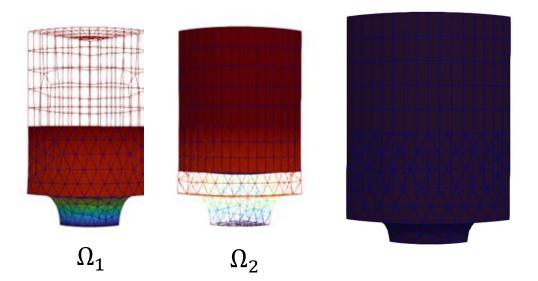








Motivation: Multiscale & Multiphysics Coupling for Predictive Digital Twins



There exist established rigorous mathematical theories for **coupling** multiscale/multiphysics components based on traditional discretization methods (FOM).

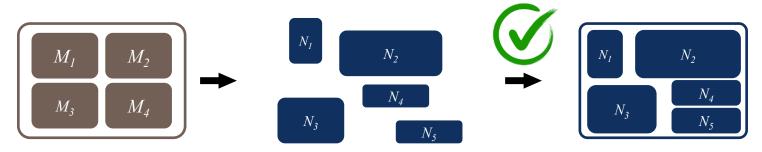




- PDEs, ODEs
- Nonlocal integral
- Classical DFT
- Atomistic, ...

Traditional Methods

- Mesh-based (FE, FV, FD)
- Meshless (SPH, MLS)
- Implicit, explicit
- Eulerian, Lagrangian, ...

Coupled Numerical Model

- Monolithic (Lagrange multipliers)
- Partitioned (loose) coupling
- Iterative (Schwarz, optimization)

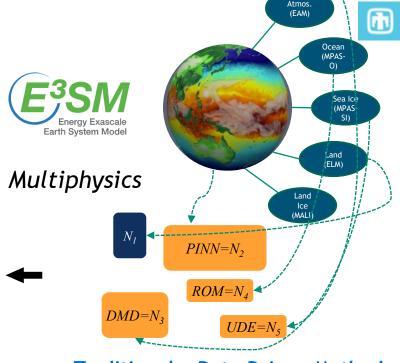


Traditional + Data-Driven Methods

- **PINNs**
- **Neural ODEs**
- Projection-based ROMs, ...


Motivation: Multiscale & Multiphysics Coupling for Predictive Digital Twins



There exist established **rigorous mathematical theories** for **coupling** multiscale/multiphysics components based on **traditional discretization methods** (FOM).





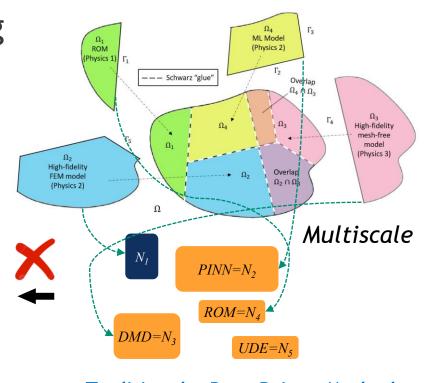

Complex System Model

- PDEs, ODEs
- Nonlocal integral
- Classical DFT
- Atomistic, ...

Traditional Methods

- Mesh-based (FE, FV, FD)
- Meshless (SPH, MLS)
- Implicit, explicit
- Eulerian, Lagrangian, ...

Coupled Numerical Model

- Monolithic (Lagrange multipliers)
- Partitioned (loose) coupling
- Iterative (Schwarz, optimization)

Traditional + Data-Driven Methods

- PINNs
- Neural ODEs
- Projection-based ROMs, ...

Deficiencies of data-driven models and couplings involving them:

- Existing coupling methods for high-fidelity models may not work out-of-the-box when including data-driven models
- > ROMs can suffer from lack of robustness, stability and accuracy, and cannot be easily refined to achieve a specified accuracy





Analysts do not want models that are fast but wrong!

Motivation: Multiscale & Multiphysics Coupling for Predictive Digital Twins



There exist established **rigorous mathematical theories** for **coupling** multiscale/multiphysics components based on **traditional discretization methods** (FOM).

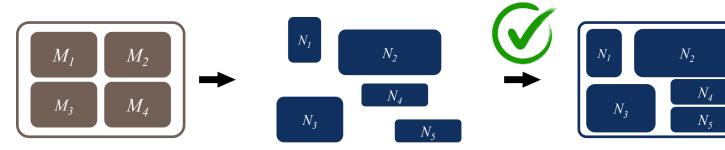

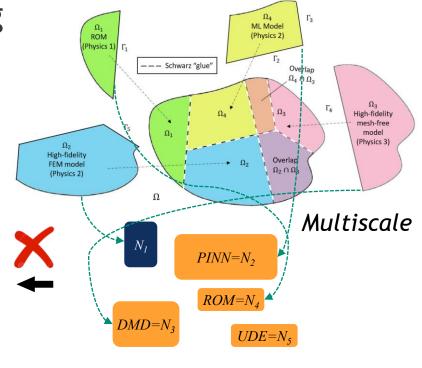

Complex System Model

- PDEs, ODEs
- Nonlocal integral
- Classical DFT
- Atomistic, ...

Traditional Methods

- Mesh-based (FE, FV, FD)
- Meshless (SPH, MLS)
- Implicit, explicit
- Eulerian, Lagrangian, ...

Coupled Numerical Model

- Monolithic (Lagrange multipliers)
- Partitioned (loose) coupling
- Iterative (Schwarz, optimization)


Traditional + Data-Driven Methods

- PINNs
- Neural ODEs
- Projection-based ROMs, ...

Deficiencies of data-driven models and couplings involving them:

- Existing coupling methods for high-fidelity models may not work out-of-the-box when including data-driven models
- > ROMs can suffer from lack of robustness, stability and accuracy, and cannot be easily refined to achieve a specified accuracy

Proposed solution: Schwarz & (soon) online model switching





Projects on Coupling for Predictive Hybrid Models



Three projects:

- FHNM: Flexible Heterogeneous Numerical Methods [LDRD, FY22-FY24]
- M2dt: Multi-faceted Mathematics for Predictive Digital Twins [ASCR, FY23-FY27]
- AHEAD: Adaptive Hybrid modEls via domAin Decomposition [LDRD, FY25-FY27]





Principal research objective:

- Develop rigorous methods to enable the "plug-and-play" coupling of standard and data-driven
 models from the following classes
 - > Class A: intrusive projection-based ROMs
 - > Class B: machine-learned models
 - > Class C: flow map approximation models, i.e., dynamic model decomposition (DMD)
 - > Class D: non-intrusive operator inference (OpInf) ROMs

Three classes of coupling methods:

- Alternating Schwarz-based coupling [FHNM, M2dt, AHEAD]
- Optimization-based coupling [FHNM, M2dt]
- Coupling via generalized mortar methods [FHNM, M2dt]

Office of Science

Projects on Coupling for Predictive Hybrid Models



Three projects:

- FHNM: Flexible Heterogeneous Numerical Methods [LDRD, FY22-FY24]
- M2dt: Multi-faceted Mathematics for Predictive Digital Twins [ASCR, FY23-FY27]
- AHEAD: Adaptive Hybrid modEls via domAin Decomposition [LDRD, FY25-FY27]





Office of Science

Principal research objective:

- Develop rigorous methods to enable the "plug-and-play" coupling of standard and data-driven
 models from the following classes
 - > Class A: intrusive projection-based ROMs
 - > Class B: machine-learned models
 - > Class C: flow map approximation models, i.e., dynamic model decomposition (DMD)
 - \triangleright Class D: non-intrusive operator inference (OpInf) ROMs \rightarrow this talk

Three classes of coupling methods:

- Alternating **Schwarz**-based coupling [FHNM, M2dt, AHEAD] → this talk
- Optimization-based coupling [FHNM, M2dt]
- Coupling via generalized mortar methods [FHNM, M2dt]


Why? Less intrusive to integrate into production codes.




Less intrusive methods are preferred!


₅₃ Outline

- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



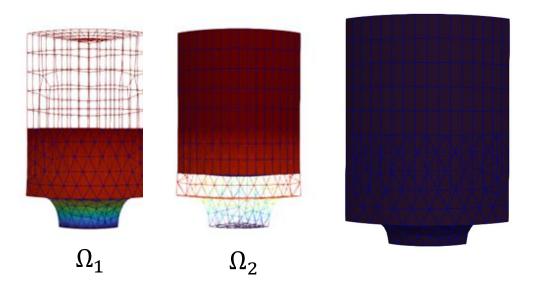









Projection-Based Model Order Reduction via the POD/Galerkin Method


1

Full Order Model (FOM): $M \frac{d^2 u}{dt^2} + f_{int}(u) = f_{ext}$

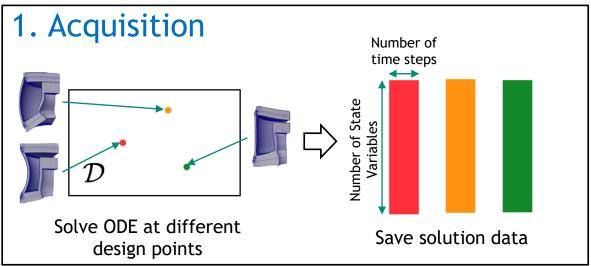

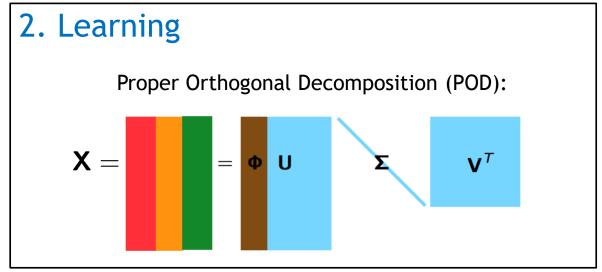



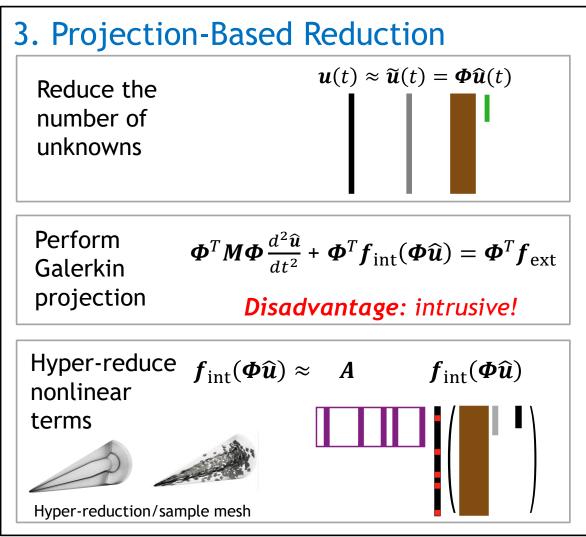

HROM = Hyper-reduced ROM


Non-Intrusive Model Order Reduction via OpInf*




Key Idea Behind OpInf: circumvent the burden of implementing intrusive ROMs in HPC codes by combining projectionbased ROM and machine learning (ML).

Nuances:

- Opinf can be applied to **nonlinear problems** by transforming the nonlinear PDEs into PDEs with a polynomial functional form ("lifting" [Qian et al., 2019]) or assuming a polynomial functional form for the ROM
- The OpInf least-squares (LS) minimization problem often requires **regularization** to be solvable, e.g., Tikhonov regularization
- **Structure preservation** (e.g., symmetry constraints) can be incorporated into the OpInf LS minimization problem

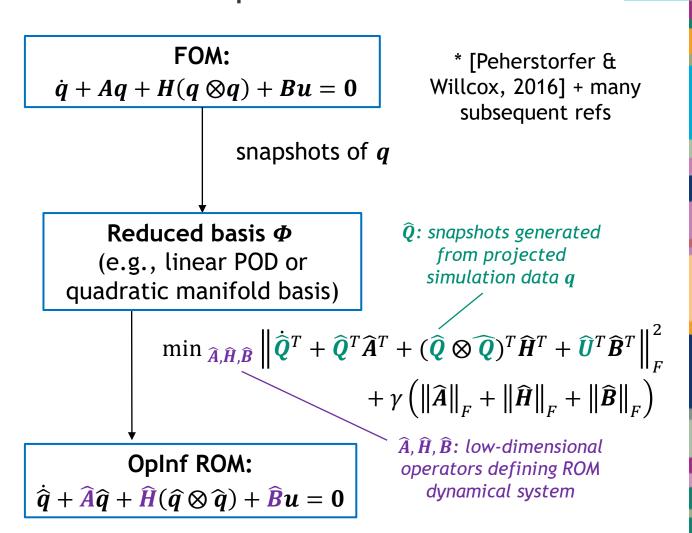






Offline stage:

- Create **DD** of Ω into d overlapping subdomains Ω_i
- Perform a SAM-coupled all-FOM simulation on $\bigcup_i \Omega_i$
- Compute **POD** basis Φ_i on each Ω_i
- Assume a **functional form** for your ROM in Ω_i , informed by the functional form of the corresponding FOM
 - **Key question:** how to impose Schwarz BCs in OpInf ROMs?

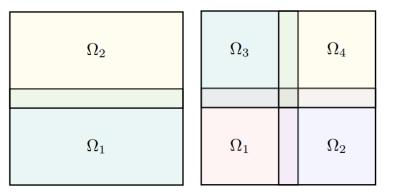

OpInf ROM in
$$\Omega_i$$
:


$$\dot{\widehat{q}}_i + \widehat{A}_i \widehat{q}_i + \widehat{H}_i (\widehat{q}_i \otimes \widehat{q}_i) = \mathbf{0}$$


57

Overlapping SAM-based Coupling for Non-Intrusive OpInf ROMs

Offline stage:

- Create **DD** of Ω into d overlapping subdomains Ω_i
- Perform a SAM-coupled all-FOM simulation on $\bigcup_i \Omega_i$
- Compute **POD** basis Φ_i on each Ω_i
- Assume a **functional form** for your ROM in Ω_i , informed by the functional form of the corresponding FOM
 - **Key question**: how to impose Schwarz BCs in OpInf ROMs?
 - \clubsuit Boundary transmission enters through learned source term $\widehat{B}_i g_i$ added to OpInf ROM dynamical system

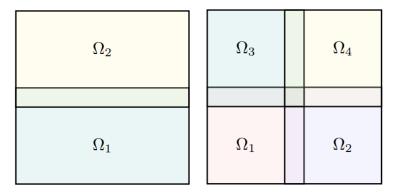

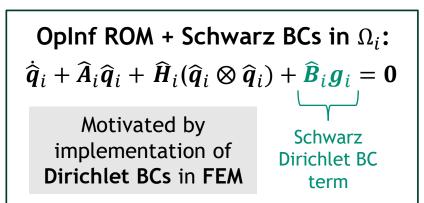



Offline stage:


- Create **DD** of Ω into d overlapping subdomains Ω_i
- Perform a SAM-coupled all-FOM simulation on $\bigcup_i \Omega_i$
- Compute **POD** basis Φ_i on each Ω_i
- Assume a **functional form** for your ROM in Ω_i , informed by the functional form of the corresponding FOM
 - **Key question**: how to impose Schwarz BCs in OpInf ROMs?
 - \Leftrightarrow Boundary transmission enters through learned source term $\widehat{B}_i g_i$ added to OpInf ROM dynamical system
 - ***** Further reduction achieved by expanding g_i in its own POD basis Φ_i^g and approximating $\widehat{B}_i g_i \approx \widehat{B}_i \widehat{g}_i = \widetilde{B}_i g_i$ where $\widehat{g}_i = \Phi_i^g g_i$


Ω_2	Ω_3	Ω_4
Ω_1	Ω_1	Ω_2

OpInf ROM + Schwarz BCs in
$$\Omega_i$$
:
$$\hat{q}_i + \hat{A}_i \hat{q}_i + \hat{H}_i (\hat{q}_i \otimes \hat{q}_i) + \underbrace{\tilde{B}_i g_i}_{\text{Schwarz}} = \mathbf{0}$$
 Motivated by implementation of Dirichlet BCs in FEM

Offline stage:

- Create **DD** of Ω into d overlapping subdomains Ω_i
- Perform a SAM-coupled all-FOM simulation on $\bigcup_i \Omega_i$
- Compute **POD** basis Φ_i on each Ω_i
- Assume a functional form for your ROM in Ω_i , informed by the functional form of the corresponding FOM
 - **Key question**: how to impose Schwarz BCs in OpInf ROMs?
 - Boundary transmission enters through learned source **term** $\hat{B}_i g_i$ added to OpInf ROM dynamical system
 - Further reduction achieved by expanding g_i in its own POD basis Φ_i^g and approximating $\widehat{B}_i g_i \approx \widehat{B}_i \widehat{g}_i = \widetilde{B}_i g_i$ where $\widehat{\boldsymbol{g}}_i = \boldsymbol{\Phi}_i^g \boldsymbol{g}_i$
- Compute OpInf operators \widehat{A}_i , \widehat{H}_i and \widetilde{B}_i in each subdomain Ω_i by solving regularized OpInf LS minimization problem

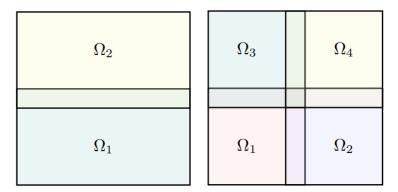


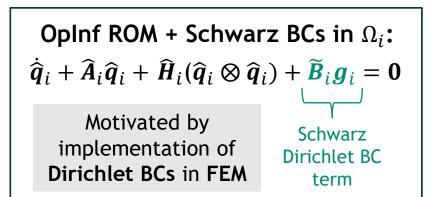




Offline stage:

- Create **DD** of Ω into d overlapping subdomains Ω_i
- Perform a SAM-coupled all-FOM simulation on $\bigcup_i \Omega_i$
- Compute **POD** basis Φ_i on each Ω_i
- Assume a functional form for your ROM in Ω_i , informed by the functional form of the corresponding FOM
 - **Key question**: how to impose Schwarz BCs in OpInf ROMs?
 - \clubsuit Boundary transmission enters through learned source term $\widehat{B}_i g_i$ added to OpInf ROM dynamical system
 - ***** Further reduction achieved by expanding g_i in its own POD basis Φ_i^g and approximating $\widehat{B}_i g_i \approx \widehat{B}_i \widehat{g}_i = \widetilde{B}_i g_i$ where $\widehat{g}_i = \Phi_i^g g_i$
- Compute OpInf operators \widehat{A}_i , \widehat{H}_i and \widetilde{B}_i in each subdomain Ω_i by solving regularized OpInf LS minimization problem

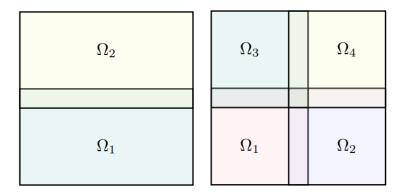

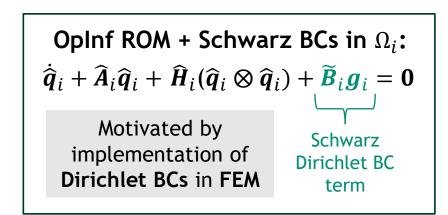

Online stage:


• Apply **Schwarz iteration procedure**, with Schwarz BC transfer via pre-learned boundary contributions $\widetilde{\pmb{B}}_i {m g}_i$


61

Outline

- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



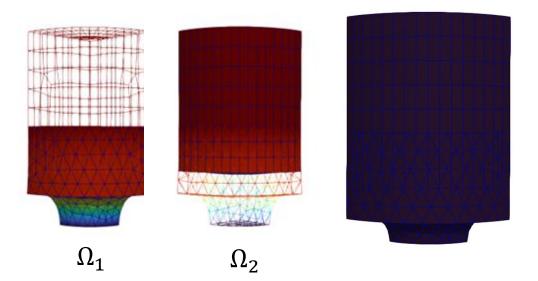








- Hyperelastic variant of previous problem (Neohookean material model)
- TET10 HEX8 overlapping coupling with implicit Newmark with same ∆t
- **QOpInf** models with M=2 POD modes, capturing 99.999% snapshot energy
- All results are predictive w.r.t. DBC applied at top of holder

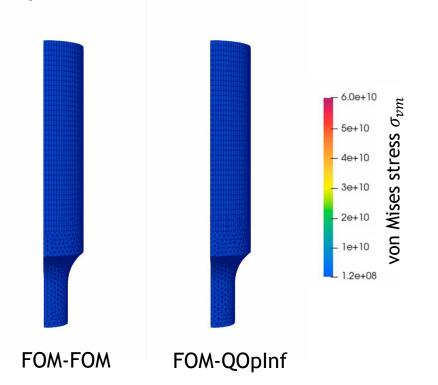


		FOM-FOM	FOM-QOpInf	QOpInf-QOpInf
_	displacement		3.44e-4	5.73e-4
Ω_1 rel errs	velocity		1.72e-2	1.83e-2
	σ_{vm} stress		3.41e-4	8.53e-4
	displacement		2.50e-4	4.41e-4
Ω_2 rel errs	velocity		1.86e-2	1.96e-2
	σ_{vm} stress	_	2.40e-3	6.00e-3
CPU time	_	8h 19m 29.5s	1h 21m 25.9s	4m 42.1s
Mean/max # Schwarz iters	_	32.0/32	7.03/8	7.74/8





- **Hyperelastic** variant of previous problem (Neohookean material model)
- TET10 HEX8 overlapping coupling with implicit Newmark with same ∆t
- **QOpInf** models with M=2 POD modes, capturing 99.999% snapshot energy
- All results are predictive w.r.t. DBC applied at top of holder

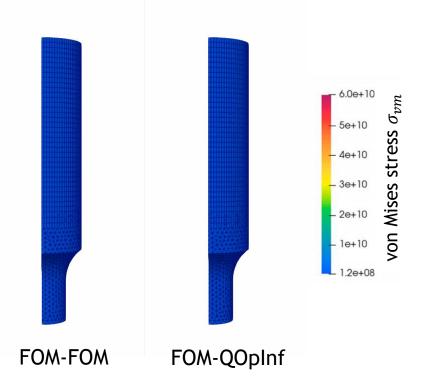


		FOM-FOM	FOM-QOpInf	QOpInf-QOpInf
	displacement	-	3.44e-4	5.73e-4
Ω_1 rel errs	velocity		1.72e-2	1.83e-2
	σ_{vm} stress	-	3.41e-4	8.53e-4
Ω_2 rel errs	displacement	-	2.50e-4	4.41e-4
	velocity	_	1.86e-2	1.96e-2
	σ_{vm} stress	_	2.40e-3	6.00e-3
CPU time	_	8h 19m 29.5s	1h 21m 25.9s	4m 42.1s
Mean/max # Schwarz iters	_	32.0/32	7.03/8	7.74/8

Relative errors of O(1e-4)-O(1e-3) are achieved for the displacement and von Mises stress (σ_{vm})





- **Hyperelastic** variant of previous problem (Neohookean material model)
- TET10 HEX8 overlapping coupling with implicit Newmark with same ∆t
- **QOpInf** models with M=2 POD modes, capturing 99.999% snapshot energy
- All results are predictive w.r.t. DBC applied at top of holder

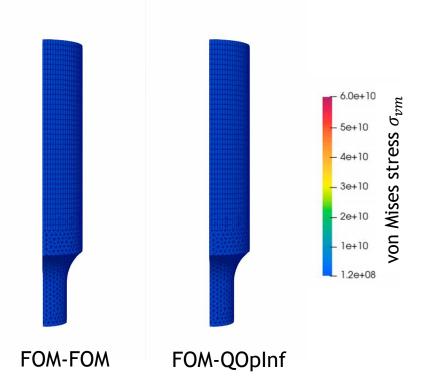

		FOM-FOM	FOM-QOpInf	QOpInf-QOpInf
	displacement	_	3.44e-4	5.73e-4
Ω_1 rel errs	velocity	_	1.72e-2	1.83e-2
	$\sigma_{\!vm}$ stress	_	3.41e-4	8.53e-4
	displacement	_	2.50e-4	4.41e-4
Ω_2 rel errs	velocity	_	1.86e-2	1.96e-2
	$\sigma_{\!vm}$ stress	_	2.40e-3	6.00e-3
CPU time	_	8h 19m 29.5s	1h 21m 25.9s	4m 42.1s
Mean/max # Schwarz iters	_	32.0/32	7.03/8	7.74/8


Relative errors of O(1e-4)-O(1e-3) are achieved for the displacement and von Mises stress (σ_{vm})

Impressive 6.13× and 106× speedups are achieved via FOM-QOpInf and QOpInf-QOpInf couplings, respectively!





- **Hyperelastic** variant of previous problem (Neohookean material model)
- TET10 HEX8 overlapping coupling with implicit Newmark with same ∆t
- **QOpInf** models with M=2 POD modes, capturing 99.999% snapshot energy
- All results are predictive w.r.t. DBC applied at top of holder

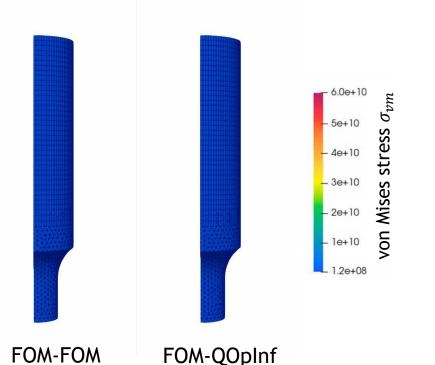

		FOM-FOM	FOM-QOpInf	QOpInf-QOpInf
	displacement	_	3.44e-4	5.73e-4
Ω_1 rel errs	velocity	_	1.72e-2	1.83e-2
	$\sigma_{\!vm}$ stress		3.41e-4	8.53e-4
	displacement	_	2.50e-4	4.41e-4
Ω_2 rel errs	velocity	_	1.86e-2	1.96e-2
	$\sigma_{\!vm}$ stress	_	2.40e-3	6.00e-3
CPU time	_	8h 19m 29.5s	1h 21m 25.9s	4m 42.1s
Mean/max # Schwarz iters	_	32.0/32	7.03/8	7.74/8

Relative errors of O(1e-4)-O(1e-3) are achieved for the displacement and von Mises stress (σ_{vm})

Impressive 6.13× and 106× speedups are achieved via FOM-QOpInf and QOpInf-QOpInf couplings, respectively!

Speedup largely due to huge reduction in # Schwarz iterations



Torsion (Overlapping SAM)

- Neohookean material model
- TET4 HEX8 overlapping coupling with implicit-explicit Newmark having different Δt
- QOpInf-FOM coupled models with M=27 and M=30 POD modes, capturing 99.999% snapshot energy
- Prediction w.r.t. initial velocity (rotation speed/direction)
- (Linear) OpInf-FOM coupling insufficient


	disp Magnitude 0.0e+00 0.01 0.02 0.03 4.3e-02	
	FOM-FOM	
************************************	1 0101-1 0101	
₹ ₹₹₹₹₹	velo Magnitude	
	1.3e-13 20 40 60 80 1.1e+02	





\mathcal{L}	nInf	= (Juadi	ratic	Onl	nf
ZU	ווווע	- (Zuaui	atic	Oμ	1111

		FOM-FOM	QOpInf-FOM reproductive	QOpInf-FOM predictive
_	displacement		2.67e-3	4.32e-2
Ω_1 rel errs	velocity		3.56e-2	1.49e-1
_	displacement		1.13e-3	2.44e-2
Ω_2 rel errs	velocity		1.12e-2	9.52e-2
CPU time	1	39m 11.8s	1m 40.2s	1m 39.5s
Mean/max # Schwarz iters	-	3.0/3	2.0/2	2.0/2

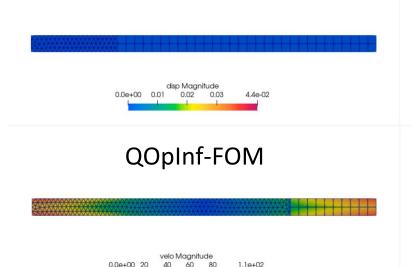






Torsion (Overlapping SAM)

- Neohookean material model
- TET4 HEX8 overlapping coupling with implicit-explicit Newmark having different Δt
- QOpInf-FOM coupled models with M=27 and M=30 POD modes, capturing 99.999% snapshot energy
- Prediction w.r.t. initial velocity (rotation speed/direction)
- (Linear) OpInf-FOM coupling insufficient

0.0e+00 0.01 0.02 0.03 4.3e-02	
FOM-FOM	
	*
velo Magnitude 1.3e-13 20 40 60 80 1.1e+02	(

		FOM-FOM	QOpInf-FOM reproductive	QOpInf-FOM predictive
Ω_1 rel errs	displacement	1	2.67e-3	4.32e-2
	velocity	_	3.56e-2	1.49e-1
	displacement	-	1.13e-3	2.44e-2
Ω_2 rel errs	velocity	-	1.12e-2	9.52e-2
CPU time	_	39m 11.8s	1m 40.2s	1m 39.5s
Mean/max # Schwarz iters	_	3.0/3	2.0/2	2.0/2

Relative errors are of O(1e-3)-O(1e-2) for displacement and velocity!

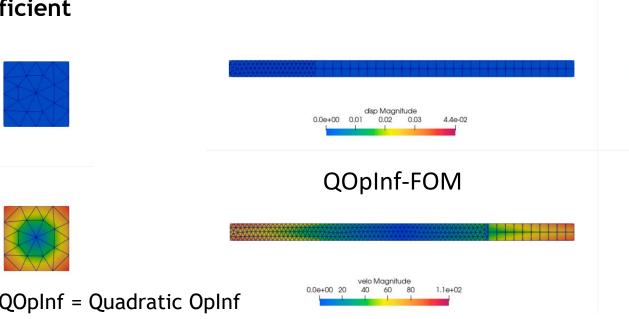






Torsion (Overlapping SAM)

- Neohookean material model
- TET4 HEX8 overlapping coupling with implicit-explicit Newmark having different At
- QOpInf-FOM coupled models with M=27 and M=30 POD modes, capturing 99.999% snapshot energy
- Prediction w.r.t. initial velocity (rotation speed/direction)
- (Linear) OpInf-FOM coupling insufficient

		FOM-FOM	QOpInf-FOM reproductive	QOpInf-FOM predictive
Ω_1 rel errs	displacement	1	2.67e-3	4.32e-2
	velocity		3.56e-2	1.49e-1
_	displacement		1.13e-3	2.44e-2
Ω_2 rel errs	velocity		1.12e-2	9.52e-2
CPU time	_	39m 11.8s	1m 40.2s	1m 39.5s
Mean/max # Schwarz iters	_	3.0/3	2.0/2	2.0/2

Relative errors are of O(1e-3)-O(1e-2) for displacement and velocity!

~23.5× speedups are achieved via QOpInf-FOM couplings

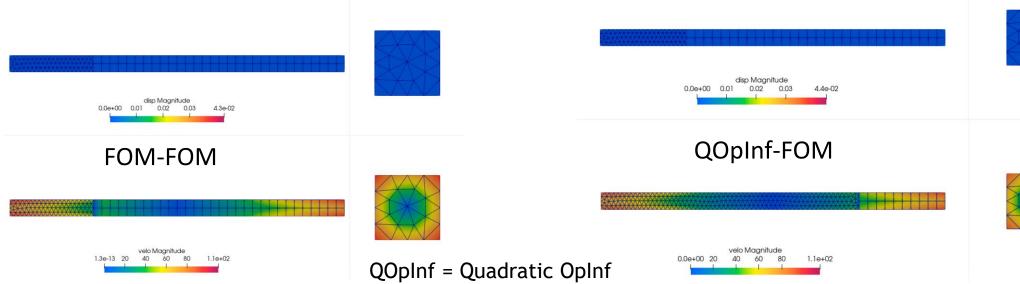





Bolted Joint (Overlapping SAM)

1

- Hyper-elastic (Saint-Venant Kirchhoff) variant of previous problem with TET10 - HEX8 meshes
- Cubic OpInf (COpInf) coupled models
- Hybrid couplings require fewer Schwarz iterations to converge
- Convergence w.r.t. basis size is observed for reproductive FOM-QOpInf couplings


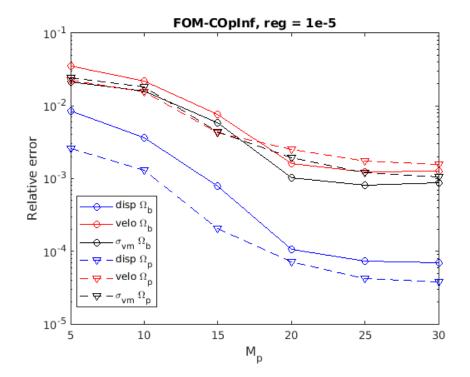



Figure left: convergence w.r.t. basis size for reproductive FOM-COpInf coupling






Bolted Joint (Overlapping SAM, Predictive): Displacements

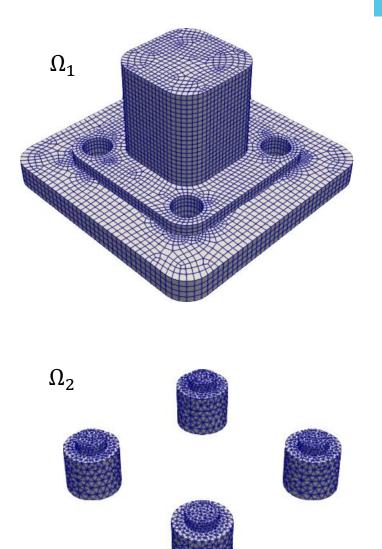

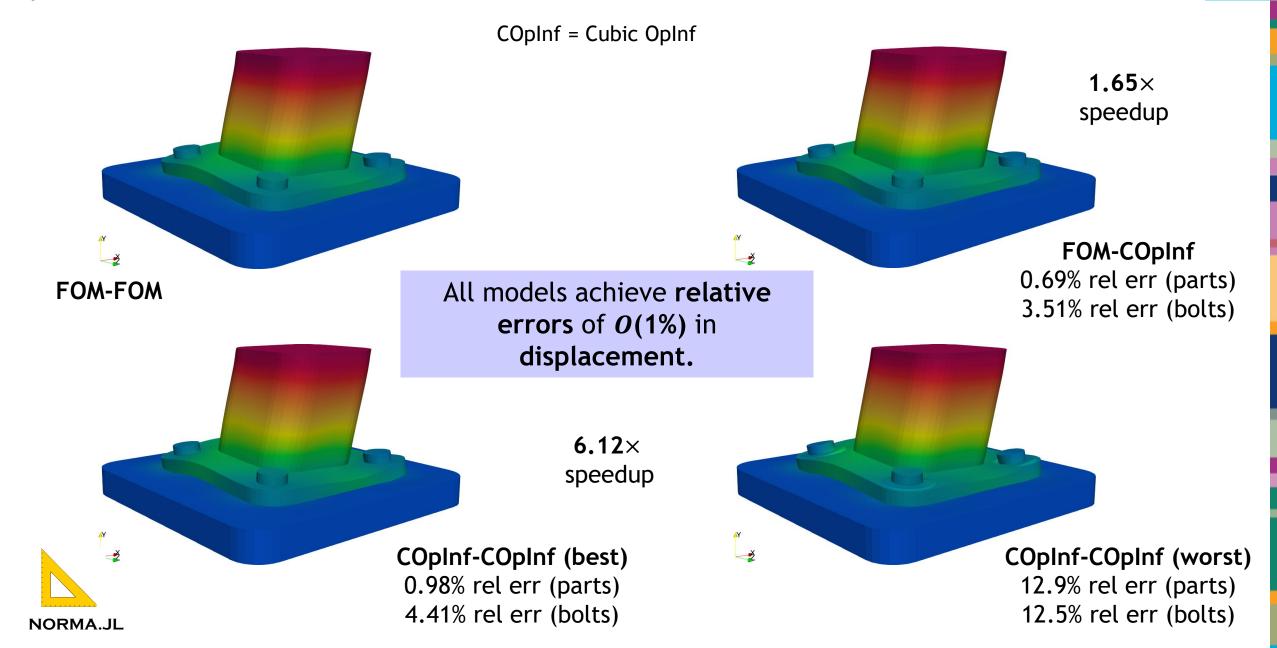

Bolted Joint (Overlapping SAM, Predictive): von Mises Stresses



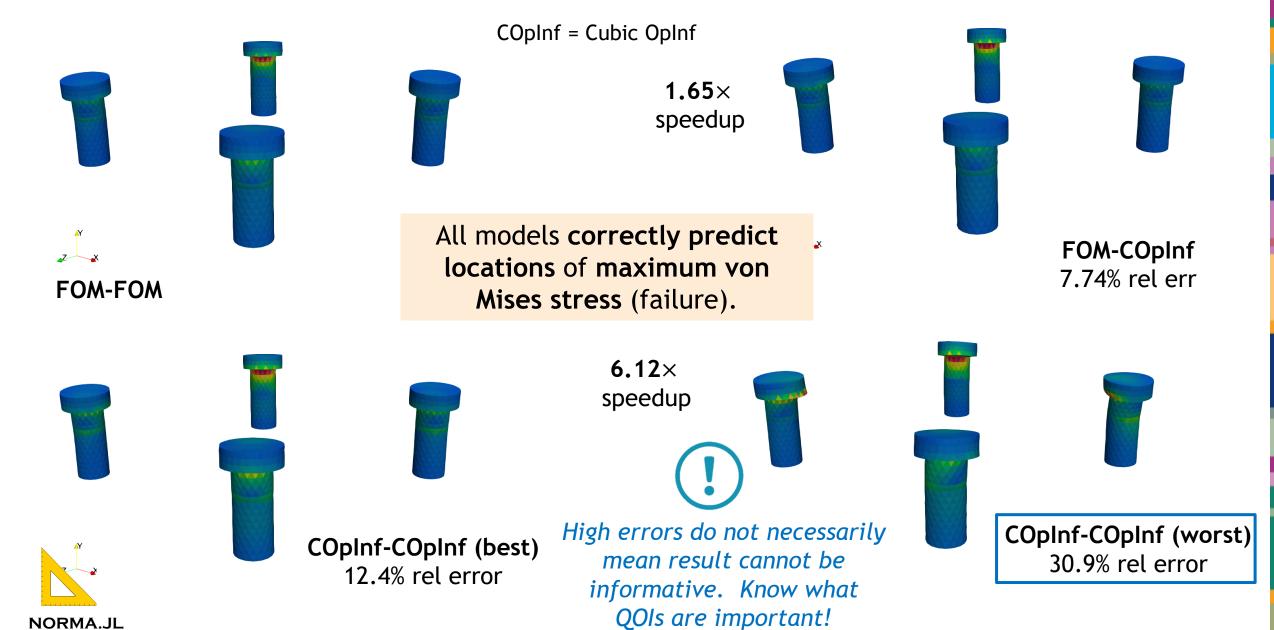

Work in Progress: SAM-based Coupling for Non-Intrusive NN-based Models





E. Parish

A. Gruber

Motivation: finite deformation mechanics does not admit a polynomial structure

Limits capacity of polynomial-based OpInf models

Approach: Develop a neural-network-based OpInf model-reduction strategy

- Can represent *general nonlinearities*
- Enforces *structure* by designing NN operators to parameterize a positive definite stiffness matrix
- Fully differentiable ML software enables standard and dynamics-constrained training

Pros: Enables accurate models for *strong nonlinearities*

Cons: Higher offline cost

FOM-SP NN

FOM-FOM

FOM-QOpInf

NN modeling strategy

$$\ddot{\widehat{q}}^{NN} + \widehat{K}(\widehat{q}^{NN}; \mathbf{w}_K) - \widehat{B}(\mathbf{u}_i, \widehat{q}^{NN}; \mathbf{w}_B) = \mathbf{0}$$

 \hat{R} , \hat{B} : NN models for stiffness and boundary forcings \mathbf{w}_{K} , \mathbf{w}_{R} : Learnable parameters

Structure is enforced via SPD parameterization of stiffness:

$$\widehat{\pmb{K}} = \widehat{\pmb{L}}\widehat{\pmb{D}}\widehat{\pmb{L}}^T$$

Enforced structure significantly improves performance

Future work: Hamiltonian parameterizations

Training paradigms

Offline (traditional) training

$$min_{\boldsymbol{w}_K,\boldsymbol{w}_B} \sum_{i=1}^N (\ddot{\boldsymbol{q}}_i + \widehat{\boldsymbol{K}}(\widehat{\boldsymbol{q}}_i; \boldsymbol{w}_K) - \widehat{\boldsymbol{B}}(\boldsymbol{u}_i, \widehat{\boldsymbol{q}}_i; \boldsymbol{w}_B))^2$$

Dynamics-constrained training (rollout)

$$\begin{aligned} \min_{\boldsymbol{w}_{K},\boldsymbol{w}_{B}} \sum_{i=1}^{N} (\widehat{\boldsymbol{q}}(t_{i}) - \widehat{\boldsymbol{q}}^{NN}(t_{i}))^{2} \\ \text{s.t. } \ddot{\boldsymbol{q}}^{NN} + \widehat{\boldsymbol{K}}(\widehat{\boldsymbol{q}}^{NN}; \boldsymbol{w}_{K}) - \widehat{\boldsymbol{B}}(\boldsymbol{u}_{i}, \widehat{\boldsymbol{q}}^{NN}; \boldsymbol{w}_{B}) = \boldsymbol{0} \end{aligned}$$

References on SAM for FOM-ROM and ROM-ROM Coupling

Schwarz Couplings Involving Non-Intrusive OpInf ROMs:

I. Moore, C. Wentland, A. Gruber, I. Tezaur. "Domain decomposition-based coupling of Operator Inference reduced order models via the Schwarz alternating method", CSRI Summer Proceedings 2024, Sandia National Laboratories.

https://arxiv.org/abs/2409.01433

Hot off the press/processor!

- **I. Tezaur,** E. Parish, A. Gruber, I. Moore, C. Wentland, A. Mota. "Hybrid coupling with operator inference and the overlapping Schwarz alternating method". ArXiv pre-print, 2025. https://arxiv.org/abs/2511.20687
- C. Rodriguez, I. Tezaur, A. Mota, A. Gruber, E. Parish, C. Wentland. "Transmission Conditions for the Non-Overlapping Schwarz Coupling of Full Order and Operator Inference Models", CSRI Summer Proceedings 2025, Sandia National Laboratories. https://arxiv.org/abs/2509.12228





First application of non-overlapping Schwarz to OpInf-FOM and OpInf-OpInf coupling (not in this talk).

















I. Tezaur

J. Barnett

I. Moore

E. Parish

C. Wentland

A. Gruber C. Rodriguez W. Snyder

G. Sambataro

References on SAM for FOM-ROM and ROM-ROM Coupling (cont'd)

Schwarz Couplings Involving Intrusive Projection-Based ROMs:

- J. Barnett, I. Tezaur, A. Mota. "The Schwarz alternating method for the seamless coupling of nonlinear reduced order models and full order models", CSRI Summer Proceedings 2023, Sandia National Laboratories. https://arxiv.org/abs/2210.12551
- C. Wentland, F. Rizzi, J. Barnett, I. Tezaur. "The role of interface boundary conditions and sampling strategies for Schwarz-based coupling of projection-based reduced order models", J. Comput. Appl. Math., 465 116584, 2025

Schwarz Couplings Involving Physics-Informed Neural Networks (PINNs):

W. Snyder, I. Tezaur, C. Wentland. "Domain decomposition-based coupling of PINNs via the Schwarz alternating method", CSRI Summer Proceedings 2023, Sandia National Laboratories. https://arxiv.org/abs/2311.00224



















I. Tezaur

J. Barnett

I. Moore

E. Parish

C. Wentland


A. Gruber C. Rodriguez W. Snyder


G. Sambataro


5 Outline

- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



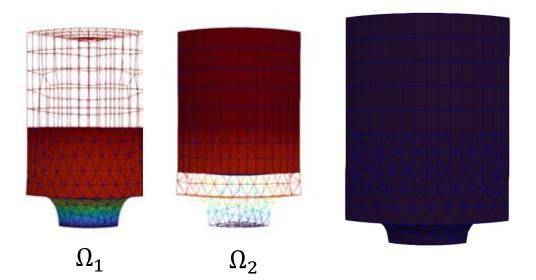









Motivation for Novel Contact Enforcement Algorithm Development 🛅



- Stable, accurate and robust methods for simulating mechanical **contact** are extremely important in computational solid mechanics
 - > Example scenarios where contact arises: touching surfaces, sliding, tightened bolts, impact, ...



Above: gears in contact within MEMS device. From sandia.gov/media. Below: oblique cylinder impact simulated using Sandia's ALEGRA code.




Motivation for Novel Contact Enforcement Algorithm Development in



- Stable, accurate and robust methods for simulating mechanical **contact** are extremely important in computational solid mechanics
 - > Example scenarios where contact arises: touching surfaces, sliding, tightened bolts, impact, ...


Two-step process to the computational simulation of contact:

- 1. Proximity search
- 2. Contact enforcement step



Above: gears in contact within MEMS device. From sandia.gov/media.

Below: oblique cylinder impact simulated using Sandia's ALEGRA code.




Motivation for Novel Contact Enforcement Algorithm Development

1

- Stable, accurate and robust methods for simulating **mechanical** contact are extremely important in computational solid mechanics
 - Example scenarios where contact arises: touching surfaces, sliding, tightened bolts, impact, ...


Two-step process to the computational simulation of contact:

- 1. Proximity search: computer science problem, has received much attention due to importance in video game development ©
- 2. Contact enforcement step



Above: gears in contact within MEMS device. From sandia.gov/media.

Below: oblique cylinder impact simulated using Sandia's ALEGRA code.




Motivation for Novel Contact Enforcement Algorithm Development

- Stable, accurate and robust methods for simulating **mechanical** contact are extremely important in computational solid mechanics
 - Example scenarios where contact arises: touching surfaces, sliding, tightened bolts, impact, ...


Two-step process to the computational simulation of contact:

- 1. Proximity search: computer science problem, has received much attention due to importance in video game development ©
- 2. Contact enforcement step: existing methods (penalty, Lagrange multiplier, augmented Lagrangian) suffer from poor performance 🖰
 - Long simulation times
 - Lack of accuracy
 - Lack of robustness



Above: gears in contact within MEMS device. From sandia.gov/media.

Below: oblique cylinder impact simulated using Sandia's ALEGRA code.



Motivation for Novel Contact Enforcement Algorithm Development



- Stable, accurate and robust methods for simulating mechanical contact are extremely important in computational solid mechanics
 - Example scenarios where contact arises: touching surfaces, sliding, tightened bolts, impact, ...




- 1. Proximity search: computer science problem, has received much attention due to importance in video game development ©
- 2. Contact enforcement step: existing methods (penalty, Lagrange multiplier, augmented Lagrangian) suffer from poor performance 🖰
 - Long simulation times
 - Lack of accuracy
 - Lack of robustness



Production codes do not always have the best, most robust methods.


This talk: new approach for simulating multiscale mechanical contact using the non-overlapping Schwarz alternating method.





Above: gears in contact within MEMS device. From sandia.gov/media.


Below: oblique cylinder impact simulated using Sandia's ALEGRA code.




Outline


- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



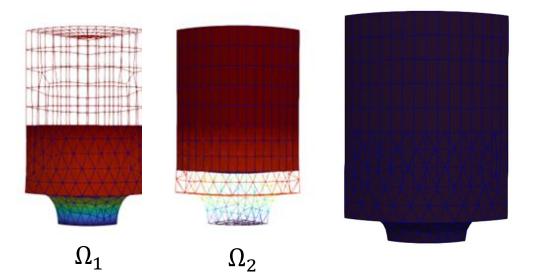








 $t_{1,0}$

 $t_{1.1}$

Non-Overlapping Schwarz Contact Formulation

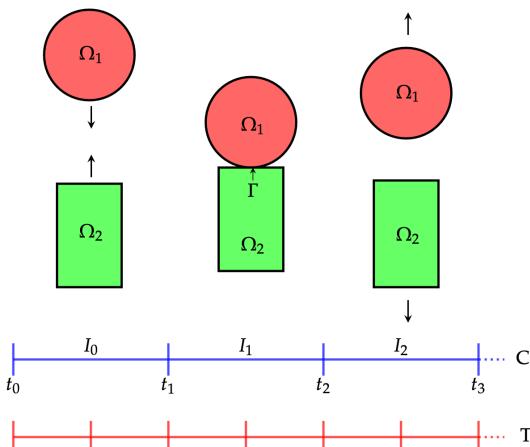

 $t_{1,3}$

 $t_{2,5}$

 $t_{2,4}$

 $t_{1,2}$

 $t_{2.3}$

 $t_{1,4}$

 $t_{2,6}$


 $t_{1,5}$

 $t_{2,8}$


 $t_{2,7}$

Ingredients:

- > Domain decomposition
- \triangleright Discretization and time-stepper in Ω_1 (red)
- \triangleright Discretization and time-stepper in Ω_2 (green)
- \triangleright Controller time-stepper (blue): defines global timesteps $I_0, I_1, ...$ at which subdomains are synchronized



Non-Overlapping Schwarz Contact Formulation

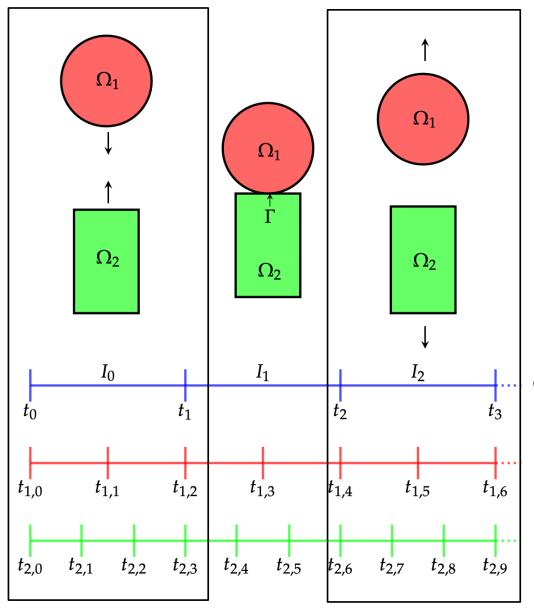

Ingredients:

- > Domain decomposition
- \triangleright Discretization and time-stepper in Ω_1 (red)
- \triangleright Discretization and time-stepper in Ω_2 (green)
- \succ Controller time-stepper (blue): defines global timesteps $I_0, I_1, ...$ at which subdomains are synchronized
- Problem is solved without any Schwarz iteration in time intervals I_0 and I_2 , as there is no contact.

Controller time stepper

Time integrator for Ω_1

Time integrator for Ω_2

 $t_{2,0}$

 $t_{2,2}$

 $t_{2,3}$

 $t_{2,4}$

 $t_{2,5}$


 $t_{2,6}$

 $t_{2.7}$

 $t_{2.8}$

Non-Overlapping Schwarz Contact Formulation



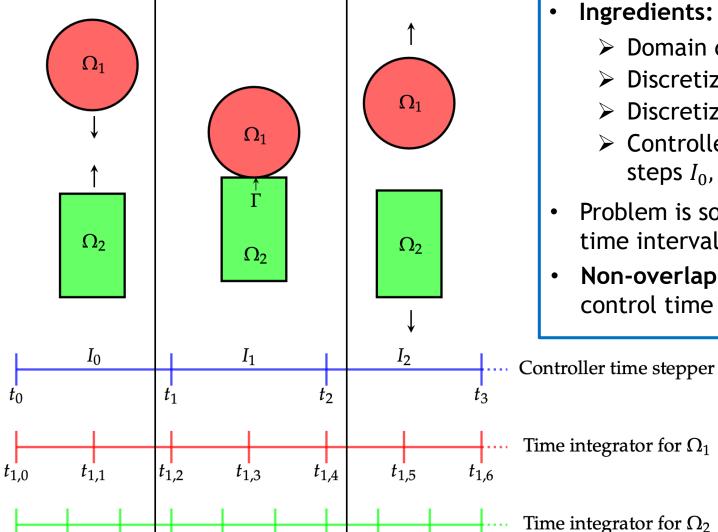

Ingredients:


- > Domain decomposition
- \triangleright Discretization and time-stepper in Ω_1 (red)
- \triangleright Discretization and time-stepper in Ω_2 (green)
- > Controller time-stepper (blue): defines global timesteps $I_0, I_1, ...$ at which subdomains are synchronized
- Problem is solved without any Schwarz iteration in time intervals I_0 and I_2 , as there is no contact.
- Non-overlapping Schwarz algorithm only applied in control time interval I_1 , when **contact is detected**.

Contact Criteria

- **Overlap:** interpenetration of subdomains
- **Compression:** positive normal traction
- **Persistence:** was in contact previous step

Non-Overlapping Schwarz Contact Formulation

- **Key idea:** a contact problem can be viewed as **coupled problem** while 2+ bodies are in contact
 - > Alternating Dirichlet-Neumann (traction) Schwarz iteration is applied once interpenetration has been detected, to correct the interpenetration.

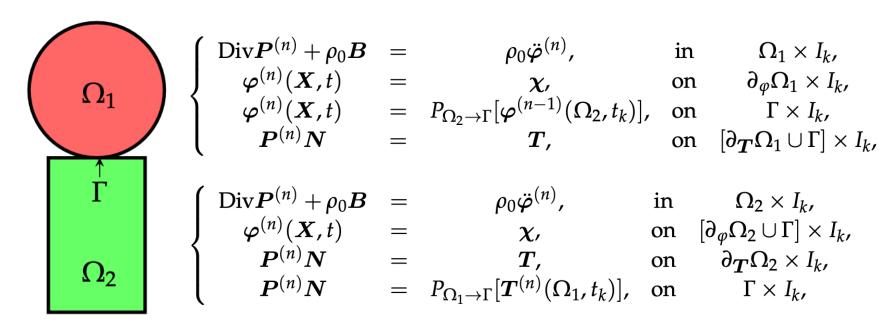


There are no contact constraints!

Contact constraints replaced with **BCs** applied iteratively at contact boundaries.

Outline


- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



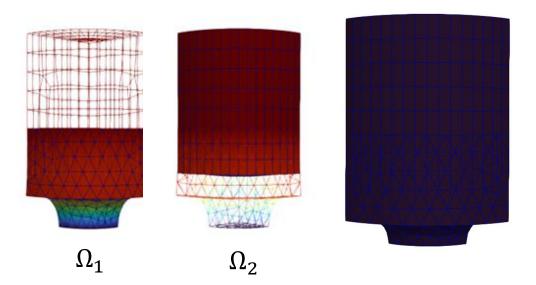





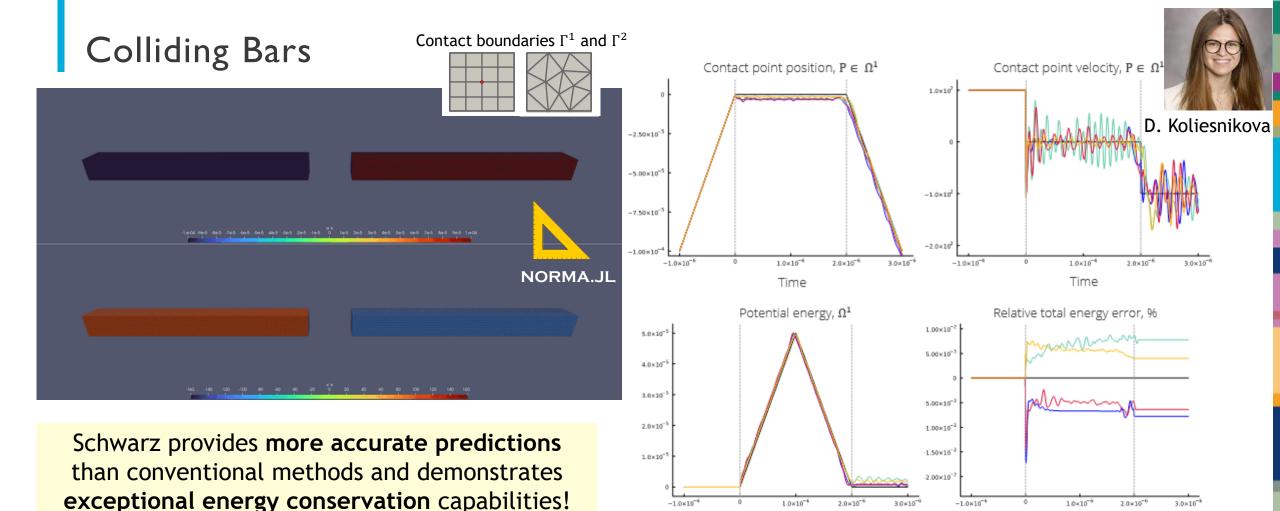

Time

	Elements type		Mesh size		Number of nodes		Time step		Average number of
	Ω^1	Ω^2	Ω^1	Ω^2	Ω^1	Ω^2	Ω^1	Ω^2	Schwarz iterations
Imp-Imp Schwarz	HEX8	HEX8	$1/2 \cdot 10^{-4}$		189		1 · 10 ⁻⁸		7
Exp-Exp Schwarz	TETRA4	TETRA4	$1/2 \cdot 10^{-4}$		199		1 · 10 ⁻⁹		6
Imp-Exp Schwarz	HEX8	TETRA4	$1/2 \cdot 10^{-4}$		189	199	$1/2 \cdot 10^{-8}$	$1 \cdot 10^{-9}$	6
Exp-Imp Schwarz	HEX8	TETRA4	$1/4 \cdot 10^{-4}$	$1/3 \cdot 10^{-4}$	1025	745	1 · 10-9	1/2 · 10 ⁻⁸	8

Chatter can be mitigated via "naïve" stabilization approach which sets contact accelerations to 0 [Mota, Koliesnikova, IT, et al., 2025].

Time

References on SAM for Contact

- J. Hoy, I. Tezaur, A. Mota. "The Schwarz alternating method for multiscale contact mechanics". in *Computer Science Research Institute Summer Proceedings 2021*, J.D. Smith and E. Galvan, eds., Technical Report SAND2021-0653R, Sandia National Laboratories, 360-378, 2021.
- A. Mota, D. Koliesnikova, I. **Tezaur**, J. Hoy. "A Fundamentally New Coupled Approach to Contact Mechanics via the Dirichlet-Neumann Schwarz Alternating Method", *Int. J. Numer. Meth. Engng.*, 126(9) e70039, 2025.





I. Tezaur



A. Mota



D. Koliesnikova



B. Phung





J. Hoy

Outline

- 1. Schwarz Alternating Method (SAM) for Coupling of Full Order Models (FOMs) in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 2. SAM for FOM-ROM* and ROM-ROM Coupling in Solid Mechanics
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 3. SAM as a Novel Contact Enforcement Method
 - Motivation & Background
 - Formulation
 - Numerical Examples
- 4. Summary



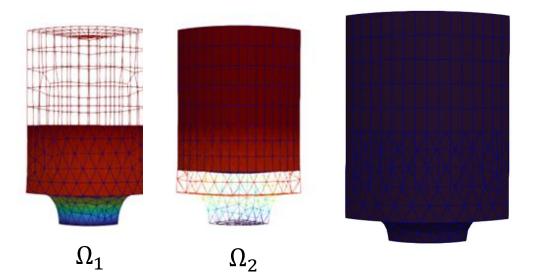





Summary

The Schwarz alternating method has been developed for concurrent multiscale coupling of conventional and data-driven models, and as a novel contact enforcement algorithm.

- © Coupling is *concurrent* (two-way).
- © Ease of implementation into existing massively-parallel HPC codes.
- © "Plug-and-play" framework: simplifies task of meshing complex geometries!
 - ② Ability to couple regions with different non-conformal meshes, different element types and different levels of refinement.
 - © Ability to use *different solvers* (*including ROM/FOM*) and *time-integrators* in different regions.
- © Scalable, fast, robust on real engineering problems
- © Coupling does not introduce *nonphysical artifacts*.
- © *Theoretical* convergence properties/guarantees.
- © A *promising alternative* to conventional *contact* methods

Ongoing & Future Research Directions

Production Applications

- 4-way multiscale coupling in salt caverns for Strategic Petroleum Reserve (SPR)
- Schwarz coupling for J-integral around crack front on pressure vessel
- Multiscale coupling for stronglinks
- Schwarz multiscale coupling for electronics package survivability

Performance Improvements

- Acceleration of Schwarz
- Asynchronous additive Schwarz on GPUs


Automated & Adaptive Schwarz


- Automated optimization of DD with multiple constraints
- Automated criteria to determine appropriate use of less refined or reducedorder models w/o sacrificing accuracy


Schwarz for ROM/Data-Driven Model Coupling

- Non-overlapping Schwarz + OpInf
- Schwarz + Deep NN-based ROMs
- Schwarz + kernel-based ROMs
- Fully non-intrusive ROM-FOM coupling (w/ K. Willcox & N. Aretz, UT Austin)
- On-the-fly switching between ROMs and FOMs
- Implementation in SIERRA/SM



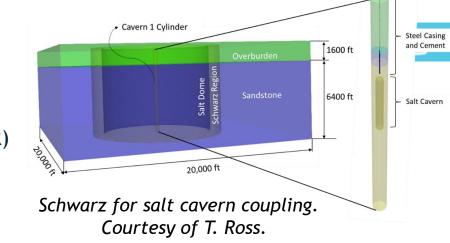

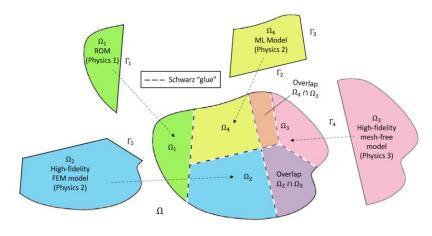




Practical Takeaways Summary

- Meshing is no joke!
- Implementation is a big deal!
 - > Legacy production codes can be around for decades, and the "best" method theoretically may not "win"
- Online speedups are not everything!
 - > "Fast is fine, but accuracy is everything." Wyatt Earp
- Know your target!
 - Assess your methods in terms of QOIs relevant to your users/customers
- Have pity on whoever is using your method!
 - > Important considerations: usability, robustness, minimal tuning knobs/parameters, etc.
- Don't be afraid to leave the sandbox!
 - > When you apply your approach to more complex problems, there are new opportunities for innovation.



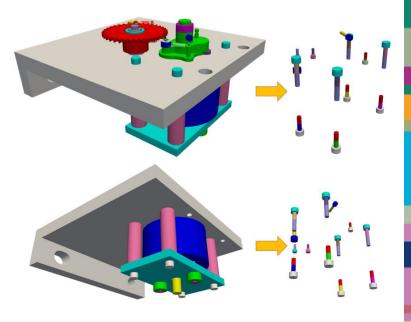



"We've made this elegantly simple app so complicated with features that no one knows how to use it."



<u>Students:</u> please consider Sandia and other national labs as a potential employer for summer internships and when you graduate!


- Sandia is a great place to work!
 - Lots of *interesting* problems that require *fundamental research* in applied math/computational science and impact *mission-critical applications*.
 - > Great work/life balance.
- Opportunities at/with Sandia:
 - > Internships
 - > Post doctorships
 - Several prestigious post doctoral fellowships (von Neumann, Collis, Truman, Hruby)
 - > Staff

Please see: www.sandia.gov/careers for info about current opportunities.





Thank you! Questions?















Contact: <u>ikalash@sandia.gov</u> www.sandia.gov/~ikalash















Start of Backup Slides

Advertisement: Special Issue of Computing in Science & Engineering (CiSE), an IEEE Journal



Home / Digital Library / Magazines / CiSE

Call For Papers: Special Issue on Controversies on the Usage of AI/ML for Science and Engineering

CiSE seeks submissions for this upcoming special issue.

Contact: Irina Tezaur ikalash@sandia.gov

Due date: Jan. 21, 2026

Publication date: Summer-Fall 2026



Goal: Give authors the opportunity to present their perspectives on potentially controversial topics involving the usage of AI/ML in science and engineering applications.


Authors are encouraged to include ideas on how to resolve perceived controversies and/or address/mitigate the challenges/open questions these controversies relate to.

Anticipated contributions:

- Research papers describing new methods/frameworks in the context of this special issue's theme
- Survey papers evaluating/comparing existing methods
- Higher-level evidence-based position papers


Theory: Overlapping SAM for Quasistatic Multiscale Coupling*



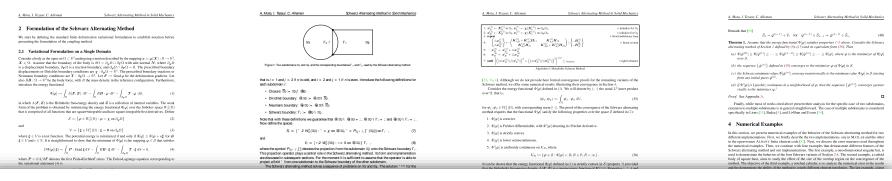

Theorem 1. Assume that the energy functional $\Phi[\varphi]$ satisfies properties 1–5 above. Consider the Schwarz alternating method of Section 2 defined by (9)–(13) and its equivalent form (39). Then

- (a) $\Phi[\tilde{\varphi}^{(0)}] \ge \Phi[\tilde{\varphi}^{(1)}] \ge \cdots \ge \Phi[\tilde{\varphi}^{(n-1)}] \ge \Phi[\tilde{\varphi}^{(n)}] \ge \cdots \ge \Phi[\varphi]$, where φ is the minimizer of $\Phi[\varphi]$ over S.
- (b) The sequence $\{\tilde{\varphi}^{(n)}\}\$ defined in (39) converges to the minimizer φ of $\Phi[\varphi]$ in S.
- (c) The Schwarz minimum values $\Phi[\tilde{\varphi}^{(n)}]$ converge monotonically to the minimum value $\Phi[\varphi]$ in S starting from any initial guess $\tilde{\varphi}^{(0)}$.

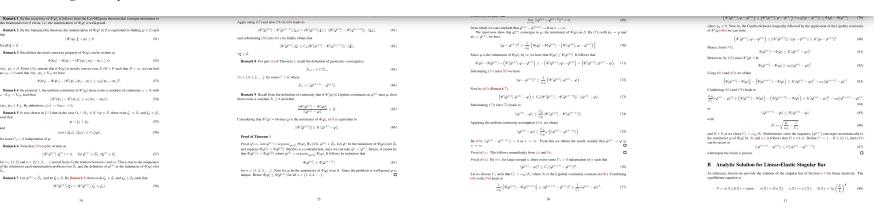



Theory: Overlapping SAM for Dynamic Multiscale Coupling*



- Like for quasistatics, dynamic alternating Schwarz method converges provided each single-domain problem is **well-posed** and **overlap region** is **non-empty**, under some **conditions** on Δt .
- *Well-posedness* for the dynamic problem requires that action functional $S[\varphi] := \int_{I} \int_{\Omega} L(\varphi, \dot{\varphi}) dV dt$ be *strictly convex* or *strictly concave*, where $L(\varphi, \dot{\varphi}) := T(\dot{\varphi}) + V(\varphi)$ is the Lagrangian.
 - \triangleright This is studied by looking at its second variation $\delta^2 S[\boldsymbol{\varphi}_h]$
- We can show assuming a *Newmark* time-integration scheme that for the *fully-discrete* problem:


$$\delta^2 S[\boldsymbol{\varphi}_h] = \boldsymbol{x}^T \left[\frac{\gamma^2}{(\beta \Delta t)^2} \boldsymbol{M} - \boldsymbol{K} \right] \boldsymbol{x}$$

- $\succ \delta^2 S[\varphi_h]$ can always be made positive by choosing a *sufficiently small* Δt
- \blacktriangleright Numerical experiments reveal that Δt requirements for **stability/accuracy** typically lead to automatic satisfaction of this bound.



Bolted Joint (Overlapping SAM, Predictive): Animations



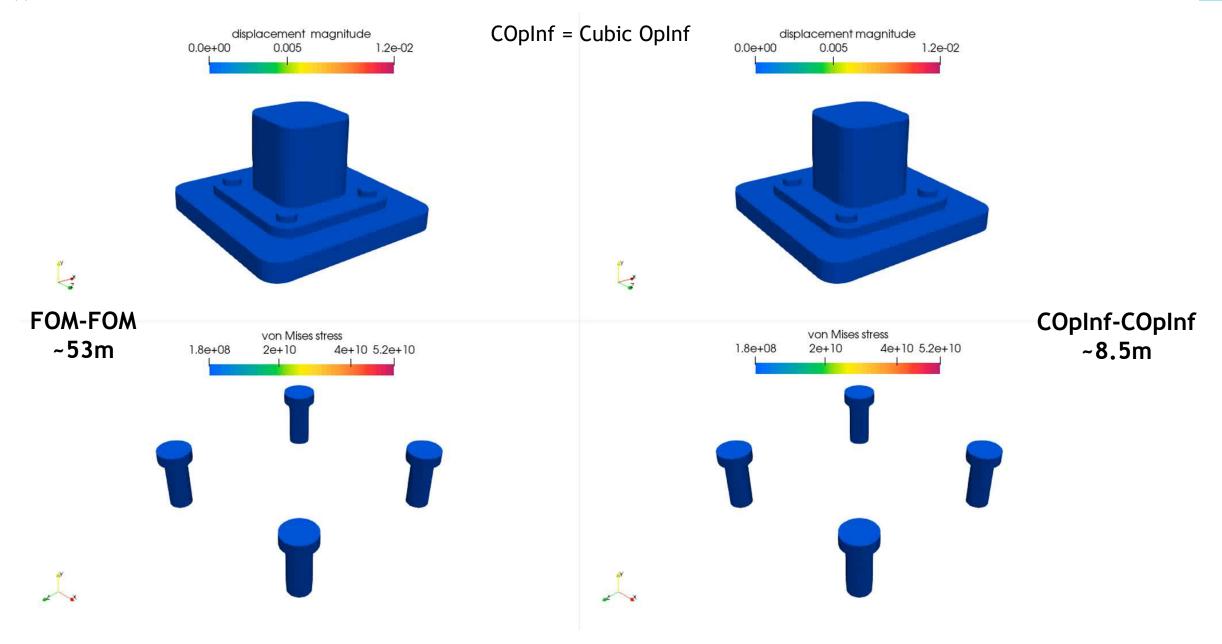

References on SAM for FOM-ROM and ROM-ROM Coupling (cont'd)

Schwarz Couplings Involving Intrusive Projection-Based ROMs:

- J. Barnett, I. Tezaur, A. Mota. "The Schwarz alternating method for the seamless coupling of nonlinear reduced order models and full order models", CSRI Summer Proceedings 2023, Sandia National Laboratories. https://arxiv.org/abs/2210.12551
- C. Wentland, F. Rizzi, J. Barnett, I. Tezaur. "The role of interface boundary conditions and sampling strategies for Schwarz-based coupling of projection-based reduced order models", J. Comput. Appl. Math., 465 116584, 2025

Schwarz Couplings Involving Physics-Informed Neural Networks (PINNs):


W. Snyder, I. Tezaur, C. Wentland. "Domain decomposition-based coupling of PINNs via the Schwarz alternating method", CSRI Summer Proceedings 2023, Sandia National Laboratories. https://arxiv.org/abs/2311.00224



















I. Tezaur

J. Barnett

I. Moore

E. Parish

C. Wentland

A. Gruber C. Rodriguez W. Snyder

G. Sambataro

Current Research Directions

Production Applications

- 4-way multiscale coupling in salt caverns for Strategic Petroleum Reserve (SPR)
- Schwarz coupling for J-integral around crack front on pressure vessel
- Multiscale coupling for stronglinks
- Schwarz multiphysics coupling for electronics package survivability

Performance Improvements

- Acceleration of Schwarz
- Asynchronous additive Schwarz on GPUs


Automated & Adaptive Schwarz


- Automated optimization of meshes/DD with multiple constraints
- Automated criteria to determine appropriate use of less refined or reducedorder models w/o sacrificing accuracy


Schwarz for ROM/Data-Driven Model Coupling

- Non-overlapping Schwarz + OpInf
- Schwarz + Deep NN-based ROMs
- Schwarz + kernel-based ROMs
- Fully non-intrusive ROM-FOM coupling (w/ K. Willcox & N. Aretz, UT Austin)
- On-the-fly switching between ROMs and FOMs
- Implementation in SIERRA/SM



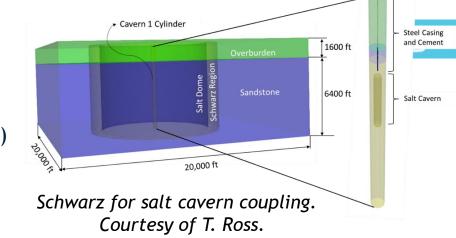

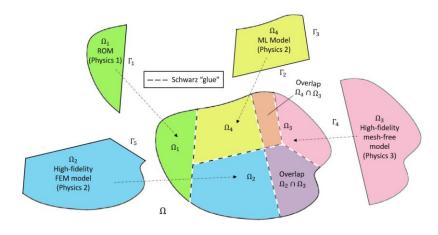



How We Use the Schwarz Alternating Method





AS A PRECONDITIONER FOR THE LINEARIZED SYSTEM



AS A SOLVER FOR THE COUPLED FULLY NONLINEAR **PROBLEM**

Theoretical Foundation

Using the Schwarz alternating as a *discretization method* for PDEs is natural idea with a sound *theoretical foundation*.


- <u>S.L. Sobolev (1936):</u> posed Schwarz method for *linear elasticity* in variational form and *proved method's convergence* by proposing a convergent sequence of energy functionals.
- S.G. Mikhlin (1951): proved convergence of Schwarz method for general linear elliptic PDEs.
- P.-L. Lions (1988): studied convergence of Schwarz for *nonlinear* monotone elliptic problems using max principle.
- A. Mota, I. Tezaur, C. Alleman (2017): proved convergence of the alternating Schwarz method for finite deformation quasi-static **nonlinear PDEs** (with energy functional $\Phi[\varphi]$) with a **geometric** convergence rate.

$$\boldsymbol{\Phi}[\boldsymbol{\varphi}] = \int_{B} A(\boldsymbol{F}, \boldsymbol{Z}) dV - \int_{B} \boldsymbol{B} \cdot \boldsymbol{\varphi} dV$$


$$\nabla \cdot \boldsymbol{P} + \boldsymbol{B} = \boldsymbol{0}$$



S.L. Sobolev (1908 - 1989)



S.G. Mikhlin (1908 - 1990)




P.- L. Lions (1956-)



A. Mota, I. Tezaur, C. Alleman


Cuboid Problem



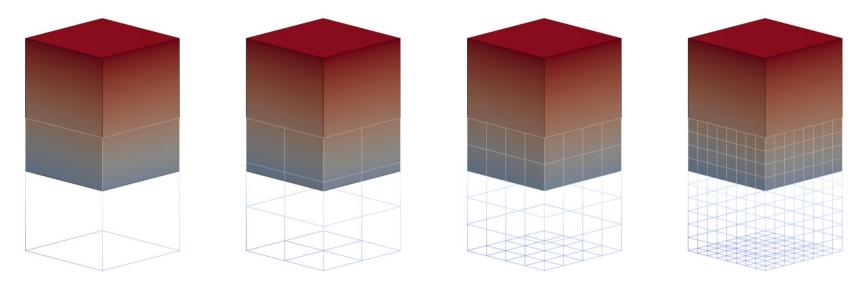

- Coupling of *two cuboids* with square base (above).
- *Neohookean*-type material model.



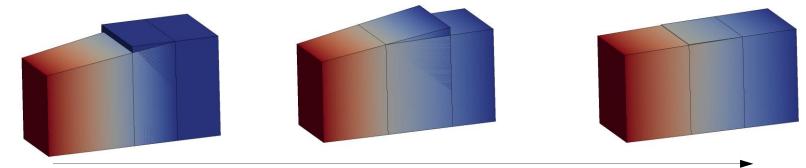

Schwarz Iteration


Cuboid Problem: Convergence and Accuracy


- Top right: convergence of the cuboid problem for different mesh sizes and fixed overlap volume fraction. The Schwarz alternating method converges *linearly*.
- **Bottom right:** convergence factor μ as a function of overlap volume and different mesh. There is *faster* linear convergence with increasing overlap volume fraction.

$$\Delta y^{(m+1)} \le \mu \Delta y^{(m)}$$

Below: relative errors in displacement and stress w.r.t. single-domain reference solution. Errors are on the order of machine precision.


Subdomain	u_3 relative error	σ_{33} relative error
Ω_1	1.24×10^{-14}	2.31×10^{-13}
Ω_2	7.30×10^{-15}	3.06×10^{-13}

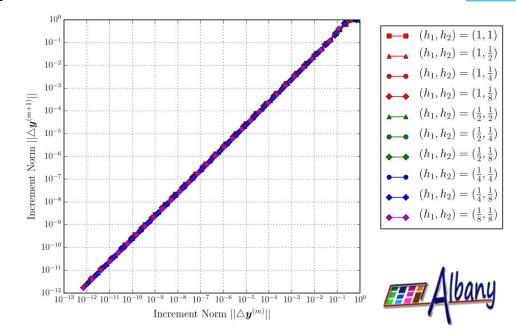

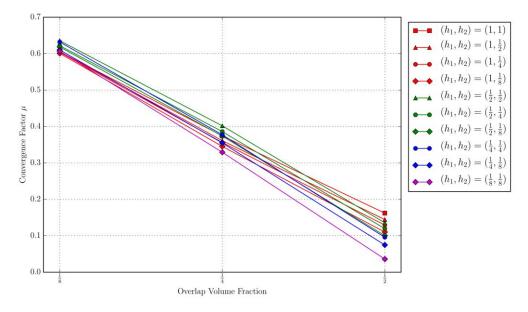

Notched Cylinder



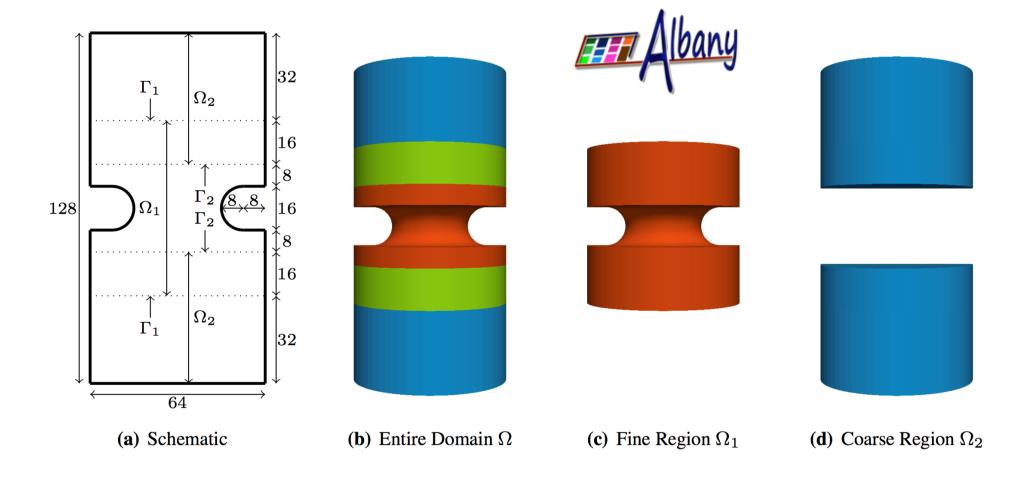

- Notched cylinder that is stretched along its axial direction.
- Domain decomposed into two subdomains.
- *Neohookean*-type material model.

Notched Cylinder: Coupling Different Materials



The Schwarz method is capable of coupling regions with different material models.

- Notched cylinder subjected to tensile load with an *elastic* and *J2 elasto-plastic* regions.
- Coarse region is elastic and fine region is elasto-plastic.
- The **overlap region** in the first mesh is nearer the notch, where plastic behavior is expected.


Overlap far from notch.

Overlap near notch.

Coupled regions

Coarse, elastic region


Fine, elasto-plastic region

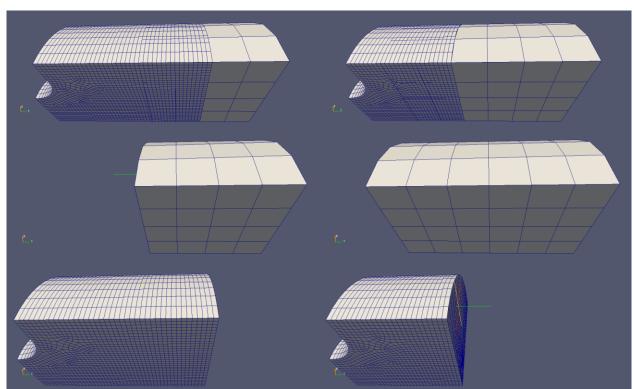

Notched Cylinder: TET - HEX Coupling



- The Schwarz alternating method is capable of coupling different mesh topologies.
- The notched region, where stress concentrations are expected, is *finely* meshed with tetrahedral elements.
- The top and bottom regions, presumably of less interest, are meshed with coarser hexahedral elements.

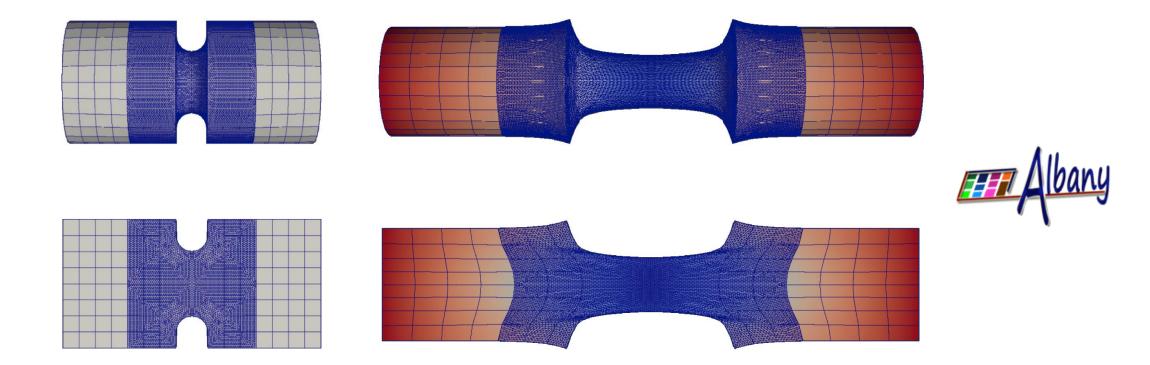



Notched Cylinder: TET - HEX Coupling



u3 error ___5.820e-05



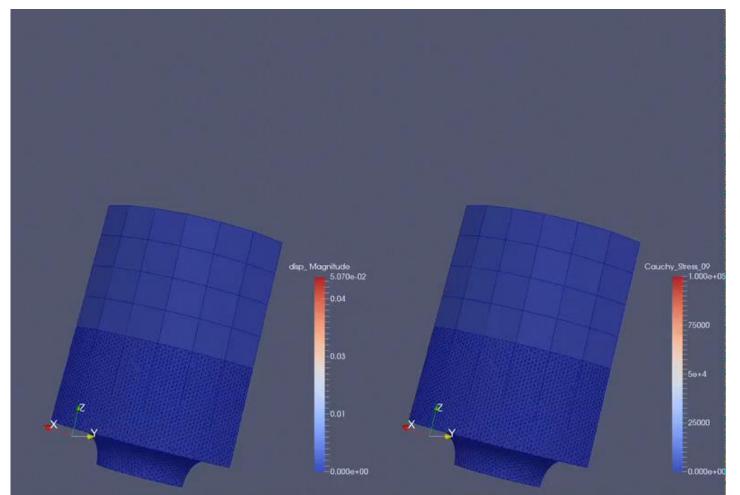

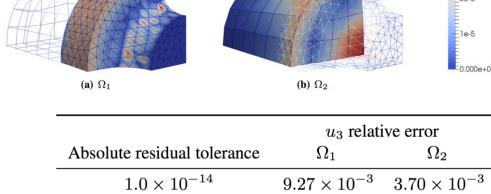

 Relative errors in displacement w.r.t. single-domain reference solution are dominated by geometric (rather than coupling) error.


Notched Cylinder: Coupling Different Materials



Need to be careful to do domain decomposition so that material models are *consistent* in overlap region.

- When the *overlap* region is *far from the notch*, no plastic deformation exists in it: the coarse and fine regions predict the same behavior.
- When the *overlap* region is *near the notch*, plastic deformation spills onto it and the two models predict different behavior, affecting convergence adversely.



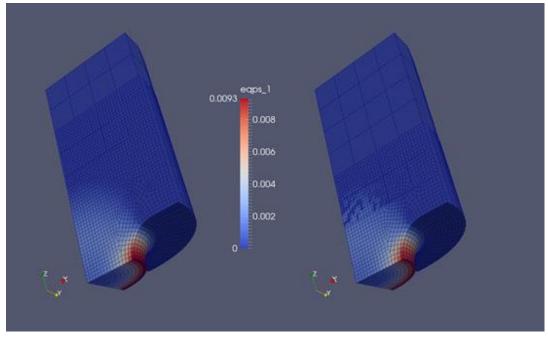


Overlap far from notch.

Overlap near notch.

Elastic Wave Propagation

- Linear elastic *clamped beam* with Gaussian initial condition for the z-displacement.
- Simple problem with analytical exact solution but very **stringent test** for discretization methods.
- Test Schwarz with **2** subdomains: $\Omega_0 = (0,0.001) \times (0,0.001) \times (0,0.75), \Omega_1 =$ $(0,0.001) \times (0,0.001) \times (0.25,1)$.

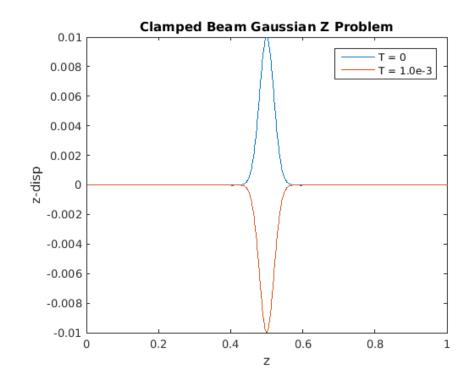


Left: Initial condition (blue) and final solution (red). Wave profile is negative of initial profile at time T = 1.0e-3.

Time-discretizations:


Newmark (implicit, explicit).

Meshes: HEX, TET



Elastic Wave: Different Integrators, Same Δt s



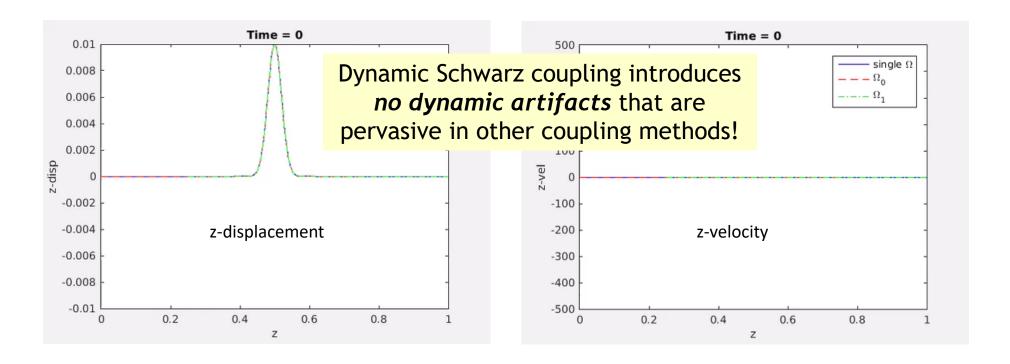


<u>Table 1:</u> Averaged (over times + domains) relative errors in z-displacement (blue) and z-velocity (green) for several different Schwarz couplings, 50% overlap volume fraction

	Implicit	-Implicit	Explicit(CM)-Implicit	Explicit(LM)-Implicit		
Conformal HEX - HEX	mal HEX - HEX 2.79e-3 7.32e-3		3.53e-3	8.70e-3	4.72e-3	1.19e-2	
Nonconformal HEX - HEX	2.90e-3	7.10e-3	2.82e-3	7.29e-3	2.84e-3	7.33e-3	
TET - HEX	2.79e-3	7.58e-3	3.52e-3	8.92e-3	4.72e-3	1.19e-2	

Elastic Wave: Different Integrators, Different Δt s



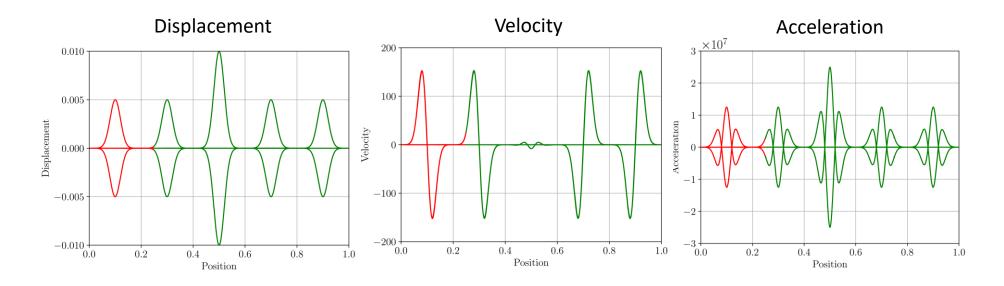


Figures above: Plots of displacement, velocity and acceleration for the elastic wave propagation problem using different time integrators (implicit and explicit) and different time steps (1e-2s and 2e-7s) for each subdomain, superimposed over the analytic single domain solution.

The analytic solution is *indistinguishable* from Schwarz solutions (hidden behind the solutions for Ω_0 (red) and Ω_1 (green))!


Laser Weld (Albany/LCM)

Single domain discretization




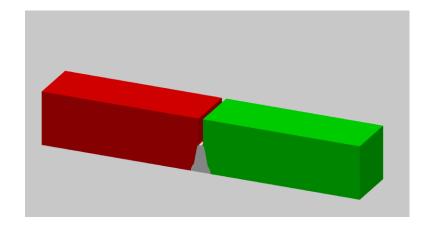






- **Isotropic elasticity** and J_2 **plasticity** with linear isotropic hardening.
- *Identical parameters* for weld and base materials for proof of concept, to become independent models.

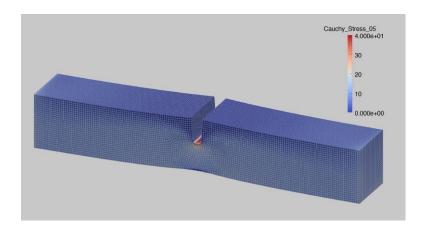


Coupled Schwarz discretization (50% reduction in model size)

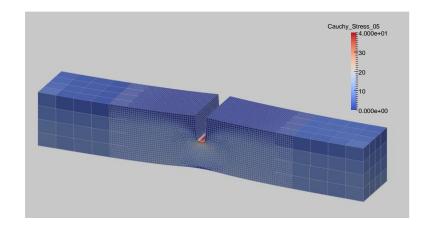


11


Laser Weld (Albany/LCM): Strong Scalability of Parallel Schwarz with DTK




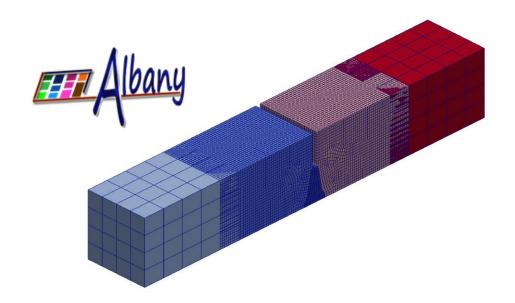

Near-ideal linear speedup (64-1024 cores).



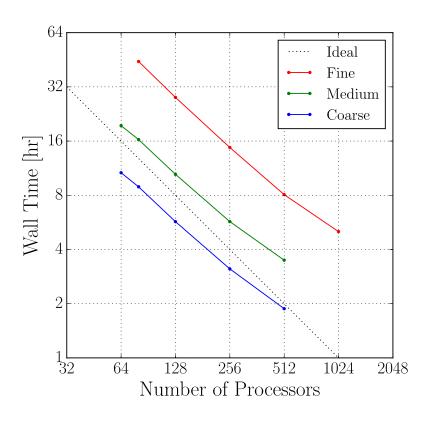





Data Transfer Kit (DTK)

Laser Weld: Improving Performance via Mesh/DD Design

- Production problem in SIERRA/SM with plasticity
- Overlapping Schwarz with naive DD/meshing takes $\sim 3 \times$ longer to run than single Ω solve

Schwarz performance can be improved by ~3× while maintaining the same accuracy by optimizing the mesh design

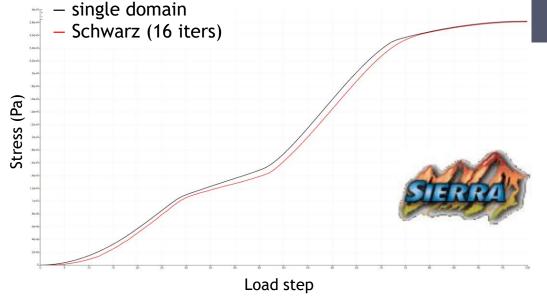


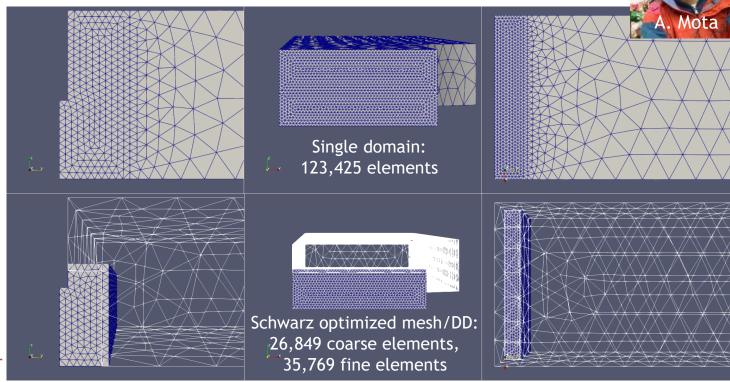

Simulation Type	Wall Time 64 procs			
Single domain	3 hr 17 min			
Overlapping SAM (16 iters, optimized DD and mesh design)	3 hr 37 min			

Bolted Joint Problem: Convergence Rate (Multiplicative Schwarz)



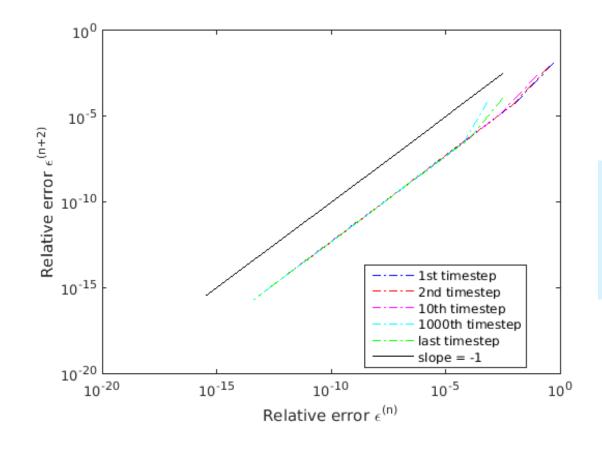





Linear convergence rate is observed for dynamic Schwarz algorithm, as expected from the theory.


Figure above: Convergence behavior of the dynamic Schwarz algorithm for the bolted joint problem


Scaling with Respect to the Number of Subdomains



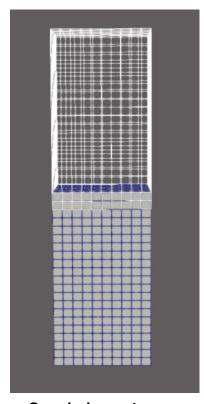

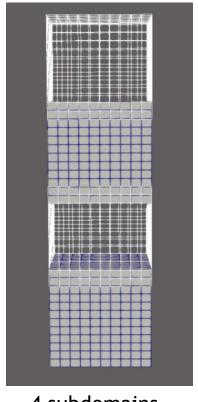

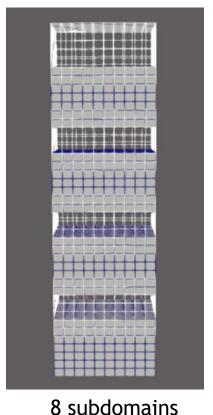

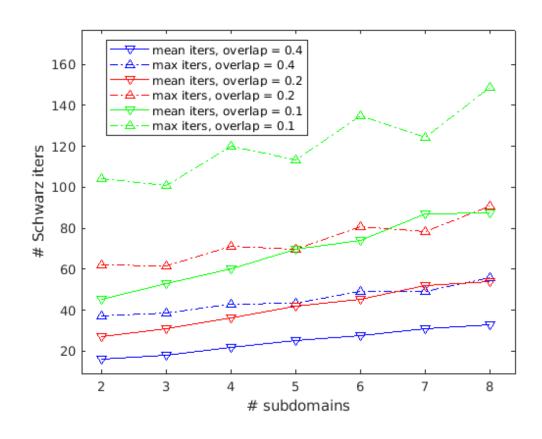

2 subdomains

4 subdomains

- Overlapping SAM scaling study from 2 to 8 subdomains
- Linear elastic cuboid problem, pulled from top at rate of $0.5 0.5 \cos(\pi t)$
- Overlap size varied: 0.4, 0.2 (above) and 0.1
- Same mesh resolution of 0.1 in all subdomains
- Linear convergence observed w.r.t. # subdomains



Generally, we do not target cases with >5-6 subdomains


Beam Bending (Non-Overlapping SAM)


- Linear elastic 3D beam initialized with given **velocity** μ at right nodeset.
- Non-overlapping domain decomposition into *two subdomains* (bottom right) discretized using *non-conformal HEX* meshes.
- Coupling via relaxed Dirichlet-Neumann **Schwarz** in SIERRA/SM.
- On average, took 10-15 Schwarz iterations to achieve relative tolerance of 1e-7 with relaxation parameter $\theta \in [0.3,0.5]$.
- SAM solution *indistinguishable* from single domain solution (right)









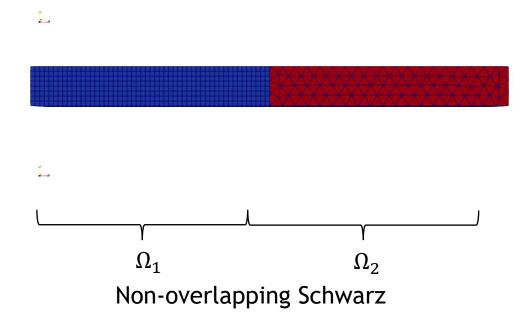

Schwarz Extensions to FOM-ROM and ROM-ROM Couplings



Choice of domain decomposition

- Overlapping vs. non-overlapping domain decomposition?
 - > Non-overlapping more flexible but typically requires more Schwarz iterations
- FOM vs. ROM subdomain assignment?
- > Do not assign ROM to subdomains where they have no hope of approximating solution Snapshot collection and reduced basis construction
- Are subdomains simulated independently in each subdomains or together?

Enforcement of boundary conditions (BCs) in ROM at Schwarz boundaries

- Strong vs. weak BC enforcement?
 - > Strong BC enforcement difficult for some models (e.g., cell-centered finite volume, PINNs)
- Optimizing parameters in Schwarz BCs for non-overlapping Schwarz?

Choice of hyper-reduction

- What hyper-reduction method to use?
 - > Application may require particular method (e.g., ECSW for solid mechanics problems)
- How to sample Schwarz boundaries in applying hyper-reduction?
 - > Need to have enough sample mesh points at Schwarz boundaries to apply Schwarz

Overlapping SAM-based Coupling for Non-Intrusive OpInf ROMs





Offline stage:

- Create **DD** of Ω into d overlapping subdomains Ω_i
- Perform a SAM-coupled all-FOM simulation on $\bigcup_i \Omega_i$
- Compute **POD** basis Φ_i on each Ω_i
- Assume a **functional form** for your ROM in Ω_i , informed by the functional form of the corresponding FOM
 - **Key question**: how to impose Schwarz BCs in OpInf ROMs?
 - \clubsuit Boundary transmission enters through learned source term $\widehat{B}_i g_i$ added to OpInf ROM dynamical system
 - ***** Further reduction achieved by expanding g_i in its own POD basis Φ_i^g and approximating $\widehat{B}_i g_i \approx \widehat{B}_i \widehat{g}_i = \widetilde{B}_i g_i$ where $\widehat{g}_i = \Phi_i^g g_i$
- Compute OpInf operators \widehat{A}_i , \widehat{H}_i and \widetilde{B}_i in each subdomain Ω_i by solving regularized OpInf LS minimization problem

Online stage:

• Apply Schwarz iteration procedure, with Schwarz BC transfer via pre-learned boundary contributions $\widetilde{B}_i g_i$

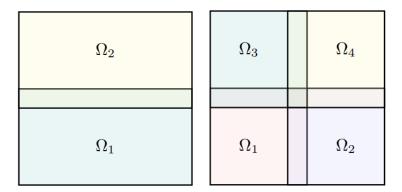

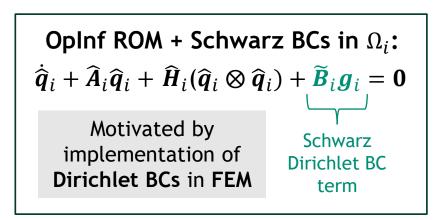


[Farcas et al., 2023] coupling formulation is **similar** but solves each subdomain problem **once** rather than iterating to convergence.

3D Linear Elastic Notched Cylinder Problem

- Geometry is *linear elastic notched cylinder* pulled from top **dynamically** to time $T_{max} = 1.5$ at rate of 0.0064t with $\Delta t = 0.005$
- Demonstration of SAM's ability to couple disparate meshes, element types and models: TET10 + FOM (notched region) and HEX8 + Linear OpInf with M = 30 modes (top region)
- **Linear OpInf** trained on 301 snapshots in time
- **Reproductive** problem for now

Key result: regularization parameter γ influences accuracy & **convergence**. Coupled models are remarkably **accurate**! Schwarz is *not* introducing **coupling error/artifacts**.

	Mean/max # Schwarz iters	Max z -disp rel error Ω_1	Max z -disp rel error Ω_2
FOM-FOM	5.83/9	_	_
FOM-OpInf ($\gamma = 1 \times 10^{-6}$)	5.09/8	2.9e-3	4.2e-3
FOM-OpInf ($\gamma = 1 \times 10^{-7}$)	5.48/9	3.8e-4	4.3e-4
FOM-OpInf ($\gamma = 1 \times 10^{-8}$)	5.54/9	1.3e-4	2.2e-4
FOM-OpInf ($\gamma = 1 \times 10^{-9}$)	5.52/9	3.1e-5	3.6e-5







 Ω_2 (HEX8 + OpInf)







FOM-OpInf

Movies above: z-displacement solutions for FOM-FOM and FOM-OpInf (M = 30, $\gamma = 1 \times 10^{-6}$)

Tension Specimen (Overlapping SAM)

QOpInf = Quadratic OpInf

• **Hyperelastic** variant of previous problem (Neohookean material model)


 TET10 - HEX overlapping coupling with implicit Newmark with same ∆t

 QOpInf models with M=2 POD modes, capturing 99.9999% snapshot energy

All results are predictive w.r.t. DBC applied

at top of holder

FOM-FOM

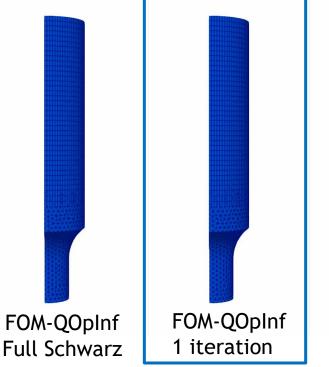

6.0e+10

5e+10

- 3e+10

- 2e+10

- 1e+10

		FOM-FOM	FOM-QOpInf	QOpInf-QOpInf	
	displacement	1	3.44e-4	5.73e-4	
Ω_1 rel errs	velocity		1.72e-2	1.83e-2	
	$\sigma_{\!vm}$ stress	1	3.41e-4	8.53e-4	
Ω_2 rel errs	displacement		2.50e-4	4.41e-4	
	velocity		1.86e-2	1.96e-2	
	$\sigma_{\!vm}$ stress		2.40e-3	6.00e-3	
CPU time	ı	8h 19m 29.5s	1h 21m 25.9s	4m 42.1s	
Mean/max # Schwarz iters	_	32.0/32	7.03/8	7.74/8	

• Relative errors of O(1e-4)-O(1e-3) are achieved for the displacement and von Mises stress (σ_{vm})

Impressive 6.13× and 106× speedups are achieved via FOM-QOpInf and QOpInf-QOpInf couplings, respectively!


Method of [Farcas et al., 2023] (1 Schwarz iteration) gives incorrect solution.




Torsion (Overlapping SAM)

- Neohookean material model
- TET4 HEX8 overlapping coupling with implicit-explicit Newmark having different Δt
- QOpInf-FOM coupled models with M=27 and M=30 POD modes, capturing 99.999% snapshot energy
- Prediction w.r.t. initial velocity (rotation speed/direction)
- (Linear) OpInf-FOM coupling insufficient

		FOM-FOM	QOpInf-FOM reproductive	QOpInf-FOM predictive	Œ
	displacement	1	2.67e-3	4.32e-2	
Ω_1 rel errs	velocity	1	3.56e-2	1.49e-1	
	displacement	1	1.13e-3	2.44e-2	
Ω_2 rel errs	velocity	1	1.12e-2	9.52e-2	
CPU time		39m 11.8s	1m 40.2s	1m 39.5s	
Mean/max # Schwarz iters	-	3.0/3	2.0/2	2.0/2	

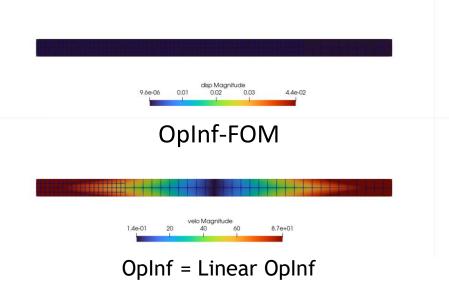

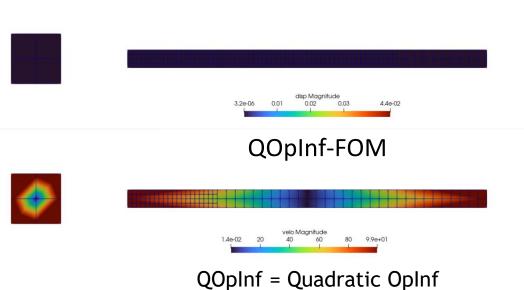




Torsion (Overlapping SAM)


- Neohookean material model
- TET4 HEX8 overlapping coupling with implicit-explicit Newmark having different Δt
- QOpInf-FOM coupled models with M=27 and M=30 POD modes, capturing 99.999% snapshot energy
- Prediction w.r.t. initial velocity (rotation speed/direction)
- (Linear) OpInf-FOM coupling insufficient

		FOM-FOM	QOpInf-FOM reproductive	QOpInf-FOM predictive	
_	displacement	1	2.67e-3	4.32e-2	
Ω_1 rel errs	velocity	1	3.56e-2	1.49e-1	
_	displacement	1	1.13e-3	2.44e-2	
Ω_2 rel errs	velocity	1	1.12e-2	9.52e-2	
CPU time	-	39m 11.8s	1m 40.2s	1m 39.5s	
Mean/max # Schwarz iters	-	3.0/3	2.0/2	2.0/2	

Relative errors are of O(1e-3)-O(1e-2) for displacement and velocity!

~23.5× speedups are achieved via QOpInf-FOM couplings

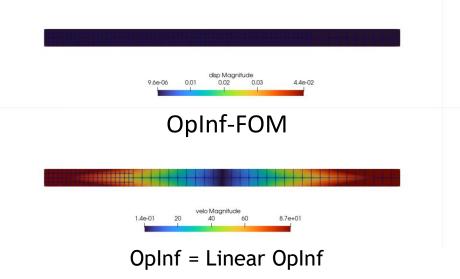


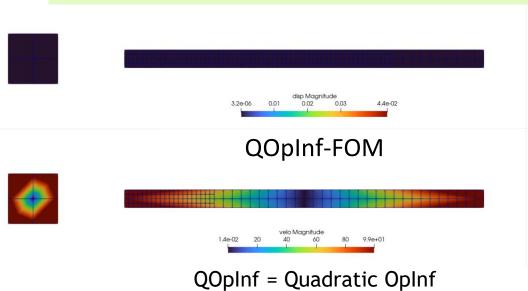




2D SWE: Takeaways

- Resolving overlap region discrepancy is critical
- Additive Schwarz exacerbates PROM dimension costs
- Available parallel cost savings
- Unexpected overlap error requires further investigation

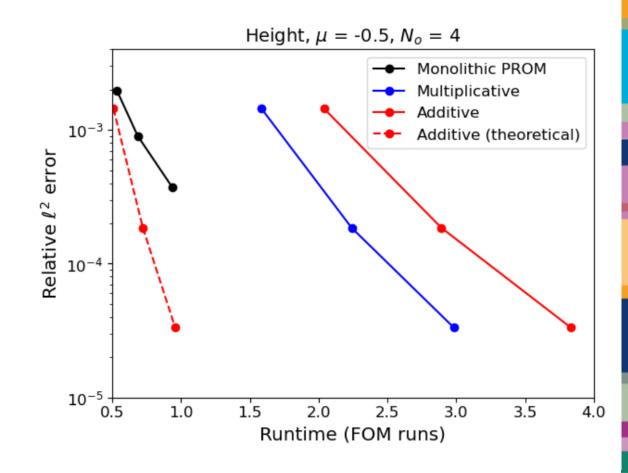

2D SWE: PROMs, additive Schwarz


- Additive does not affect accuracy, converging to same result
- As expected, additive incurs additional Schwarz iterations
- Increased PROM dimension also degrades convergence

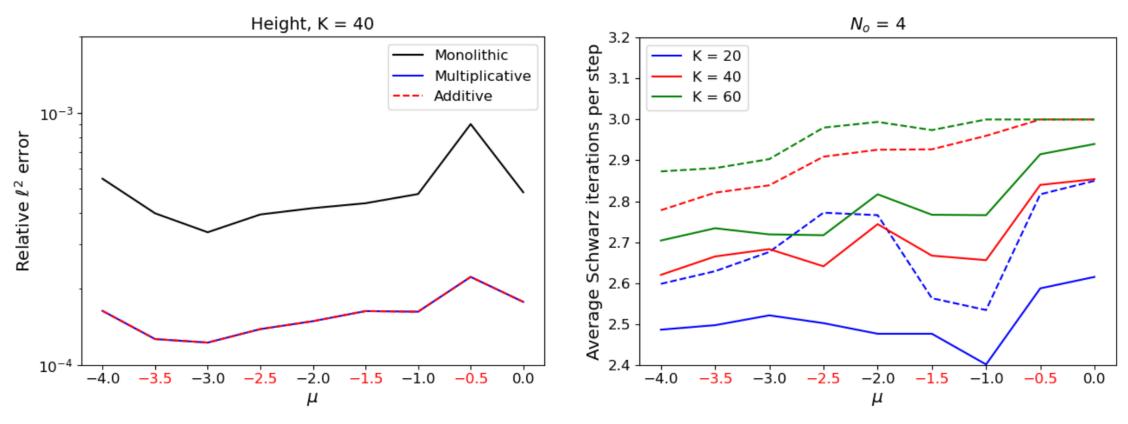

Solid: multiplicative, Dashed: additive

2D Euler: Schwarz PROMs

- PROM dimension has **less** effect on convergence, additive has **more**
- True cost savings unachievable without hyper-reduction

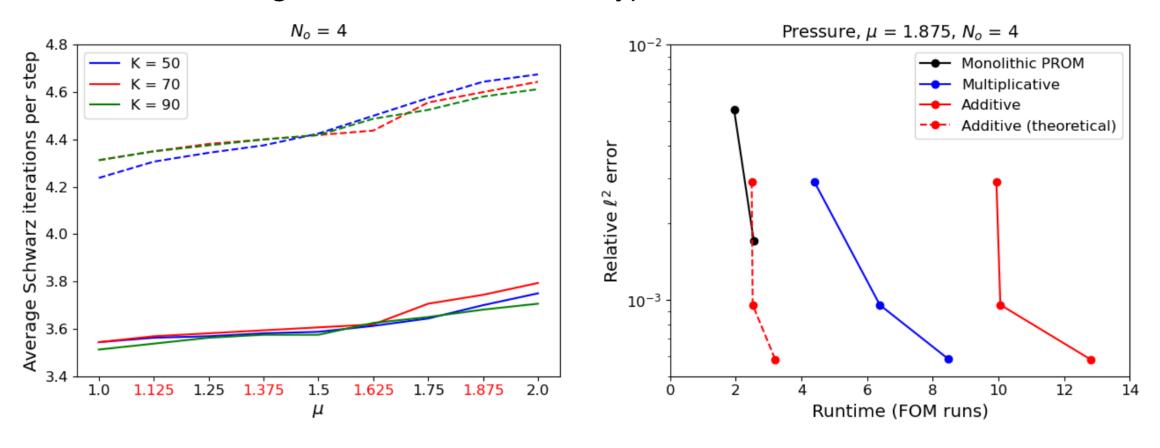

Solid: multiplicative, Dashed: additive

Schwarz for everyone

4-way multiscale coupling in salt caverns for SPR

Tonya Ross (8912)

Schwarz coupling for J-integral around crack front on pressure vessel

Dallin Morris (8752), Jay Foulk (8363)

Multiscale coupling for stronglinks

Rob Flicek (1556), Kiri Welsh (1556)

Schwarz multiscale coupling for electronics package survivability

Damon Burnett (7627), Christie Crandall (8752)

Automated optimization of DD with multiple constraints


Chris Wentland (8734)


Schwarz contact and Anderson acceleration

Brian Phung (8752)

Asynchronous Schwarz for GPU decomposition

Erik Boman (1465), Craig Hamel (1558)

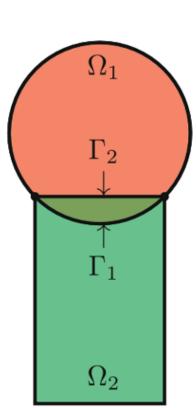

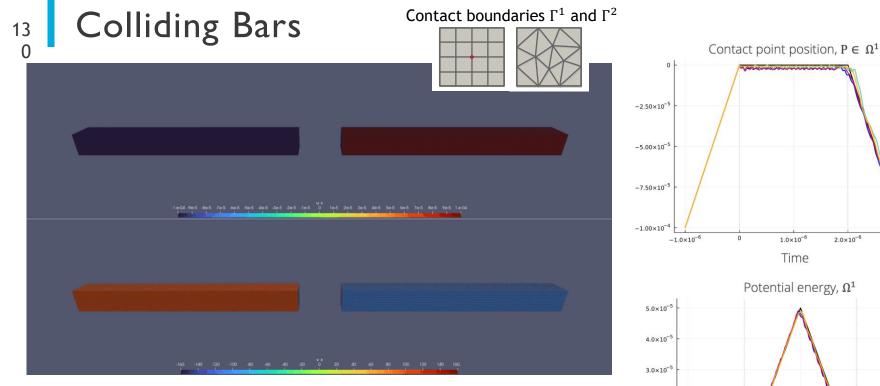

Schwarz provides more accurate predictions than conventional methods and demonstrates exceptional energy conservation capabilities!

		Elements type Mes		1esh size Number of nodes		Time step		Average number of		
		Ω^1	Ω^2	Ω^1	Ω^2	Ω^1	Ω^2	Ω^1	Ω^2	Schwarz iterations
	lmp-lmp Schwarz	HEX8	HEX8	1/2 ·	$1/2 \cdot 10^{-4}$		39	1 · 10 ⁻⁸		7
	Exp-Exp Schwarz	TETRA4	TETRA4	$1/2 \cdot 10^{-4}$		19	99	1 · 1	0^{-9}	6
	Imp-Exp Schwarz	HEX8	TETRA4	$1/2 \cdot 10^{-4}$		189	199	$1/2 \cdot 10^{-8}$	$1 \cdot 10^{-9}$	6
	Exp-Imp Schwarz	HEX8	TETRA4	$1/4 \cdot 10^{-4}$	1/3 · 10 ⁻⁴	1025	745	1 · 10-9	1/2 · 10 ⁻⁸	8



Contact point velocity, $P \in \Omega^1$

1.0×10⁻⁶

Time

Relative total energy error, %

1.0×10⁻⁶

Time

2.0×10⁻⁶

3.0×10⁻⁶

 -1.0×10^{2}

-2.0×10

5.00×10⁻³

 -1.0×10^{-6}

3.0×10⁻⁶

Time